监控 MetroCluster 配置的性能

Active IQ Unified Manager 9.10

NetApp
July 18, 2022

This PDF was generated from https://docs.netapp.com/zh-cn/active-iq-unified-manager-910/performance-checker/concept_volume_behavior_during_switchover_and_switchback.html on July 18, 2022. Always check docs.netapp.com for the latest.

目录

监控 MetroCluster 配置的性能 1
切换和切回期间的卷行为 1

监控 MetroCluster 配置的性能

通过 Unified Manager ，您可以监控 MetroCluster 配置中集群之间的写入吞吐量，以确定写入吞吐量较高的工作负载。如果这些高性能工作负载导致本地集群上的其他卷的 I/O 响应时间较长，则 Unified Manager 将触发性能事件以通知您。

当 MetroCluster 配置中的本地集群将其数据镜像到其配对集群时，数据将写入 NVRAM ，然后通过交换机间链路（ ISL ）传输到远程聚合。Unified Manager 会分析 NVRAM ，以确定写入吞吐量较高而过度利用 NVRAM 的工作负载，从而使 NVRAM 处于争用状态。

响应时间偏差超过性能阈值的工作负载称为 *victims_nvram* ，而写入 *NVRAM* 的吞吐量偏差高于正常值并导致出现争用的工作负载称为 *_bulbulles* 。由于只有写入请求才会镜像到配对集群，因此 Unified Manager 不会分析读取吞吐量。

Unified Manager 将 MetroCluster 配置中的集群视为单个集群。它不会区分配对集群，也不会关联每个集群的写入吞吐量。

切换和切回期间的卷行为

触发将发生原因活动卷从一个集群移动到灾难恢复组中另一个集群的切换或切回事件。集群上处于活动状态并向客户端提供数据的卷将停止，而另一集群上的卷将激活并开始提供数据。Unified Manager 仅监控处于活动状态且正在运行的卷。

由于卷会从一个集群移动到另一个集群，因此建议您监控这两个集群。Unified Manager 的一个实例可以监控 MetroCluster 配置中的两个集群，但有时两个位置之间的距离需要使用两个 Unified Manager 实例来监控这两个集群。下图显示了 Unified Manager 的一个实例：

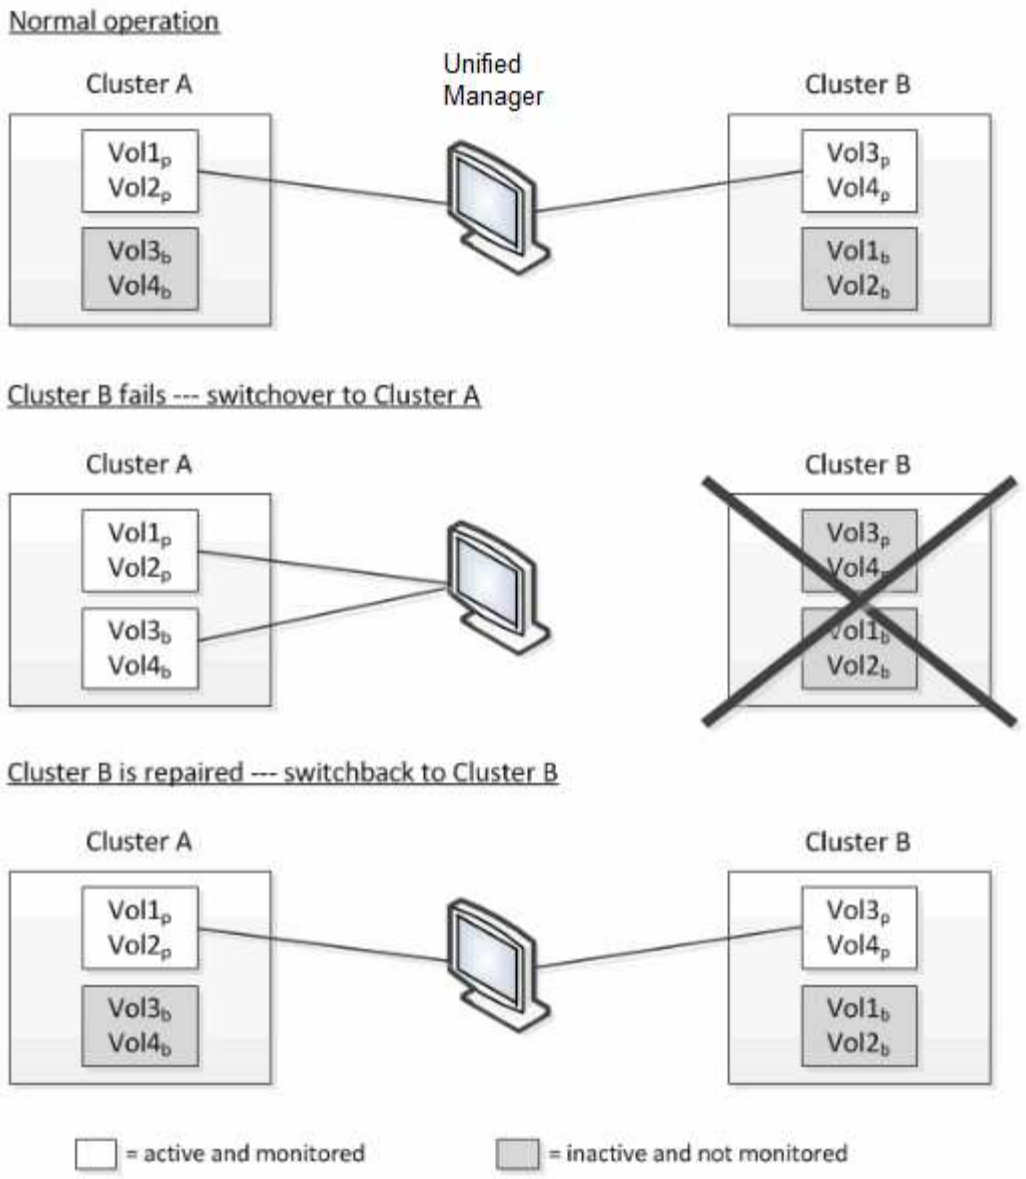

名称中包含 p 的卷表示主卷，名称中包含 b 的卷是由 SnapMirror 创建的镜像备份卷。

在正常操作期间：

- 集群 A 具有两个活动卷： Vol1p 和 Vol2p 。
- 集群 B 具有两个活动卷： Vol3p 和 Vol4p 。
- 集群 A 具有两个非活动卷： Vol3b 和 Vol4b 。
- 集群 B 具有两个非活动卷： Vol1b 和 Vol2b 。

Unified Manager 将收集与每个活动卷相关的信息（统计信息，事件等）。Vol1p 和 Vol2p 统计信息由集群 A 收集， Vol3p 和 Vol4p 统计信息由集群 B 收集

发生灾难性故障导致活动卷从集群 B 切换到集群 A 后：

- 集群 A 具有四个活动卷： Vol1p ， Vol2p ， Vol3b 和 Vol4b 。
- 集群 B 具有四个非活动卷： Vol3p ， Vol4p ， Vol1b 和 Vol2b 。

在正常操作期间， Unified Manager 将收集与每个活动卷相关的信息。但在这种情况下， Vol1p 和 Vol2p 统计信息由集群 A 收集， Vol3b 和 Vol4b 统计信息也由集群 A 收集

请注意， Vol3p 和 Vol3b 不是相同的卷，因为它们位于不同的集群上。适用于 Vol3p 的 Unified Manager 中的信息与 Vol3b 不同：

- 在切换到集群 A 期间，不会显示 Vol3p 统计信息和事件。
- 在首次切换时， Vol3b 看起来像一个新卷，没有历史信息。

修复集群 B 并执行切回后， Vol3p 将在集群 B 上再次处于活动状态，并显示切换期间的历史统计信息和统计信息缺口。除非发生另一次切换，否则无法从集群 A 查看 Vol3b：

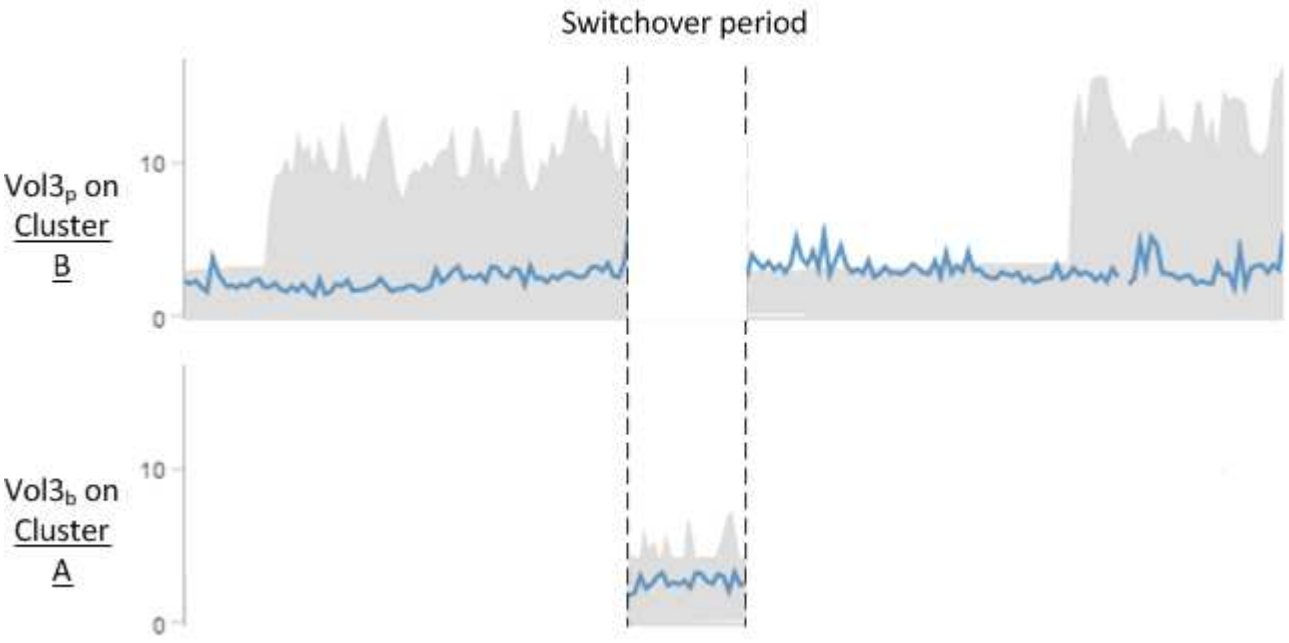

- 非活动的 MetroCluster 卷（例如，切回后集群 A 上的 Vol3b ）会通过消息 "`this volume was deleted` " 来标识。此卷并未实际删除，但 Unified Manager 当前不会监控此卷，因为它不是活动卷。
- 如果一个 Unified Manager 正在监控 MetroCluster 配置中的两个集群，则卷搜索将返回当时处于活动状态的任何卷的信息。例如，如果发生切换且 Vol3 在集群 A 上处于活动状态，则搜索 "`Vol3` " 将返回集群 A 上 Vol3b 的统计信息和事件

版权信息

版权所有©2022 NetApp、Inc.。保留所有权利。Printed in the U.S.版权所涵盖的本文档的任何部分不得以任何形式或任何手段复制、包括影印、录制、 磁带或存储在电子检索系统中—未经版权所有者事先书面许可。

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

本软件由NetApp按"原样"提供、不含任何明示或默示担保、包括但不限于适销性和特定用途适用性的默示担保、特此声明不承担任何责任。IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice.NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp.The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S.patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

商标信息

NetApp、NetApp标识和中列出的标记 http://www.netapp.com/TM 是NetApp、Inc.的商标。其他公司和产品名称可能是其各自所有者的商标。