安裝總覽

Astra Control Center

NetApp
July 15, 2022

This PDF was generated from https://docs.netapp.com/zh-tw/astra-control-center-2112/get-started/install_acc.html on July 15, 2022. Always check docs.netapp.com for the latest.

目錄

安裝總覽 1
使用標準程序安裝Astra Control Center 1
使用OpenShift作業系統集線器安裝Astra Control Center 18

安裝總覽

選擇並完成下列其中一個Astra Control Center安裝程序：

- "使用標準程序安裝Astra Control Center"
- "（如果您使用Red Hat OpenShift）使用OpenShift作業系統集線器安裝Astra Control Center"

使用標準程序安裝Astra Control Center

若要安裝Astra Control Center、請從NetApp支援網站下載安裝套件、並執行下列步驟、在您的環境中安裝Astra Control Center操作員和Astra Control Center。您可以使用此程序、在連線網際網路或無線環境中安裝Astra Control Center。

對於Red Hat OpenShift環境、您也可以使用 "替代程序" 使用OpenShift作業系統集線器安裝Astra Control Center。

您需要的是 **#8217** ；需要的是什麼

- "開始安裝之前、請先準備好環境以進行Astra Control Center部署"。
- 確保所有叢集操作員都處於健全狀態且可用。

  OpenShift範例：

  ```
  oc get clusteroperators
  ```

- 確保所有API服務均處於健全狀態且可供使用：

  OpenShift範例：

  ```
  oc get apiservices
  ```

- 您已在資料中心建立Astra Control Center的FQDN位址。

Astra Control Center安裝程序會執行下列作業：

- 將Astra元件安裝到「NetApp-acc」（或自訂命名）命名空間。
- 建立預設帳戶。
- 為此Astra Control Center執行個體建立預設的管理使用者電子郵件地址和預設的一次性密碼「ACC-<UUUID__of_installation_>」。此使用者被指派系統中的擁有者角色、第一次登入UI時即需要此角色。
- 協助您判斷所有Astra Control Center Pod都在執行中。
- 安裝Astra UI。

> 如果您使用的是Red Hat的Podman、而非Docker Engine、則可使用Podman命令來取代Docker命令。

請勿在整個安裝程序期間執行下列命令、以免刪除所有Astra Control Center Pod：「kubecl DELETE -f Astra _control_center_oper_deploy。yaml」

若要安裝Astra Control Center、請執行下列步驟：

- [Download the Astra Control Center bundle]
- [Unpack the bundle and change directory]
- [Add the images to your local registry]
- [Set up namespace and secret for registries with auth requirements]
- [Install the Astra Control Center operator]
- [Configure Astra Control Center]
- [Complete Astra Control Center and operator installation]
- [Verify system status]
- [Log in to the Astra Control Center UI]

執行以完成部署 "設定工作"。

下載Astra Control Center套裝組合

1. 請從下載Astra Control Center套裝組合（「Astra控制中心-[版本].tar.gz」） "NetApp 支援網站"。
2. 從下載Astra Control Center認證與金鑰的壓縮檔 "NetApp 支援網站"。
3. （可選）使用以下命令驗證套件的簽名：

```
openssl dgst -sha256 -verify astra-control-center[version].pub
-signature <astra-control-center[version].sig astra-control-
center[version].tar.gz
```

解壓縮套件並變更目錄

1. 擷取影像：

```
tar -vxzf astra-control-center-[version].tar.gz
```

2. 變更至Astra目錄。

```
cd astra-control-center-[version]
```

將映像新增至本機登錄

1. 將Astra Control Center映像目錄中的檔案新增至本機登錄。

請參閱以下自動載入影像的範例指令碼。

a. 登入您的登錄：

Docker：

```
docker login [your_registry_path]
```

Podcast：

```
podman login [your_registry_path]
```

b. 使用適當的指令碼來載入映像、標記映像、並[Subforte_image_local_register_pip]將映像推送到本機登錄：

Docker：

```
export REGISTRY=[Docker_registry_path]
for astraImageFile in $(ls images/*.tar) ; do
  # Load to local cache. And store the name of the loaded image
trimming the 'Loaded images: '
  astraImage=$(docker load --input ${astraImageFile} | sed 's/Loaded
image: //')
  astraImage=$(echo ${astraImage} | sed 's!localhost/!!')
  # Tag with local image repo.
  docker tag ${astraImage} ${REGISTRY}/${astraImage}
  # Push to the local repo.
  docker push ${REGISTRY}/${astraImage}
done
```

Podcast：

```
export REGISTRY=[Registry_path]
for astraImageFile in $(ls images/*.tar) ; do
  # Load to local cache. And store the name of the loaded image trimming
the 'Loaded images: '
  astraImage=$(podman load --input ${astraImageFile} | sed 's/Loaded
image(s): //')
  astraImage=$(echo ${astraImage} | sed 's!localhost/!!')
  # Tag with local image repo.
  podman tag ${astraImage} ${REGISTRY}/${astraImage}
  # Push to the local repo.
  podman push ${REGISTRY}/${astraImage}
done
```

設定具有驗證需求之登錄的命名空間和機密

1. 如果您使用需要驗證的登錄、則需要執行下列動作：

   a. 建立「NetApp-acc operator：

   ```
   kubectl create ns netapp-acc-operator
   ```

   回應：

   ```
   namespace/netapp-acc-operator created
   ```

   b. 建立「NetApp-acc operator」命名空間的秘密。新增Docker資訊並執行下列命令：

   ```
   kubectl create secret docker-registry astra-registry-cred -n netapp-
   acc-operator --docker-server=[your_registry_path] --docker
   -username=[username] --docker-password=[token]
   ```

   回應範例：

   ```
   secret/astra-registry-cred created
   ```

   c. 建立「NetApp-acc」（或自訂命名）命名空間。

   ```
   kubectl create ns [netapp-acc or custom namespace]
   ```

   回應範例：

```
namespace/netapp-acc created
```

d. 為「NetApp-acc」（或自訂命名）命名空間建立秘密。新增Docker資訊並執行下列命令：

```
kubectl create secret docker-registry astra-registry-cred -n [netapp-acc or custom namespace] --docker-server=[your_registry_path] --docker-username=[username] --docker-password=[token]
```

回應

```
secret/astra-registry-cred created
```

安裝Astra Control Center操作員

1. 編輯Astra Control Center營運者部署Yaml（「Astra _control_center_operer_deploy」、以參照您的本機登錄和機密。

```
vim astra_control_center_operator_deploy.yaml
```

a. 如果您使用需要驗證的登錄、請將預設行「imagePullSecrets：[]」改為：

```
imagePullSecrets:
- name: <name_of_secret_with_creds_to_local_registry>
```

b. 將「kube-RBAC代理」映像的「[your _register_path]」變更為您將映像推入的登錄路徑 上一步。

c. 將「acc oper-manager-manager」映像的「[your _register_path]」變更為您將映像推入的登錄路徑 上一步。

d. （若為使用Astra Data Store預覽的安裝）請參閱此已知問題 "儲存類別資源配置工具、以及您需要對Y反 洗錢進行的其他變更"。

```
apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    control-plane: controller-manager
  name: acc-operator-controller-manager
  namespace: netapp-acc-operator
spec:
  replicas: 1
  selector:
    matchLabels:
      control-plane: controller-manager
  template:
    metadata:
      labels:
        control-plane: controller-manager
    spec:
      containers:
      - args:
        - --secure-listen-address=0.0.0.0:8443
        - --upstream=http://127.0.0.1:8080/
        - --logtostderr=true
        - --v=10
        image: [your_registry_path]/kube-rbac-proxy:v4.8.0
        name: kube-rbac-proxy
        ports:
        - containerPort: 8443
          name: https
      - args:
        - --health-probe-bind-address=:8081
        - --metrics-bind-address=127.0.0.1:8080
        - --leader-elect
        command:
        - /manager
        env:
        - name: ACCOP_LOG_LEVEL
          value: "2"
        image: [your_registry_path]/acc-operator:[version x.y.z]
        imagePullPolicy: IfNotPresent
      imagePullSecrets: []
```

2. 安裝Astra Control Center操作員：

```
kubectl apply -f astra_control_center_operator_deploy.yaml
```

回應範例：

```
namespace/netapp-acc-operator created
customresourcedefinition.apiextensions.k8s.io/astracontrolcenters.astra.
netapp.io created
role.rbac.authorization.k8s.io/acc-operator-leader-election-role created
clusterrole.rbac.authorization.k8s.io/acc-operator-manager-role created
clusterrole.rbac.authorization.k8s.io/acc-operator-metrics-reader
created
clusterrole.rbac.authorization.k8s.io/acc-operator-proxy-role created
rolebinding.rbac.authorization.k8s.io/acc-operator-leader-election-
rolebinding created
clusterrolebinding.rbac.authorization.k8s.io/acc-operator-manager-
rolebinding created
clusterrolebinding.rbac.authorization.k8s.io/acc-operator-proxy-
rolebinding created
configmap/acc-operator-manager-config created
service/acc-operator-controller-manager-metrics-service created
deployment.apps/acc-operator-controller-manager created
```

設定Astra控制中心

1. 編輯Astra Control Center自訂資源（CR）檔案（「Astra_control_center_min.yaml」）、以建立帳戶、AutoSupport 供參考、登錄及其他必要的組態：

> 如果您的環境需要額外的自訂功能、您可以使用「Astra_control_center.yaml」作為替代的CR。「Astra_control_center_min.yaml」是預設的CR、適用於大部分的安裝。

```
vim astra_control_center_min.yaml
```

> 在初始Astra Control Center部署之後、無法變更由CR設定的內容。

> 如果您使用不需要授權的登錄、則必須刪除「imageRegistry」中的「秘密」行、否則安裝將會失敗。

a. 將「[your _register_path]（您的登錄路徑）」變更為您在上一個步驟中推送影像的登錄路徑。
b. 將「帳戶名稱」字串變更為您要與帳戶建立關聯的名稱。
c. 將「astraAddress」字串變更為您要在瀏覽器中用來存取Astra的FQDN。請勿在地址中使用「http：//」或「https：//」。複製此FQDN以供在中使用 後續步驟。
d. 將「電子郵件」字串變更為預設的初始系統管理員地址。複製此電子郵件地址以供在中使用 後續步驟。
e. 如果網站沒有網際網路連線、請將AutoSupport 「已註冊」改為「假」、否則連線網站則保留「真」。
f. （選用）新增與帳戶相關之使用者的名字「firstName」和姓氏「lastName」。您可以在UI中立即或稍後

執行此步驟。

g. （可選）如果安裝需要、請將「儲存類別」值變更為另一個Astra Trident StorageClass資源。

h. （若為使用Astra Data Store預覽的安裝）請參閱此已知問題 "其他必要變更" 至Yaml。

```
apiVersion: astra.netapp.io/v1
kind: AstraControlCenter
metadata:
  name: astra
spec:
  accountName: "Example"
  astraVersion: "ASTRA_VERSION"
  astraAddress: "astra.example.com"
  autoSupport:
    enrolled: true
  email: "[admin@example.com]"
  firstName: "SRE"
  lastName: "Admin"
  imageRegistry:
    name: "[your_registry_path]"
    secret: "astra-registry-cred"
  storageClass: "ontap-gold"
```

完整的Astra控制中心和操作員安裝

1. 如果您尚未在上一步中執行此操作、請建立「NetApp-acc」（或自訂）命名空間：

```
kubectl create ns [netapp-acc or custom namespace]
```

回應範例：

```
namespace/netapp-acc created
```

2. 在「NetApp-acc」（或您的自訂）命名空間中安裝Astra Control Center：

```
kubectl apply -f astra_control_center_min.yaml -n [netapp-acc or custom
namespace]
```

回應範例：

```
astracontrolcenter.astra.netapp.io/astra created
```

驗證系統狀態

如果您偏好使用OpenShift、您可以使用相似的相關命令來進行驗證步驟。

1. 驗證是否已成功安裝所有系統元件。

```
kubectl get pods -n [netapp-acc or custom namespace]
```

每個Pod的狀態應為「執行中」。部署系統Pod可能需要幾分鐘的時間。

回應範例：

```
NAME                                        READY   STATUS    RESTARTS
AGE
acc-helm-repo-5f75c5f564-bzqmt              1/1     Running   0
11m
activity-6b8f7cccb9-mlrn4                   1/1     Running   0
9m2s
api-token-authentication-6hznt              1/1     Running   0
8m50s
api-token-authentication-qpfgb              1/1     Running   0
8m50s
api-token-authentication-sqnb7              1/1     Running   0
8m50s
asup-5578bbdd57-dxkbp                       1/1     Running   0
9m3s
authentication-56bff4f95d-mspmq             1/1     Running   0
7m31s
bucketservice-6f7968b95d-9rrrl              1/1     Running   0
8m36s
cert-manager-5f6cf4bc4b-82khn               1/1     Running   0
6m19s
cert-manager-cainjector-76cf976458-sdrbc    1/1     Running   0
6m19s
cert-manager-webhook-5b7896bfd8-2n45j       1/1     Running   0
6m19s
cloud-extension-749d9f684c-8bdhq            1/1     Running   0
9m6s
cloud-insights-service-7d58687d9-h5tzw      1/1     Running   2
8m56s
composite-compute-968c79cb5-nv7l4           1/1     Running   0
9m11s
composite-volume-7687569985-jg9gg           1/1     Running   0
8m33s
credentials-5c9b75f4d6-nx9cz                1/1     Running   0
```

```
8m42s
entitlement-6c96fd8b78-zt7f8                1/1     Running   0
8m28s
features-5f7bfc9f68-gsjnl                   1/1     Running   0
8m57s
fluent-bit-ds-h88p7                         1/1     Running   0
7m22s
fluent-bit-ds-krhnj                         1/1     Running   0
7m23s
fluent-bit-ds-l5bjj                         1/1     Running   0
7m22s
fluent-bit-ds-lrclb                         1/1     Running   0
7m23s
fluent-bit-ds-s5t4n                         1/1     Running   0
7m23s
fluent-bit-ds-zpr6v                         1/1     Running   0
7m22s
graphql-server-5f5976f4bd-vbb4z             1/1     Running   0
7m13s
identity-56f78b8f9f-8h9p9                   1/1     Running   0
8m29s
influxdb2-0                                 1/1     Running   0
11m
krakend-6f8d995b4d-5khkl                    1/1     Running   0
7m7s
license-5b5db87c97-jmxzc                    1/1     Running   0
9m
login-ui-57b57c74b8-6xtv7                   1/1     Running   0
7m10s
loki-0                                      1/1     Running   0
11m
monitoring-operator-9dbc9c76d-8znck         2/2     Running   0
7m33s
nats-0                                      1/1     Running   0
11m
nats-1                                      1/1     Running   0
10m
nats-2                                      1/1     Running   0
10m
nautilus-6b9d88bc86-h8kfb                   1/1     Running   0
8m6s
nautilus-6b9d88bc86-vn68r                   1/1     Running   0
8m35s
openapi-b87d77dd8-5dz9h                     1/1     Running   0
9m7s
polaris-consul-consul-5ljfb                 1/1     Running   0
```

```
11m
polaris-consul-consul-s5d5z                1/1     Running   0
11m
polaris-consul-consul-server-0             1/1     Running   0
11m
polaris-consul-consul-server-1             1/1     Running   0
11m
polaris-consul-consul-server-2             1/1     Running   0
11m
polaris-consul-consul-twmpq                1/1     Running   0
11m
polaris-mongodb-0                          2/2     Running   0
11m
polaris-mongodb-1                          2/2     Running   0
10m
polaris-mongodb-2                          2/2     Running   0
10m
polaris-ui-84dc87847f-zrg8w                1/1     Running   0
7m12s
polaris-vault-0                            1/1     Running   0
11m
polaris-vault-1                            1/1     Running   0
11m
polaris-vault-2                            1/1     Running   0
11m
public-metrics-657698b66f-67pgt            1/1     Running   0
8m47s
storage-backend-metrics-6848b9fd87-w7x8r   1/1     Running   0
8m39s
storage-provider-5ff5868cd5-r9hj7          1/1     Running   0
8m45s
telegraf-ds-dw4hg                          1/1     Running   0
7m23s
telegraf-ds-k92gn                          1/1     Running   0
7m23s
telegraf-ds-mmxjl                          1/1     Running   0
7m23s
telegraf-ds-nhs8s                          1/1     Running   0
7m23s
telegraf-ds-rj7lw                          1/1     Running   0
7m23s
telegraf-ds-tqrkb                          1/1     Running   0
7m23s
telegraf-rs-9mwgj                          1/1     Running   0
7m23s
telemetry-service-56c49d689b-ffrzx         1/1     Running   0
```

```
8m42s
tenancy-767c77fb9d-g9ctv                    1/1     Running   0
8m52s
traefik-5857d87f85-7pmx8                    1/1     Running   0
6m49s
traefik-5857d87f85-cpxgv                    1/1     Running   0
5m34s
traefik-5857d87f85-lvmlb                    1/1     Running   0
4m33s
traefik-5857d87f85-t2xlk                    1/1     Running   0
4m33s
traefik-5857d87f85-v9wpf                    1/1     Running   0
7m3s
trident-svc-595f84dd78-zb8l6                1/1     Running   0
8m54s
vault-controller-86c94fbf4f-krttq           1/1     Running   0
9m24s
```

2. （選用）若要確保安裝完成、您可以使用下列命令來查看「acc operator」記錄。

```
kubectl logs deploy/acc-operator-controller-manager -n netapp-acc-
operator -c manager -f
```

3. 當所有Pod都在執行時、請擷取由Astra Control Center營運者安裝的「適用鍵盤」執行個體、以驗證安裝是否成功。

```
kubectl get acc -o yaml -n [netapp-acc or custom namespace]
```

4. 請查看回應中的「tatus.deploymentState`」欄位、以取得「部署」值。如果部署失敗、則會改為顯示錯誤訊息。

> 您將在下一步中使用「uuid」。

```
name: astra
   namespace: netapp-acc
   resourceVersion: "104424560"
   selfLink: /apis/astra.netapp.io/v1/namespaces/netapp-
acc/astracontrolcenters/astra
   uid: 9aa5fdae-4214-4cb7-9976-5d8b4c0ce27f
 spec:
   accountName: Example
   astraAddress: astra.example.com
   astraVersion: 21.12.60
```

```
    autoSupport:
      enrolled: true
      url: https://support.netapp.com/asupprod/post/1.0/postAsup
    crds: {}
    email: admin@example.com
    firstName: SRE
    imageRegistry:
      name: registry_name/astra
      secret: astra-registry-cred
    lastName: Admin
  status:
    accConditionHistory:
      items:
      - astraVersion: 21.12.60
        condition:
          lastTransitionTime: "2021-11-23T02:23:59Z"
          message: Deploying is currently in progress.
          reason: InProgress
          status: "False"
          type: Ready
        generation: 2
        observedSpec:
          accountName: Example
          astraAddress: astra.example.com
          astraVersion: 21.12.60
          autoSupport:
            enrolled: true
            url: https://support.netapp.com/asupprod/post/1.0/postAsup
          crds: {}
          email: admin@example.com
          firstName: SRE
          imageRegistry:
            name: registry_name/astra
            secret: astra-registry-cred
          lastName: Admin
        timestamp: "2021-11-23T02:23:59Z"
      - astraVersion: 21.12.60
        condition:
          lastTransitionTime: "2021-11-23T02:23:59Z"
          message: Deploying is currently in progress.
          reason: InProgress
          status: "True"
          type: Deploying
        generation: 2
        observedSpec:
          accountName: Example
```

```
        astraAddress: astra.example.com
        astraVersion: 21.12.60
        autoSupport:
          enrolled: true
          url: https://support.netapp.com/asupprod/post/1.0/postAsup
        crds: {}
        email: admin@example.com
        firstName: SRE
        imageRegistry:
          name: registry_name/astra
          secret: astra-registry-cred
        lastName: Admin
      timestamp: "2021-11-23T02:23:59Z"
    - astraVersion: 21.12.60
      condition:
        lastTransitionTime: "2021-11-23T02:29:41Z"
        message: Post Install was successful
        observedGeneration: 2
        reason: Complete
        status: "True"
        type: PostInstallComplete
      generation: 2
      observedSpec:
        accountName: Example
        astraAddress: astra.example.com
        astraVersion: 21.12.60
        autoSupport:
          enrolled: true
          url: https://support.netapp.com/asupprod/post/1.0/postAsup
        crds: {}
        email: admin@example.com
        firstName: SRE
        imageRegistry:
          name: registry_name/astra
          secret: astra-registry-cred
        lastName: Admin
      timestamp: "2021-11-23T02:29:41Z"
    - astraVersion: 21.12.60
      condition:
        lastTransitionTime: "2021-11-23T02:29:41Z"
        message: Deploying succeeded.
        reason: Complete
        status: "False"
        type: Deploying
      generation: 2
      observedGeneration: 2
```

```
      observedSpec:
        accountName: Example
        astraAddress: astra.example.com
        astraVersion: 21.12.60
        autoSupport:
          enrolled: true
          url: https://support.netapp.com/asupprod/post/1.0/postAsup
        crds: {}
        email: admin@example.com
        firstName: SRE
        imageRegistry:
          name: registry_name/astra
          secret: astra-registry-cred
        lastName: Admin
      observedVersion: 21.12.60
      timestamp: "2021-11-23T02:29:41Z"
    - astraVersion: 21.12.60
      condition:
        lastTransitionTime: "2021-11-23T02:29:41Z"
        message: Astra is deployed
        reason: Complete
        status: "True"
        type: Deployed
      generation: 2
      observedGeneration: 2
      observedSpec:
        accountName: Example
        astraAddress: astra.example.com
        astraVersion: 21.12.60
        autoSupport:
          enrolled: true
          url: https://support.netapp.com/asupprod/post/1.0/postAsup
        crds: {}
        email: admin@example.com
        firstName: SRE
        imageRegistry:
          name: registry_name/astra
          secret: astra-registry-cred
        lastName: Admin
      observedVersion: 21.12.60
      timestamp: "2021-11-23T02:29:41Z"
    - astraVersion: 21.12.60
      condition:
        lastTransitionTime: "2021-11-23T02:29:41Z"
        message: Astra is deployed
        reason: Complete
```

```
        status: "True"
        type: Ready
      generation: 2
      observedGeneration: 2
      observedSpec:
        accountName: Example
        astraAddress: astra.example.com
        astraVersion: 21.12.60
        autoSupport:
          enrolled: true
          url: https://support.netapp.com/asupprod/post/1.0/postAsup
        crds: {}
        email: admin@example.com
        firstName: SRE
        imageRegistry:
          name: registry_name/astra
          secret: astra-registry-cred
        lastName: Admin
      observedVersion: 21.12.60
      timestamp: "2021-11-23T02:29:41Z"
  certManager: deploy
  cluster:
    type: OCP
    vendorVersion: 4.7.5
    version: v1.20.0+bafe72f
  conditions:
  - lastTransitionTime: "2021-12-08T16:19:55Z"
    message: Astra is deployed
    reason: Complete
    status: "True"
    type: Ready
  - lastTransitionTime: "2021-12-08T16:19:55Z"
    message: Deploying succeeded.
    reason: Complete
    status: "False"
    type: Deploying
  - lastTransitionTime: "2021-12-08T16:19:53Z"
    message: Post Install was successful
    observedGeneration: 2
    reason: Complete
    status: "True"
    type: PostInstallComplete
  - lastTransitionTime: "2021-12-08T16:19:55Z"
    message: Astra is deployed
    reason: Complete
    status: "True"
```

```
      type: Deployed
    deploymentState: Deployed
    observedGeneration: 2
    observedSpec:
      accountName: Example
      astraAddress: astra.example.com
      astraVersion: 21.12.60
      autoSupport:
        enrolled: true
        url: https://support.netapp.com/asupprod/post/1.0/postAsup
      crds: {}
      email: admin@example.com
      firstName: SRE
      imageRegistry:
        name: registry_name/astra
        secret: astra-registry-cred
      lastName: Admin
    observedVersion: 21.12.60
    postInstall: Complete
    uuid: 9aa5fdae-4214-4cb7-9976-5d8b4c0ce27f
kind: List
metadata:
 resourceVersion: ""
 selfLink: ""
```

5. 若要取得登入Astra Control Center時使用的一次性密碼、請從上一步的回應中複製「stats.uuid」值。密碼為「ACC-」、後面接著UUID值（「ACC-[UUUID]」、或在本範例中為「ACC-c49008a5-4ef1-4c5d-a53e-830daf9941116」）。

登入Astra Control Center UI

安裝Astra Control Center之後、您將變更預設管理員的密碼、並登入Astra Control Center UI儀表板。

步驟

1. 在瀏覽器中、輸入您在「Astra Address」（astrAddress）中使用的FQDN、位於「Astra控制中心_min.yaml」（當）字段中 您安裝了Astra Control Center。
2. 出現提示時、請接受自我簽署的憑證。

   您可以在登入後建立自訂憑證。

3. 在Astra Control Center登入頁面中、輸入您在「Astra Control Center_min.yaml」CR中使用的「電子郵件」值 您安裝了Astra Control Center，然後是一次性密碼（「ACC-[UUUID]」）。

   如果您輸入錯誤密碼三次、系統將鎖定管理員帳戶15分鐘。

4. 選擇*登入*。

5. 出現提示時變更密碼。

> 如果這是您第一次登入、但您忘記密碼、而且尚未建立其他管理使用者帳戶、請聯絡NetApp支援部門以取得密碼恢復協助。

6. （選用）移除現有的自我簽署TLS憑證、並以取代 "由憑證授權單位（CA）簽署的自訂TLS憑證"。

疑難排解安裝

如果有任何服務處於「錯誤」狀態、您可以檢查記錄。尋找400到500範圍內的API回應代碼。這些都表示發生故障的地點。

步驟

1. 若要檢查Astra控制中心的操作員記錄、請輸入下列內容：

```
kubectl logs --follow -n netapp-acc-operator $(kubectl get pods -n
netapp-acc-operator -o name)  -c manager
```

下一步

執行以完成部署 "設定工作"。

使用OpenShift作業系統集線器安裝Astra Control Center

如果您使用Red Hat OpenShift、可以使用Red Hat認證的操作員來安裝Astra Control Center。請使用此程序從安裝Astra Control Center "Red Hat生態系統目錄" 或使用Red Hat OpenShift Container Platform。

完成此程序之後、您必須返回安裝程序、才能完成 "剩餘步驟" 以驗證安裝是否成功並登入。

您需要的是 **#8217** ；需要的是什麼

- "開始安裝之前、請先準備好環境以進行Astra Control Center部署"。
- 從OpenShift叢集、確保所有叢集操作員都處於正常狀態（「Available」（可用）為「true」（真））：

```
oc get clusteroperators
```

- 從OpenShift叢集、確保所有API服務都處於健全狀態（「Available」（可用）為「true」）：

```
oc get apiservices
```

- 您已在資料中心建立Astra Control Center的FQDN位址。
- 您有必要的權限和存取權、可以存取Red Hat OpenShift Container Platform來執行所述的安裝步驟。

步驟

- [Download the Astra Control Center bundle]
- [Unpack the bundle and change directory]
- [Add the images to your local registry]
- [Find the operator install page]
- [Install the operator]
- [Install Astra Control Center]

下載Astra Control Center套裝組合

1. 請從下載Astra Control Center套裝組合（「Astra控制中心-[版本].tar.gz」） "NetApp 支援網站"。
2. 請從下載Astra Control Center認證與金鑰的壓縮檔 "NetApp 支援網站"。
3. （可選）使用以下命令驗證套件的簽名：

```
openssl dgst -sha256 -verify astra-control-center[version].pub
-signature <astra-control-center[version].sig astra-control-
center[version].tar.gz
```

解壓縮套件並變更目錄

1. 擷取影像：

```
tar -vxzf astra-control-center-[version].tar.gz
```

2. 變更至Astra目錄。

```
cd astra-control-center-[version]
```

將映像新增至本機登錄

1. 將Astra Control Center映像目錄中的檔案新增至本機登錄。

   請參閱以下自動載入影像的範例指令碼。

   a. 登入您的登錄：

      Docker：

```
docker login [your_registry_path]
```

      Podcast：

```
podman login [your_registry_path]
```

b. 使用適當的指令碼來載入映像、標記映像、並[Subforte_image_local_register_pip]將映像推送到本機登錄：

Docker：

```
export REGISTRY=[Docker_registry_path]
for astraImageFile in $(ls images/*.tar) ; do
  # Load to local cache. And store the name of the loaded image
trimming the 'Loaded images: '
  astraImage=$(docker load --input ${astraImageFile} | sed 's/Loaded
image: //')
  astraImage=$(echo ${astraImage} | sed 's!localhost/!!')
  # Tag with local image repo.
  docker tag ${astraImage} ${REGISTRY}/${astraImage}
  # Push to the local repo.
  docker push ${REGISTRY}/${astraImage}
done
```

Podcast：

```
export REGISTRY=[Registry_path]
for astraImageFile in $(ls images/*.tar) ; do
  # Load to local cache. And store the name of the loaded image trimming
the 'Loaded images: '
  astraImage=$(podman load --input ${astraImageFile} | sed 's/Loaded
image(s): //')
  astraImage=$(echo ${astraImage} | sed 's!localhost/!!')
  # Tag with local image repo.
  podman tag ${astraImage} ${REGISTRY}/${astraImage}
  # Push to the local repo.
  podman push ${REGISTRY}/${astraImage}
done
```

尋找操作員安裝頁面

1. 請完成下列其中一個程序、以存取操作員安裝頁面：
   - 從Red Hat Openshift Web主控台

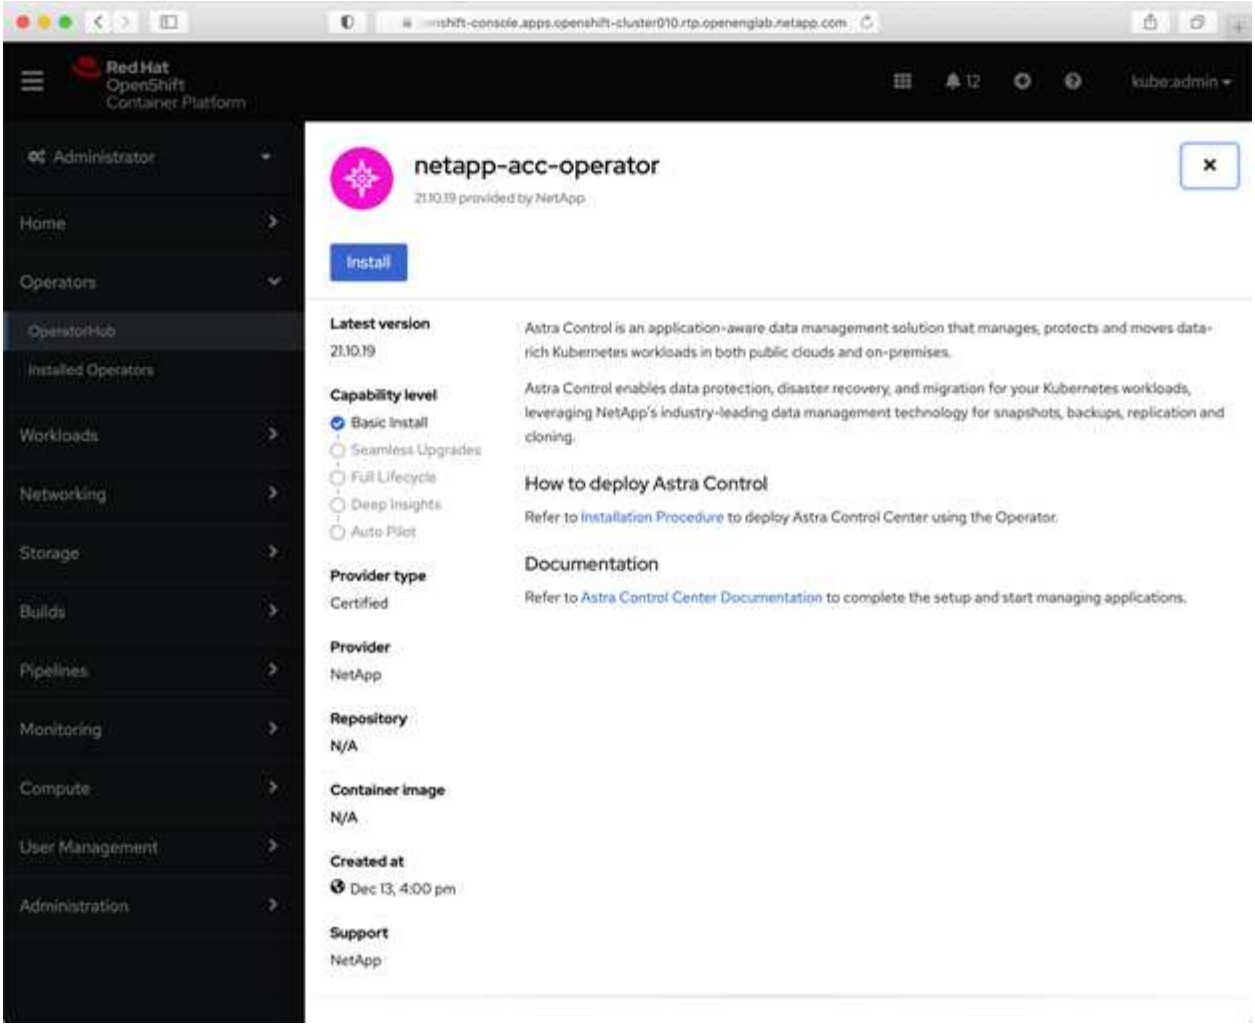

：

i. 登入OpenShift Container Platform UI。

ii. 從側功能表中、選取*運算子>運算子中樞*。

iii. 選擇NetApp Astra Control Center營運者。

iv. 選擇*安裝*。

。從Red Hat生態系統目錄

：

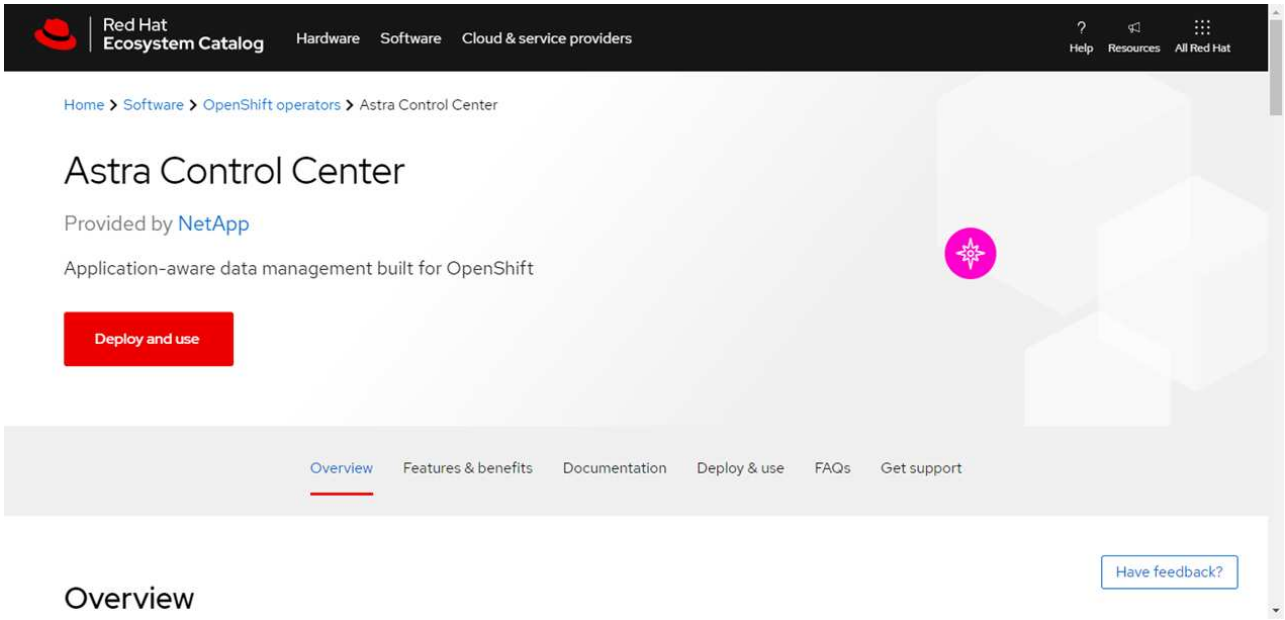

i. 選擇NetApp Astra Control Center "營運者"。

ii. 選擇*部署和使用*。

安裝操作員

1. 完成*安裝操作員*頁面並安裝操作員：

   此運算子可用於所有叢集命名空間。

   a. 在操作員安裝過程中、系統會自動建立運算子命名空間或「NetApp-acc operator」命名空間。

   b. 選取手動或自動核准策略。

      建議手動核准。每個叢集只能執行單一運算子執行個體。

   c. 選擇*安裝*。

      如果您選擇手動核准策略、系統會提示您核准此操作員的手動安裝計畫。

2. 從主控台移至「作業系統集線器」功能表、確認操作員已成功安裝。

安裝Astra Control Center

1. 在Astra Control Center操作員的詳細資料檢視中、從主控台選取所提供API區段中的「Create instance（建立執行個體）」。

2. 填寫「Create適用的」表單欄位：

   a. 保留或調整Astra Control Center名稱。

   b. （選用）啟用或停用自動支援。建議保留「自動支援」功能。

   c. 輸入Astra Control Center位址。請勿在地址中輸入「http：//」或「https：//」。

d. 輸入Astra Control Center版本、例如21.12.60。
e. 輸入帳戶名稱、電子郵件地址和管理員姓氏。
f. 保留預設的Volume回收原則。
g. 在*映像登錄*中、輸入您的本機容器映像登錄路徑。請勿在地址中輸入「http：//」或「https：//」。
h. 如果您使用需要驗證的登錄、請輸入密碼。
i. 輸入管理員名字。
j. 設定資源擴充。
k. 保留預設的儲存類別。
l. 定義客戶需求日處理偏好設定。

3. 選取「Create」（建立）。

下一步

確認Astra Control Center安裝成功、然後完成 "剩餘步驟" 以登入。此外、您也可以執行來完成部署 "設定工作"。

版權資訊

Copyright©2022 NetApp、Inc.版權所有。美國印製本文件中版權所涵蓋的任何部分、不得以任何形式或任何方式（包括影印、錄製、 在未事先取得版權擁有者書面許可的情況下、在電子擷取系統中進行錄音或儲存。

衍生自受版權保護之NetApp資料的軟體必須遵守下列授權與免責聲明：

本軟體係由NetApp「依現狀」提供、不含任何明示或暗示的保證、包括但不限於適售性及特定用途適用性的暗示保證、特此聲明。在任何情況下、NetApp均不對任何直接、間接、偶發、特殊、示範、 或衍生性損害（包括但不限於採購替代商品或服務；使用損失、資料或利潤損失； 或業務中斷）、無論是在合約、嚴格責任或侵權行為（包括疏忽或其他）中、無論是因使用本軟體而產生的任何責任理論（包括疏忽或其他）、即使已被告知可能造成此類損害。

NetApp保留隨時變更本文所述之任何產品的權利、恕不另行通知。除非NetApp以書面明確同意、否則NetApp不承擔因使用本文所述產品而產生的任何責任或責任。使用或購買本產品並不代表NetApp擁有任何專利權利、商標權利或任何其他智慧財產權。

本手冊所述產品可能受到一或多個美國國家/地區的保護專利、國外專利或申請中。

限制權利圖例：政府使用、複製或揭露受DFARS 252.277-7103（1988年10月）和FAR 52-227-19（1987年6月）技術資料與電腦軟體權利條款（c）（1）（ii）分段所述限制。

商標資訊

NetApp、NetApp標誌及所列的標章 http://www.netapp.com/TM 為NetApp、Inc.的商標。其他公司和產品名稱可能為其各自所有者的商標。