



Installation overview

Astra Control Center

NetApp

February 12, 2024

This PDF was generated from https://docs.netapp.com/us-en/astra-control-center-2208/get-started/acc_cluster_cr_options.html on February 12, 2024. Always check docs.netapp.com for the latest.

Table of Contents

- Installation overview 1
 - Install Astra Control Center using the standard process 1
 - Install Astra Control Center using OpenShift OperatorHub 27
 - Install Astra Control Center with a Cloud Volumes ONTAP storage backend 34

Installation overview

Choose and complete one of the following Astra Control Center installation procedures:

- [Install Astra Control Center using the standard process](#)
- (If you use Red Hat OpenShift) [Install Astra Control Center using OpenShift OperatorHub](#)
- [Install Astra Control Center with a Cloud Volumes ONTAP storage backend](#)

Install Astra Control Center using the standard process

To install Astra Control Center, download the installation bundle from the NetApp Support Site and perform the following steps to install Astra Control Center Operator and Astra Control Center in your environment. You can use this procedure to install Astra Control Center in internet-connected or air-gapped environments.

For Red Hat OpenShift environments, you can use an [alternative procedure](#) to install Astra Control Center using OpenShift OperatorHub.

What you'll need

- [Before you begin installation, prepare your environment for Astra Control Center deployment.](#)
- If you have configured or want to configure pod security policies in your environment, familiarize yourself with pod security policies and how they affect Astra Control Center installation. See [Understand pod security policy restrictions](#).
- Ensure all cluster operators are in a healthy state and available.

```
kubectl get clusteroperators
```

- Ensure all API services are in a healthy state and available:

```
kubectl get apiservices
```

- Ensure the Astra FQDN you plan to use is routable to this cluster. This means that you either have a DNS entry in your internal DNS server or you are using a core URL route that is already registered.
- If a cert-manager already exists in the cluster, you need to perform some [prerequisite steps](#) so that Astra Control Center does not install its own cert-manager.

About this task

The Astra Control Center installation process does the following:

- Installs the Astra components into the `netapp-acc` (or custom-named) namespace.
- Creates a default account.
- Establishes a default administrative user email address and default one-time password. This user is assigned the Owner role in the system that is needed for first time login to the UI.
- Helps you determine that all Astra Control Center pods are running.
- Installs the Astra UI.



(Applies to the Astra Data Store Early Access Program (EAP) release only) If you intend to manage Astra Data Store using Astra Control Center and enable VMware workflows, deploy Astra Control Center only on the `pcloud` namespace and not on the `netapp-acc` namespace or a custom namespace described in the steps of this procedure.



Do not execute the following command during the entirety of the installation process to avoid deleting all Astra Control Center pods: `kubectl delete -f astra_control_center_operator_deploy.yaml`



If you are using Red Hat's Podman instead of Docker Engine, Podman commands can be used in place of Docker commands.

Steps

To install Astra Control Center, do the following steps:

- [Download and unpack the Astra Control Center bundle](#)
- [Install the NetApp Astra kubectl plugin](#)
- [Add the images to your local registry](#)
- [Set up namespace and secret for registries with auth requirements](#)
- [Install the Astra Control Center operator](#)
- [Configure Astra Control Center](#)
- [Complete Astra Control Center and operator installation](#)
- [Verify system status](#)
- [Set up ingress for load balancing](#)
- [Log in to the Astra Control Center UI](#)

Download and unpack the Astra Control Center bundle

1. Download the Astra Control Center bundle (`astra-control-center-[version].tar.gz`) from the [NetApp Support Site](#).
2. Download the zip of Astra Control Center certificates and keys from the [NetApp Support Site](#).
3. (Optional) Use the following command to verify the signature of the bundle:

```
openssl dgst -sha256 -verify AstraControlCenter-public.pub -signature  
astra-control-center-[version].tar.gz.sig astra-control-center-  
[version].tar.gz
```

4. Extract the images:

```
tar -vxzf astra-control-center-[version].tar.gz
```

Install the NetApp Astra kubectl plugin

The NetApp Astra `kubectl` command line plugin saves time when performing common tasks associated with deploying and upgrading Astra Control Center.

What you'll need

NetApp provides binaries for the plugin for different CPU architectures and operating systems. You need to know which CPU and operating system you have before you perform this task. On Linux and Mac operating systems, you can use the `uname -a` command to gather this information.

Steps

1. List the available NetApp Astra `kubectl` plugin binaries, and note the name of the file you need for your operating system and CPU architecture:

```
ls kubectl-astra/
```

2. Copy the file to the same location as the standard `kubectl` utility. In this example, the `kubectl` utility is located in the `/usr/local/bin` directory. Replace `<binary-name>` with the name of the file you need:

```
cp kubectl-astra/<binary-name> /usr/local/bin/kubectl-astra
```

Add the images to your local registry

1. Complete the appropriate step sequence for your container engine:

Docker

1. Change to the Astra directory:

```
cd acc
```

2. Push the package images in the Astra Control Center image directory to your local registry. Make the following substitutions before running the command:

- Replace BUNDLE_FILE with the name of the Astra Control bundle file (for example, acc.manifest.yaml).
- Replace MY_REGISTRY with the URL of the Docker repository.
- Replace MY_REGISTRY_USER with the user name.
- Replace MY_REGISTRY_TOKEN with an authorized token for the registry.

```
kubectl astra packages push-images -m BUNDLE_FILE -r MY_REGISTRY  
-u MY_REGISTRY_USER -p MY_REGISTRY_TOKEN
```

Podman

1. Log in to your registry:

```
podman login [your_registry_path]
```

2. Run the following script, making the <YOUR_REGISTRY> substitution as noted in the comments:

```
# You need to be at the root of the tarball.
# You should see these files to confirm correct location:
#   acc.manifest.yaml
#   acc/

# Replace <YOUR_REGISTRY> with your own registry (e.g
registry.customer.com or registry.customer.com/testing, etc..)
export REGISTRY=<YOUR_REGISTRY>
export PACKAGENAME=acc
export PACKAGEVERSION=22.08.1-26
export DIRECTORYNAME=acc
for astraImageFile in $(ls ${DIRECTORYNAME}/images/*.tar) ; do
    # Load to local cache
    astraImage=$(podman load --input ${astraImageFile} | sed 's/Loaded
image(s): //'')

    # Remove path and keep imageName.
    astraImageNoPath=$(echo ${astraImage} | sed 's:.*/:::')

    # Tag with local image repo.
    podman tag ${astraImage} ${REGISTRY}/netapp/astra/${PACKAGENAME}
/${PACKAGEVERSION}/${astraImageNoPath}

    # Push to the local repo.
    podman push ${REGISTRY}/netapp/astra/${PACKAGENAME}/
${PACKAGEVERSION}/${astraImageNoPath}
done
```

Set up namespace and secret for registries with auth requirements

1. Export the KUBECONFIG for the Astra Control Center host cluster:

```
export KUBECONFIG=[file path]
```

2. If you use a registry that requires authentication, you need to do the following:

- a. Create the netapp-acc-operator namespace:

```
kubectl create ns netapp-acc-operator
```

Response:

```
namespace/netapp-acc-operator created
```

- b. Create a secret for the netapp-acc-operator namespace. Add Docker information and run the following command:



The placeholder `your_registry_path` should match the location of the images that you uploaded earlier (for example, `[Registry_URL]/netapp/astra/astracc/22.08.1-26`).

```
kubectl create secret docker-registry astra-registry-cred -n netapp-acc-operator --docker-server=[your_registry_path] --docker-username=[username] --docker-password=[token]
```

Sample response:

```
secret/astra-registry-cred created
```



If you delete the namespace after the secret is generated, you need to regenerate the secret for the namespace after the namespace is recreated.

- c. Create the netapp-acc (or custom named) namespace.

```
kubectl create ns [netapp-acc or custom namespace]
```

Sample response:

```
namespace/netapp-acc created
```

- d. Create a secret for the netapp-acc (or custom named) namespace. Add Docker information and run the following command:

```
kubectl create secret docker-registry astra-registry-cred -n [netapp-acc or custom namespace] --docker-server=[your_registry_path] --docker-username=[username] --docker-password=[token]
```

Response

```
secret/astra-registry-cred created
```

- e. (Optional) If you want the cluster to be automatically managed by Astra Control Center after

installation, make sure that you provide the kubeconfig as a secret within the Astra Control Center namespace you intend to deploy into using this command:

```
kubectl create secret generic [acc-kubeconfig-cred or custom secret name] --from-file=<path-to-your-kubeconfig> -n [netapp-acc or custom namespace]
```

Install the Astra Control Center operator

1. Change the directory:

```
cd manifests
```

2. Edit the Astra Control Center operator deployment YAML (`astra_control_center_operator_deploy.yaml`) to refer to your local registry and secret.

```
vim astra_control_center_operator_deploy.yaml
```



An annotated sample YAML follows these steps.

- a. If you use a registry that requires authentication, replace the default line of `imagePullSecrets: []` with the following:

```
imagePullSecrets:
- name: <astra-registry-cred>
```

- b. Change `[your_registry_path]` for the `kube-rbac-proxy` image to the registry path where you pushed the images in a [previous step](#).
- c. Change `[your_registry_path]` for the `acc-operator-controller-manager` image to the registry path where you pushed the images in a [previous step](#).
- d. (For installations using Astra Data Store preview) See this known issue regarding [storage class provisioners and additional changes you will need to make to the YAML](#).

```

apiVersion: apps/v1
kind: Deployment
metadata:
  labels:
    control-plane: controller-manager
    name: acc-operator-controller-manager
    namespace: netapp-acc-operator
spec:
  replicas: 1
  selector:
    matchLabels:
      control-plane: controller-manager
  template:
    metadata:
      labels:
        control-plane: controller-manager
    spec:
      containers:
        - args:
            - --secure-listen-address=0.0.0.0:8443
            - --upstream=http://127.0.0.1:8080/
            - --logtostderr=true
            - --v=10
            image: [your_registry_path]/kube-rbac-proxy:v4.8.0
          name: kube-rbac-proxy
          ports:
            - containerPort: 8443
              name: https
        - args:
            - --health-probe-bind-address=:8081
            - --metrics-bind-address=127.0.0.1:8080
            - --leader-elect
          command:
            - /manager
          env:
            - name: ACCOP_LOG_LEVEL
              value: "2"
            image: [your_registry_path]/acc-operator:[version x.y.z]
          imagePullPolicy: IfNotPresent
      imagePullSecrets: []

```

3. Install the Astra Control Center operator:

```
kubectl apply -f astra_control_center_operator_deploy.yaml
```

Sample response:

```
namespace/netapp-acc-operator created
customresourcedefinition.apiextensions.k8s.io/astracontrolcenters.astra.
netapp.io created
role.rbac.authorization.k8s.io/acc-operator-leader-election-role created
clusterrole.rbac.authorization.k8s.io/acc-operator-manager-role created
clusterrole.rbac.authorization.k8s.io/acc-operator-metrics-reader
created
clusterrole.rbac.authorization.k8s.io/acc-operator-proxy-role created
rolebinding.rbac.authorization.k8s.io/acc-operator-leader-election-
rolebinding created
clusterrolebinding.rbac.authorization.k8s.io/acc-operator-manager-
rolebinding created
clusterrolebinding.rbac.authorization.k8s.io/acc-operator-proxy-
rolebinding created
configmap/acc-operator-manager-config created
service/acc-operator-controller-manager-metrics-service created
deployment.apps/acc-operator-controller-manager created
```

4. Verify pods are running:

```
kubectl get pods -n netapp-acc-operator
```

Configure Astra Control Center

1. Edit the Astra Control Center custom resource (CR) file (`astra_control_center_min.yaml`) to make account, autoSupport, registry, and other necessary configurations:



`astra_control_center_min.yaml` is the default CR and is suitable for most installations. Familiarize yourself with all [CR options and their potential values](#) to ensure you deploy Astra Control Center correctly for your environment. If additional customizations are required for your environment, you can use `astra_control_center.yaml` as an alternative CR.

```
vim astra_control_center_min.yaml
```



If you are using a registry that does not require authorization, you must delete the `secret` line within `imageRegistry` or the installation will fail.

- a. Change `[your_registry_path]` to the registry path where you pushed the images in the previous step.
- b. Change the `accountName` string to the name you want to associate with the account.

- c. Change the `astraAddress` string to the FQDN you want to use in your browser to access Astra. Do not use `http://` or `https://` in the address. Copy this FQDN for use in a [later step](#).
- d. Change the `email` string to the default initial administrator address. Copy this email address for use in a [later step](#).
- e. Change `enrolled for AutoSupport` to `false` for sites without internet connectivity or retain `true` for connected sites.
- f. If you use an external cert-manager, add the following lines to `spec`:

```
spec:
  crds:
    externalCertManager: true
```

- g. (Optional) Add a first name `firstName` and last name `lastName` of the user associated with the account. You can perform this step now or later within the UI.
- h. (Optional) Change the `storageClass` value to another Trident `storageClass` resource if required by your installation.
- i. (Optional) If you want the cluster to be automatically managed by Astra Control Center after installation and you have already [created the secret containing the kubeconfig for this cluster](#), provide the name of the secret by adding a new field to this YAML file called `astraKubeConfigSecret`: `"acc-kubeconfig-cred` or `custom secret name"`
- j. Complete one of the following steps:

- **Other ingress controller (`ingressType:Generic`):** This is the default action with Astra Control Center. After Astra Control Center is deployed, you will need to configure the ingress controller to expose Astra Control Center with a URL.

The default Astra Control Center installation sets up its gateway (`service/traefik`) to be of the type `ClusterIP`. This default installation requires you to additionally set up a Kubernetes IngressController/Ingress to route traffic to it. If you want to use an ingress, see [Set up ingress for load balancing](#).

- **Service load balancer (`ingressType:AccTraefik`):** If you don't want to install an IngressController or create an Ingress resource, set `ingressType` to `AccTraefik`.

This deploys the Astra Control Center `traefik` gateway as a Kubernetes LoadBalancer type service.

Astra Control Center uses a service of the type "LoadBalancer" (`svc/traefik` in the Astra Control Center namespace), and requires that it be assigned an accessible external IP address. If load balancers are permitted in your environment and you don't already have one configured, you can use MetalLB or another external service load balancer to assign an external IP address to the service. In the internal DNS server configuration, you should point the chosen DNS name for Astra Control Center to the load-balanced IP address.



For details about the service type of "LoadBalancer" and ingress, see [Requirements](#).

```

apiVersion: astra.netapp.io/v1
kind: AstraControlCenter
metadata:
  name: astra
spec:
  accountName: "Example"
  astraVersion: "ASTRA_VERSION"
  astraAddress: "astra.example.com"
  astraKubeConfigSecret: "acc-kubeconfig-cred or custom secret name"
  ingressType: "Generic"
  autoSupport:
    enrolled: true
  email: "[admin@example.com]"
  firstName: "SRE"
  lastName: "Admin"
  imageRegistry:
    name: "[your_registry_path]"
    secret: "astra-registry-cred"
  storageClass: "ontap-gold"

```

Complete Astra Control Center and operator installation

1. If you didn't already do so in a previous step, create the `netapp-acc` (or custom) namespace:

```
kubectl create ns [netapp-acc or custom namespace]
```

Sample response:

```
namespace/netapp-acc created
```

2. Install Astra Control Center in the `netapp-acc` (or your custom) namespace:

```
kubectl apply -f astra_control_center_min.yaml -n [netapp-acc or custom namespace]
```

Sample response:

```
astracontrolcenter.astra.netapp.io/astra created
```

Verify system status



If you prefer to use OpenShift, you can use comparable oc commands for verification steps.

1. Verify that all system components installed successfully.

```
kubectl get pods -n [netapp-acc or custom namespace]
```

Each pod should have a status of `Running`. It may take several minutes before the system pods are deployed.

Sample response

NAME	READY	STATUS	RESTARTS
AGE			
acc-helm-repo-6b44d68d94-d8m55 13m	1/1	Running	0
activity-78f99ddf8-hltct 10m	1/1	Running	0
api-token-authentication-457nl 9m28s	1/1	Running	0
api-token-authentication-dgwsz 9m28s	1/1	Running	0
api-token-authentication-hmqqc 9m28s	1/1	Running	0
asup-75fd554dc6-m6qzh 9m38s	1/1	Running	0
authentication-6779b4c85d-92gds 8m11s	1/1	Running	0
bucket-service-7cc767f8f8-lqwr8 9m31s	1/1	Running	0
certificates-549fd5d6cb-5kmd6 9m56s	1/1	Running	0
certificates-549fd5d6cb-bkjh9 9m56s	1/1	Running	0
cloud-extension-7bcb7948b-hn8h2 10m	1/1	Running	0
cloud-insights-service-56ccf86647-fgg69 9m46s	1/1	Running	0
composite-compute-677685b9bb-7vgsf 10m	1/1	Running	0
composite-volume-657d6c5585-dnq79 9m49s	1/1	Running	0
credentials-755fd867c8-vrlmt 11m	1/1	Running	0
entitlement-86495cdf5b-nwhh2 10m	1/1	Running	2
features-5684fb8b56-8d6s8 10m	1/1	Running	0
fluent-bit-ds-rhx7v 7m48s	1/1	Running	0
fluent-bit-ds-rjms4 7m48s	1/1	Running	0
fluent-bit-ds-zf5ph 7m48s	1/1	Running	0
graphql-server-66d895f544-w6hjd 3m29s	1/1	Running	0

identity-744df448d5-rlcmm	1/1	Running	0
10m			
influxdb2-0	1/1	Running	0
13m			
keycloak-operator-75c965cc54-z7csw	1/1	Running	0
8m16s			
krakend-798d6df96f-9z2sk	1/1	Running	0
3m26s			
license-5fb7d75765-f8mjg	1/1	Running	0
9m50s			
login-ui-7d5b7df85d-l2s7s	1/1	Running	0
3m20s			
loki-0	1/1	Running	0
13m			
metrics-facade-599b9d7fcc-gtmgl	1/1	Running	0
9m40s			
monitoring-operator-67cc74f844-cdplp	2/2	Running	0
8m11s			
nats-0	1/1	Running	0
13m			
nats-1	1/1	Running	0
13m			
nats-2	1/1	Running	0
12m			
nautilus-769f5b74cd-k5jxm	1/1	Running	0
9m42s			
nautilus-769f5b74cd-kd9gd	1/1	Running	0
8m59s			
openapi-84f6ccd8ff-76kvp	1/1	Running	0
9m34s			
packages-6f59fc67dc-4g2f5	1/1	Running	0
9m52s			
polaris-consul-consul-server-0	1/1	Running	0
13m			
polaris-consul-consul-server-1	1/1	Running	0
13m			
polaris-consul-consul-server-2	1/1	Running	0
13m			
polaris-keycloak-0	1/1	Running	0
8m7s			
polaris-keycloak-1	1/1	Running	0
5m49s			
polaris-keycloak-2	1/1	Running	0
5m15s			
polaris-keycloak-db-0	1/1	Running	0
8m6s			

polaris-keycloak-db-1	1/1	Running	0
5m49s			
polaris-keycloak-db-2	1/1	Running	0
4m57s			
polaris-mongodb-0	2/2	Running	0
13m			
polaris-mongodb-1	2/2	Running	0
12m			
polaris-mongodb-2	2/2	Running	0
12m			
polaris-ui-565f56bf7b-zwr8b	1/1	Running	0
3m19s			
polaris-vault-0	1/1	Running	0
13m			
polaris-vault-1	1/1	Running	0
13m			
polaris-vault-2	1/1	Running	0
13m			
public-metrics-6d86d66444-2wbz1	1/1	Running	0
9m30s			
storage-backend-metrics-77c5d98dcd-dbhg5	1/1	Running	0
9m44s			
storage-provider-78c885f57c-6zcv4	1/1	Running	0
9m36s			
telegraf-ds-212m9	1/1	Running	0
7m48s			
telegraf-ds-qfzgh	1/1	Running	0
7m48s			
telegraf-ds-shrms	1/1	Running	0
7m48s			
telegraf-rs-bjpkt	1/1	Running	0
7m48s			
telemetry-service-6684696c64-qzfdf	1/1	Running	0
10m			
tenancy-6596b6c54d-vmppm	1/1	Running	0
10m			
traefik-7489dc59f9-6mnst	1/1	Running	0
3m19s			
traefik-7489dc59f9-xrkkg	1/1	Running	0
3m4s			
trident-svc-6c8dc458f5-jswcl	1/1	Running	0
10m			
vault-controller-6b954f9b76-gz9nm	1/1	Running	0
11m			

2. (Optional) To ensure the installation is completed, you can watch the `acc-operator` logs using the following command.

```
kubectl logs deploy/acc-operator-controller-manager -n netapp-acc-operator -c manager -f
```



`accHost` cluster registration is one of the last operations, and if it fails it will not cause deployment to fail. In the event of a cluster registration failure indicated in the logs, you can attempt registration again through the add cluster workflow [in the UI](#) or API.

3. When all the pods are running, verify that the installation was successful (`READY` is `True`) and get the one-time password you will use when you log in to Astra Control Center:

```
kubectl get AstraControlCenter -n netapp-acc
```

Response:

NAME	UUID	VERSION	ADDRESS
READY			
astra	ACC-9aa5fdae-4214-4cb7-9976-5d8b4c0ce27f	22.08.1-26	
10.111.111.111	True		



Copy the UUID value. The password is `ACC-` followed by the UUID value (`ACC-[UUID]` or, in this example, `ACC-9aa5fdae-4214-4cb7-9976-5d8b4c0ce27f`).

Set up ingress for load balancing

You can set up a Kubernetes ingress controller that manages external access to services, such as load balancing in a cluster.

This procedure explains how to set up an ingress controller (`ingressType:Generic`). This is the default action with Astra Control Center. After Astra Control Center is deployed, you will need to configure the ingress controller to expose Astra Control Center with a URL.



If you don't want to set up an ingress controller, you can set `ingressType:AccTraefik`. Astra Control Center uses a service of the type "LoadBalancer" (`svc/traefik` in the Astra Control Center namespace), and requires that it be assigned an accessible external IP address. If load balancers are permitted in your environment and you don't already have one configured, you can use MetalLB or another external service load balancer to assign an external IP address to the service. In the internal DNS server configuration, you should point the chosen DNS name for Astra Control Center to the load-balanced IP address. For details about the service type of "LoadBalancer" and ingress, see [Requirements](#).

The steps differ depending on the type of ingress controller you use:

- Istio ingress
- Nginx ingress controller
- OpenShift ingress controller

What you'll need

- The required [ingress controller](#) should already be deployed.
- The [ingress class](#) corresponding to the ingress controller should already be created.
- You are using Kubernetes versions between and including v1.19 and v1.22.

Steps for Istio ingress

1. Configure Istio ingress.



This procedure assumes that Istio is deployed using the "default" configuration profile.

2. Gather or create the desired certificate and private key file for the Ingress Gateway.

You can use a CA-signed or self-signed certificate. The common name must be the Astra address (FQDN).

Sample command:

```
openssl req -x509 -nodes -days 365 -newkey rsa:2048
-keyout tls.key -out tls.crt
```

3. Create a secret `tls` secret name of type `kubernetes.io/tls` for a TLS private key and certificate in the `istio-system` namespace as described in [TLS secrets](#).

Sample command:

```
kubectl create secret tls [tls secret name]
--key="tls.key"
--cert="tls.crt" -n istio-system
```



The name of the secret should match the `spec.tls.secretName` provided in `istio-ingress.yaml` file.

4. Deploy an ingress resource in `netapp-acc` (or custom-named) namespace using either the `v1beta1` (deprecated in Kubernetes version less than or 1.22) or `v1` resource type for either a deprecated or a new schema:

Output:

```

apiVersion: networking.k8s.io/v1beta1
kind: IngressClass
metadata:
  name: istio
spec:
  controller: istio.io/ingress-controller
---
apiVersion: networking.k8s.io/v1beta1
kind: Ingress
metadata:
  name: ingress
  namespace: istio-system
spec:
  ingressClassName: istio
  tls:
  - hosts:
    - <ACC address>
    secretName: [tls secret name]
  rules:
  - host: [ACC address]
    http:
      paths:
      - path: /
        pathType: Prefix
        backend:
          serviceName: traefik
          servicePort: 80

```

For the v1 new schema, follow this sample:

```
kubectl apply -f istio-Ingress.yaml
```

Output:

```

apiVersion: networking.k8s.io/v1
kind: IngressClass
metadata:
  name: istio
spec:
  controller: istio.io/ingress-controller
---
apiVersion: networking.k8s.io/v1
kind: Ingress
metadata:
  name: ingress
  namespace: istio-system
spec:
  ingressClassName: istio
  tls:
  - hosts:
    - <ACC address>
    secretName: [tls secret name]
  rules:
  - host: [ACC address]
    http:
      paths:
      - path: /
        pathType: Prefix
        backend:
          service:
            name: traefik
            port:
              number: 80

```

5. Deploy Astra Control Center as usual.

6. Check the status of the ingress:

```
kubectl get ingress -n netapp-acc
```

Response:

NAME	CLASS	HOSTS	ADDRESS	PORTS	AGE
ingress	istio	astra.example.com	172.16.103.248	80, 443	1h

Steps for Nginx ingress controller

1. Create a secret of type `kubernetes.io/tls` for a TLS private key and certificate in `netapp-acc` (or custom-named) namespace as described in [TLS secrets](#).

2. Deploy an ingress resource in `netapp-acc` (or custom-named) namespace using either the `v1beta1` (deprecated in Kubernetes version less than or 1.22) or `v1` resource type for either a deprecated or a new schema:

- a. For a `v1beta1` deprecated schema, follow this sample:

```
apiVersion: extensions/v1beta1
Kind: IngressClass
metadata:
  name: ingress-acc
  namespace: [netapp-acc or custom namespace]
  annotations:
    kubernetes.io/ingress.class: [class name for nginx controller]
spec:
  tls:
  - hosts:
    - <ACC address>
    secretName: [tls secret name]
  rules:
  - host: [ACC address]
    http:
      paths:
      - backend:
          serviceName: traefik
          servicePort: 80
          pathType: ImplementationSpecific
```

- b. For the `v1` new schema, follow this sample:

```

apiVersion: networking.k8s.io/v1
kind: Ingress
metadata:
  name: netapp-acc-ingress
  namespace: [netapp-acc or custom namespace]
spec:
  ingressClassName: [class name for nginx controller]
  tls:
  - hosts:
    - <ACC address>
    secretName: [tls secret name]
  rules:
  - host: <ACC address>
    http:
      paths:
      - path:
          backend:
            service:
              name: traefik
              port:
                number: 80
            pathType: ImplementationSpecific

```

Steps for OpenShift ingress controller

1. Procure your certificate and get the key, certificate, and CA files ready for use by the OpenShift route.
2. Create the OpenShift route:

```

oc create route edge --service=traefik
--port=web -n [netapp-acc or custom namespace]
--insecure-policy=Redirect --hostname=<ACC address>
--cert=cert.pem --key=key.pem

```

Log in to the Astra Control Center UI

After installing Astra Control Center, you will change the password for the default administrator and log in to the Astra Control Center UI dashboard.

Steps

1. In a browser, enter the FQDN you used in the `astraAddress` in the `astra_control_center_min.yaml` CR when [you installed Astra Control Center](#).
2. Accept the self-signed certificates when prompted.



You can create a custom certificate after login.

3. At the Astra Control Center login page, enter the value you used for `email` in `astra_control_center_min.yaml` CR when [you installed Astra Control Center](#), followed by the one-time password (`ACC-[UUID]`).



If you enter an incorrect password three times, the admin account will be locked for 15 minutes.

4. Select **Login**.
5. Change the password when prompted.



If this is your first login and you forget the password and no other administrative user accounts have yet been created, contact NetApp Support for password recovery assistance.

6. (Optional) Remove the existing self-signed TLS certificate and replace it with a [custom TLS certificate signed by a Certificate Authority \(CA\)](#).

Troubleshoot the installation

If any of the services are in `Error` status, you can inspect the logs. Look for API response codes in the 400 to 500 range. Those indicate the place where a failure happened.

Steps

1. To inspect the Astra Control Center operator logs, enter the following:

```
kubectl logs --follow -n netapp-acc-operator $(kubectl get pods -n netapp-acc-operator -o name) -c manager
```

What's next

Complete the deployment by performing [setup tasks](#).

Understand pod security policy restrictions

Astra Control Center supports privilege limitation through pod security policies (PSPs). Pod security policies enable you to limit what users or groups are able to run containers and what privileges those containers can have.

Some Kubernetes distributions, such as RKE2, have a default pod security policy that is too restrictive, and causes problems when installing Astra Control Center.

You can use the information and examples included here to understand the pod security policies that Astra Control Center creates, and configure pod security policies that provide the protection you need without interfering with Astra Control Center functions.

PSPs installed by Astra Control Center

Astra Control Center creates several pod security policies during installation. Some of these are permanent, and some of them are created during certain operations and are removed once the operation is complete.

PSPs created during installation

During Astra Control Center installation, the Astra Control Center operator installs a custom pod security policy, a Role object, and a RoleBinding object to support the deployment of Astra Control Center services in the Astra Control Center namespace.

The new policy and objects have the following attributes:

```
kubectl get psp
```

NAME	FSGROUP	SUPGROUP	PRIV	CAPS	SELINUX	RUNASUSER
			READONLYROOTFS	VOLUMES		
avp-ppsp			false		RunAsAny	RunAsAny
RunAsAny	RunAsAny	false		*		
netapp-astra-deployment-ppsp			false		RunAsAny	RunAsAny
RunAsAny	RunAsAny	false		*		

```
kubectl get role
```

NAME	CREATED AT
netapp-astra-deployment-role	2022-06-27T19:34:58Z

```
kubectl get rolebinding
```

NAME	ROLE
AGE	
netapp-astra-deployment-rb	Role/netapp-astra-deployment-role
32m	

PSPs created during backup operations

During backup operations, Astra Control Center creates a dynamic pod security policy, a ClusterRole object, and a RoleBinding object. These support the backup process, which happens in a separate namespace.

The new policy and objects have the following attributes:

```
kubectl get psp
```

NAME		PRIV	CAPS		
SELINUX	RUNASUSER	FSGROUP	SUPGROUP	READONLYROOTFS	
VOLUMES					
netapp-astra-backup		false	DAC_READ_SEARCH		
RunAsAny	RunAsAny	RunAsAny	RunAsAny	false	*

```
kubectl get role
```

NAME	CREATED AT
netapp-astra-backup	2022-07-21T00:00:00Z

```
kubectl get rolebinding
```

NAME	ROLE	AGE
netapp-astra-backup	Role/netapp-astra-backup	62s

PSPs created during cluster management

When you manage a cluster, Astra Control Center installs the netapp-monitoring operator in the managed cluster. This operator creates a pod security policy, a ClusterRole object, and a RoleBinding object to deploy telemetry services in the Astra Control Center namespace.

The new policy and objects have the following attributes:

```
kubectl get psp
```

NAME		PRIV	CAPS		
SELINUX	RUNASUSER	FSGROUP	SUPGROUP	READONLYROOTFS	
VOLUMES					
netapp-monitoring-psp-nkmo		true	AUDIT_WRITE,NET_ADMIN,NET_RAW		
RunAsAny	RunAsAny	RunAsAny	RunAsAny	false	*

```
kubectl get role
```

NAME	CREATED AT
netapp-monitoring-role-privileged	2022-07-21T00:00:00Z

```
kubectl get rolebinding
```

NAME	ROLE	
AGE		
netapp-monitoring-role-binding-privileged	Role/netapp-	
monitoring-role-privileged		2m5s

Enable network communication between namespaces

Some environments use NetworkPolicy constructs to restrict traffic between namespaces. The Astra Control Center operator, Astra Control Center, and the Astra Plugin for VMware vSphere are all in different namespaces. The services in these different namespaces need to be able to communicate with one another. To enable this communication, follow these steps.

Steps

1. Delete any NetworkPolicy resources that exist in the Astra Control Center namespace:

```
kubectl get networkpolicy -n netapp-acc
```

2. For each NetworkPolicy object that is returned by the preceding command, use the following command to delete it. Replace <OBJECT_NAME> with the name of the returned object:

```
kubectl delete networkpolicy <OBJECT_NAME> -n netapp-acc
```

3. Apply the following resource file to configure the acc-avp-network-policy object to allow Astra Plugin for VMware vSphere services to make requests to Astra Control Center services. Replace the information in brackets <> with information from your environment:

```
apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
  name: acc-avp-network-policy
  namespace: <ACC_NAMESPACE_NAME> # REPLACE THIS WITH THE ASTRA CONTROL
CENTER NAMESPACE NAME
spec:
  podSelector: {}
  policyTypes:
    - Ingress
  ingress:
    - from:
      - namespaceSelector:
          matchLabels:
            kubernetes.io/metadata.name: <PLUGIN_NAMESPACE_NAME> #
REPLACE THIS WITH THE ASTRA PLUGIN FOR VMWARE VSPHERE NAMESPACE NAME
```

4. Apply the following resource file to configure the acc-operator-network-policy object to allow the Astra Control Center operator to communicate with Astra Control Center services. Replace the information in brackets <> with information from your environment:

```

apiVersion: networking.k8s.io/v1
kind: NetworkPolicy
metadata:
  name: acc-operator-network-policy
  namespace: <ACC_NAMESPACE_NAME> # REPLACE THIS WITH THE ASTRA CONTROL
CENTER NAMESPACE NAME
spec:
  podSelector: {}
  policyTypes:
    - Ingress
  ingress:
    - from:
      - namespaceSelector:
          matchLabels:
            kubernetes.io/metadata.name: <NETAPP-ACC-OPERATOR> #
REPLACE THIS WITH THE OPERATOR NAMESPACE NAME

```

Remove resource limitations

Some environments use the ResourceQuotas and LimitRanges objects to prevent the resources in a namespace from consuming all available CPU and memory on the cluster. Astra Control Center does not set maximum limits, so it will not be in compliance with those resources. You need to remove them from the namespaces where you plan to install Astra Control Center.

You can use the following steps to retrieve and remove these quotas and limits. In these examples, the command output is shown immediately after the command.

Steps

1. Get the resource quotas in the netapp-acc namespace:

```
kubectl get quota -n netapp-acc
```

Response:

NAME	AGE	REQUEST	LIMIT
pods-high	16s	requests.cpu: 0/20, requests.memory: 0/100Gi	
limits.cpu: 0/200, limits.memory: 0/1000Gi			
pods-low	15s	requests.cpu: 0/1, requests.memory: 0/1Gi	
limits.cpu: 0/2, limits.memory: 0/2Gi			
pods-medium	16s	requests.cpu: 0/10, requests.memory: 0/20Gi	
limits.cpu: 0/20, limits.memory: 0/200Gi			

2. Delete all of the resource quotas by name:

```
kubectl delete resourcequota pods-high -n netapp-acc
```

```
kubectl delete resourcequota pods-low -n netapp-acc
```

```
kubectl delete resourcequota pods-medium -n netapp-acc
```

3. Get the limit ranges in the netapp-acc namespace:

```
kubectl get limits -n netapp-acc
```

Response:

NAME	CREATED AT
cpu-limit-range	2022-06-27T19:01:23Z

4. Delete the limit ranges by name:

```
kubectl delete limitrange cpu-limit-range -n netapp-acc
```

Install Astra Control Center using OpenShift OperatorHub

If you use Red Hat OpenShift, you can install Astra Control Center using the Red Hat certified operator. Use this procedure to install Astra Control Center from the [Red Hat Ecosystem Catalog](#) or using the Red Hat OpenShift Container Platform.

After you complete this procedure, you must return to the installation procedure to complete the [remaining steps](#) to verify installation success and log on.

What you'll need

- [Before you begin installation, prepare your environment for Astra Control Center deployment.](#)
- From your OpenShift cluster, ensure all cluster operators are in a healthy state (available is true):

```
oc get clusteroperators
```

- From your OpenShift cluster, ensure all API services are in a healthy state (available is true):

```
oc get apiservices
```

- Create an FQDN address for Astra Control Center in your data center.
- Obtain the necessary permissions and access to the Red Hat OpenShift Container Platform to perform the installation steps described.
- If a cert-manager already exists in the cluster, you need to perform some [prerequisite steps](#) so that Astra Control Center does not install its own cert-manager.

Steps

- [Download and unpack the Astra Control Center bundle](#)
- [Install the NetApp Astra kubectl plugin](#)
- [Add the images to your local registry](#)
- [Find the operator install page](#)
- [Install the operator](#)
- [Install Astra Control Center](#)

Download and unpack the Astra Control Center bundle

1. Download the Astra Control Center bundle (`astra-control-center-[version].tar.gz`) from the [NetApp Support Site](#).
2. Download the zip of Astra Control Center certificates and keys from the [NetApp Support Site](#).
3. (Optional) Use the following command to verify the signature of the bundle:

```
openssl dgst -sha256 -verify AstraControlCenter-public.pub -signature
astra-control-center-[version].tar.gz.sig astra-control-center-
[version].tar.gz
```

4. Extract the images:

```
tar -vxzf astra-control-center-[version].tar.gz
```

Install the NetApp Astra kubectl plugin

The NetApp Astra `kubectl` command line plugin saves time when performing common tasks associated with deploying and upgrading Astra Control Center.

What you'll need

NetApp provides binaries for the plugin for different CPU architectures and operating systems. You need to know which CPU and operating system you have before you perform this task. On Linux and Mac operating systems, you can use the `uname -a` command to gather this information.

Steps

1. List the available NetApp Astra `kubectl` plugin binaries, and note the name of the file you need for your operating system and CPU architecture:

```
ls kubectl-astra/
```

2. Copy the file to the same location as the standard `kubectl` utility. In this example, the `kubectl` utility is located in the `/usr/local/bin` directory. Replace `<binary-name>` with the name of the file you need:

```
cp kubectl-astra/<binary-name> /usr/local/bin/kubectl-astra
```

Add the images to your local registry

1. Complete the appropriate step sequence for your container engine:

Docker

1. Change to the Astra directory:

```
cd acc
```

2. Push the package images in the Astra Control Center image directory to your local registry. Make the following substitutions before running the command:

- Replace BUNDLE_FILE with the name of the Astra Control bundle file (for example, acc.manifest.yaml).
- Replace MY_REGISTRY with the URL of the Docker repository.
- Replace MY_REGISTRY_USER with the user name.
- Replace MY_REGISTRY_TOKEN with an authorized token for the registry.

```
kubectl astra packages push-images -m BUNDLE_FILE -r MY_REGISTRY  
-u MY_REGISTRY_USER -p MY_REGISTRY_TOKEN
```

Podman

1. Log in to your registry:

```
podman login [your_registry_path]
```

2. Run the following script, making the <YOUR_REGISTRY> substitution as noted in the comments:


```

# You need to be at the root of the tarball.
# You should see these files to confirm correct location:
#   acc.manifest.yaml
#   acc/

# Replace <YOUR_REGISTRY> with your own registry (e.g
registry.customer.com or registry.customer.com/testing, etc..)
export REGISTRY=<YOUR_REGISTRY>
export PACKAGENAME=acc
export PACKAGEVERSION=22.08.1-26
export DIRECTORYNAME=acc
for astraImageFile in $(ls ${DIRECTORYNAME}/images/*.tar) ; do
    # Load to local cache
    astraImage=$(podman load --input ${astraImageFile} | sed 's/Loaded
image(s): //'')

    # Remove path and keep imageName.
    astraImageNoPath=$(echo ${astraImage} | sed 's:.*/::')


    # Tag with local image repo.
    podman tag ${astraImage} ${REGISTRY}/netapp/astra/${PACKAGENAME}
/${PACKAGEVERSION}/${astraImageNoPath}

    # Push to the local repo.
    podman push ${REGISTRY}/netapp/astra/${PACKAGENAME}/
${PACKAGEVERSION}/${astraImageNoPath}
done


```

Find the operator install page

1. Complete one of the following procedures to access the operator install page:
 - From Red Hat Openshift web console:

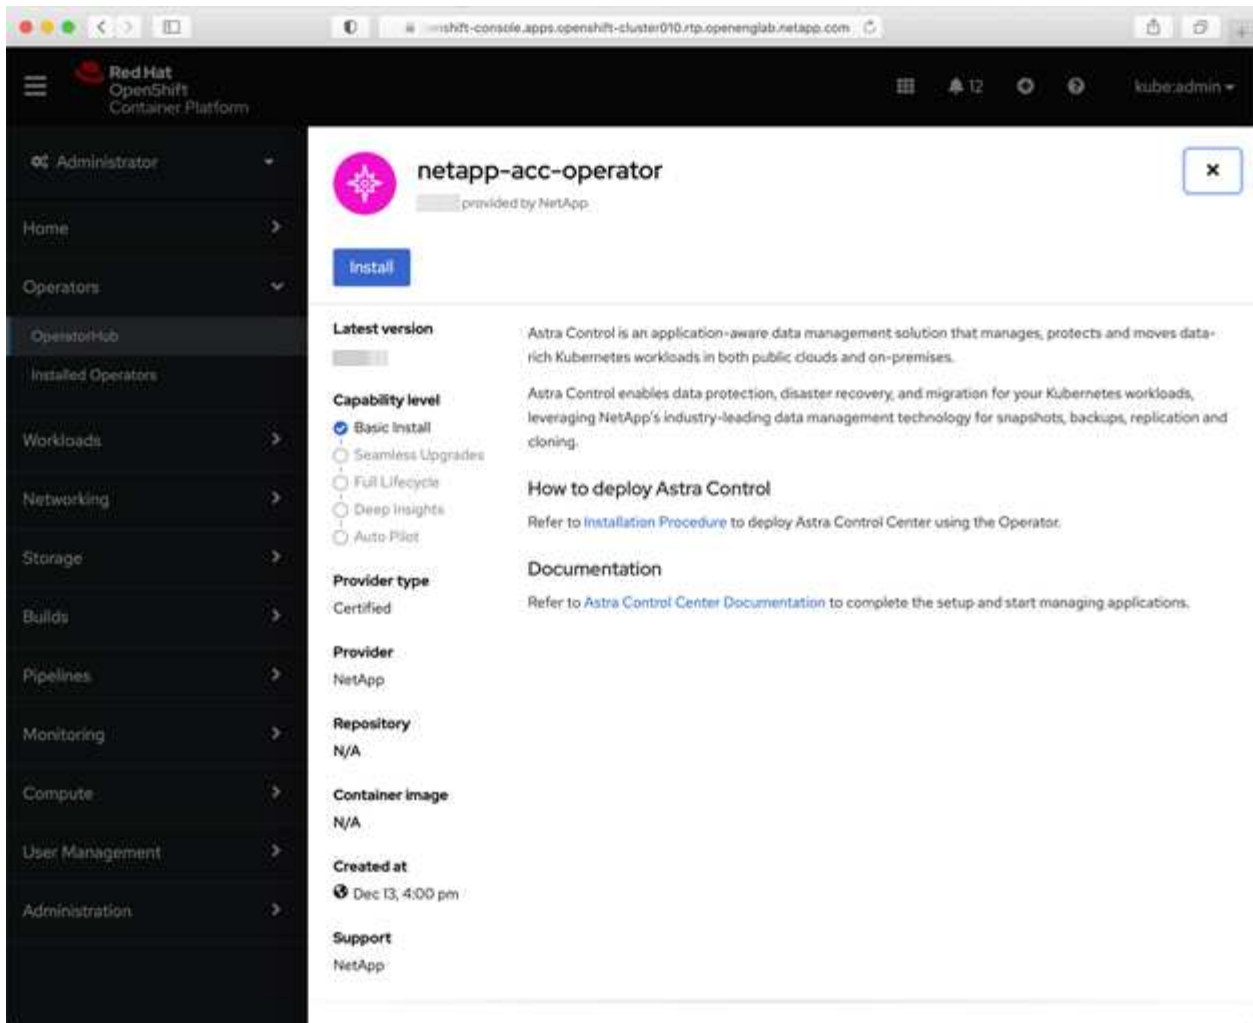


- a. Log in to the OpenShift Container Platform UI.
 - b. From the side menu, select **Operators > OperatorHub**.
 - c. Select the NetApp Astra Control Center operator.
 - d. Select **Install**.
- From Red Hat Ecosystem Catalog:

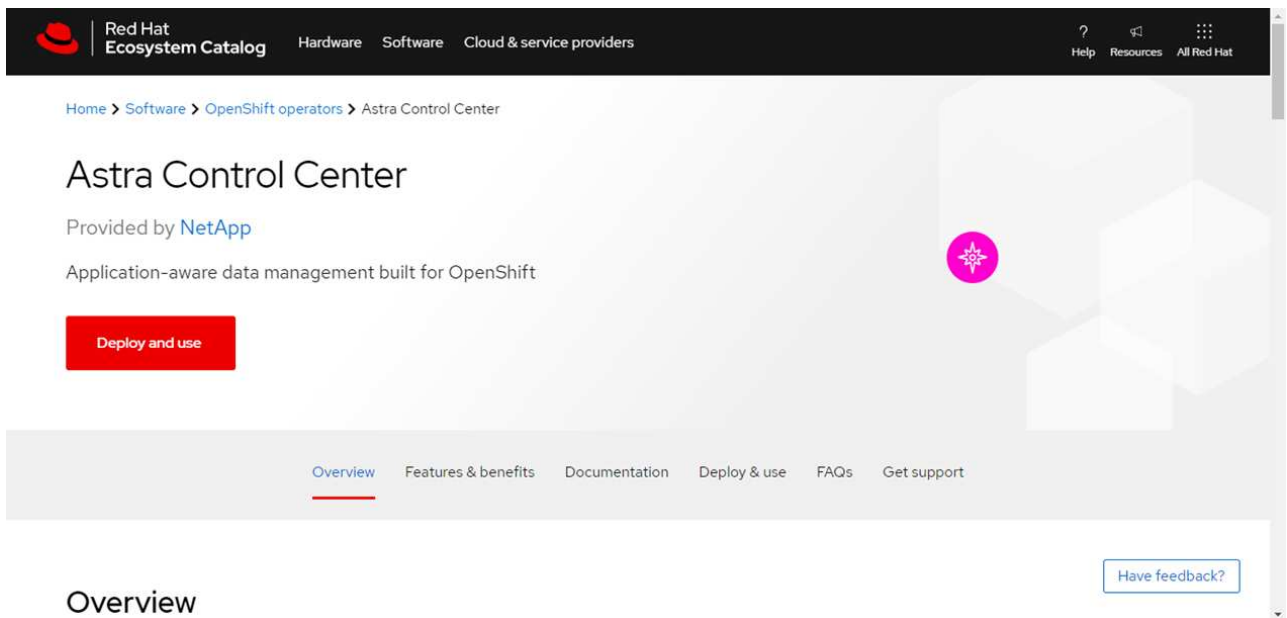


- Overview**
- Select the NetApp Astra Control Center [operator](#).
 - Select **Deploy and Use**.

Install the operator


- Complete the **Install Operator** page and install the operator:

 The operator will be available in all cluster namespaces.

- Select the operator namespace or `netapp-acc-operator` namespace will be created automatically as part of the operator installation.
- Select a manual or automatic approval strategy.

 Manual approval is recommended. You should only have a single operator instance running per cluster.

- Select **Install**.

 If you selected a manual approval strategy, you will be prompted to approve the manual install plan for this operator.

- From the console, go to the OperatorHub menu and confirm that the operator installed successfully.

Install Astra Control Center

- From the console within the details view of the Astra Control Center operator, select `Create instance` in the Provided APIs section.
- Complete the `Create AstraControlCenter` form field:
 - Keep or adjust the Astra Control Center name.
 - (Optional) Enable or disable Auto Support. Retaining Auto Support functionality is recommended.
 - Enter the Astra Control Center address. Do not enter `http://` or `https://` in the address.

- d. Enter the Astra Control Center version; for example, 21.12.60.
 - e. Enter an account name, email address, and admin last name.
 - f. Retain the default volume reclaim policy.
 - g. In **Image Registry**, enter your local container image registry path. Do not enter `http://` or `https://` in the address.
 - h. If you use a registry that requires authentication, enter the secret.
 - i. Enter the admin first name.
 - j. Configure resources scaling.
 - k. Retain the default storage class.
 - l. Define CRD handling preferences.
3. Select **Create**.

What's next

Verify the successful installation of Astra Control Center and complete the [remaining steps](#) to log in. Additionally, you will complete the deployment by also performing [setup tasks](#).

Install Astra Control Center with a Cloud Volumes ONTAP storage backend

With Astra Control Center, you can manage your apps in a hybrid cloud environment with self-managed Kubernetes clusters and Cloud Volumes ONTAP instances. You can deploy Astra Control Center in your on-premise Kubernetes clusters or in one of the self-managed Kubernetes clusters in the cloud environment.

With one of these deployments, you can perform app data management operations using Cloud Volumes ONTAP as a storage backend. You can also configure an S3 bucket as the backup target.

To install Astra Control Center in Amazon Web Services (AWS), Google Cloud Platform (GCP) and Microsoft Azure with a Cloud Volumes ONTAP storage backend, perform the following steps depending on your cloud environment.

- [Deploy Astra Control Center in Amazon Web Services](#)
- [Deploy Astra Control Center in Google Cloud Platform](#)
- [Deploy Astra Control Center in Microsoft Azure](#)

You can manage your apps in distributions with self-managed Kubernetes clusters, such with OpenShift Container Platform (OCP). Only self-managed OCP clusters are validated for deploying Astra Control Center.

Deploy Astra Control Center in Amazon Web Services

You can deploy Astra Control Center on a self-managed Kubernetes cluster hosted on an Amazon Web Services (AWS) public cloud.

What you'll need for AWS

Before you deploy Astra Control Center in AWS, you will need the following items:

- Astra Control Center license. See [Astra Control Center licensing requirements](#).
- [Meet Astra Control Center requirements](#).
- NetApp Cloud Central account
- If using OCP, Red Hat OpenShift Container Platform (OCP) permissions (on namespace level to create pods)
- AWS credentials, Access ID and Secret Key with permissions that enable you to create buckets and connectors
- AWS account Elastic Container Registry (ECR) access and login
- AWS hosted zone and Route 53 entry required to access the Astra Control UI

Operational environment requirements for AWS

Astra Control Center requires the following operational environment for AWS:

- Red Hat OpenShift Container Platform 4.8



Ensure that the operating environment you choose to host Astra Control Center meets the basic resource requirements outlined in the environment's official documentation.

Astra Control Center requires the following resources in addition to the environment's resource requirements:

Component	Requirement
Backend NetApp Cloud Volumes ONTAP storage capacity	At least 300GB available
Worker nodes (AWS EC2 requirement)	At least 3 worker nodes total, with 4 vCPU cores and 12GB RAM each
Load balancer	Service type "LoadBalancer" available for ingress traffic to be sent to services in the operational environment cluster
FQDN	A method for pointing the FQDN of Astra Control Center to the load balanced IP address
Astra Trident (installed as part of the Kubernetes cluster discovery in NetApp Cloud Manager)	Astra Trident 21.04 or newer installed and configured and NetApp ONTAP version 9.5 or newer as a storage backend
Image registry	<p>You must have an existing private registry, such as AWS Elastic Container Registry, to which you can push Astra Control Center build images. You need to provide the URL of the image registry where you will upload the images.</p> <div> <p>The Astra Control Center hosted cluster and the managed cluster must have access to the same image registry to be able to back up and restore apps using the Restic-based image.</p> </div>

Component	Requirement
Astra Trident / ONTAP configuration	<p>Astra Control Center requires that a storage class be created and set as the default storage class. Astra Control Center supports the following ONTAP Kubernetes storage classes that are created when you import your Kubernetes cluster into NetApp Cloud Manager. These are provided by Astra Trident:</p> <ul style="list-style-type: none"> • <code>vsaworkingenvironment-<>-ha-nas</code> <code>csi.trident.netapp.io</code> • <code>vsaworkingenvironment-<>-ha-san</code> <code>csi.trident.netapp.io</code> • <code>vsaworkingenvironment-<>-single-nas</code> <code>csi.trident.netapp.io</code> • <code>vsaworkingenvironment-<>-single-san</code> <code>csi.trident.netapp.io</code>



These requirements assume that Astra Control Center is the only application running in the operational environment. If the environment is running additional applications, adjust these minimum requirements accordingly.



The AWS registry token expires in 12 hours, after which you will have to renew the Docker image registry secret.

Overview of deployment for AWS

Here is an overview of the process to install Astra Control Center for AWS with Cloud Volumes ONTAP as a storage backend.

Each of these steps is explained in more detail below.

1. [Ensure that you have sufficient IAM permissions.](#)
2. [Install a RedHat OpenShift cluster on AWS.](#)
3. [Configure AWS.](#)
4. [Configure NetApp Cloud Manager.](#)
5. [Install Astra Control Center.](#)

Ensure that you have sufficient IAM permissions

Ensure that you have sufficient IAM roles and permissions that enable you to install a RedHat OpenShift cluster and a NetApp Cloud Manager Connector.

See [Initial AWS credentials](#).

Install a RedHat OpenShift cluster on AWS

Install a RedHat OpenShift Container Platform cluster on AWS.

For installation instructions, see [Installing a cluster on AWS in OpenShift Container Platform](#).

Configure AWS

Next, configure AWS to create a virtual network, set up EC2 compute instances, create an AWS S3 bucket, create an Elastic Container Register (ECR) to host the Astra Control Center images, and push the images to this registry.

Follow the AWS documentation to complete the following steps. See [AWS installation documentation](#).

1. Create an AWS virtual network.
2. Review the EC2 compute instances. This can be a bare metal server or VMs in AWS.
3. If the instance type does not already match the Astra minimum resource requirements for master and worker nodes, change the instance type in AWS to meet the Astra requirements. See [Astra Control Center requirements](#).
4. Create at least one AWS S3 bucket to store your backups.
5. Create an AWS Elastic Container Registry (ECR) to host all the ACC images.



If you do not create the ECR, Astra Control Center cannot access monitoring data from a cluster containing Cloud Volumes ONTAP with an AWS backend. The issue is caused when the cluster you try to discover and manage using Astra Control Center does not have AWS ECR access.

6. Push the ACC images to your defined registry.



The AWS Elastic Container Registry (ECR) token expires after 12 hours and causes cross-cluster clone operations to fail. This issue occurs when managing a storage backend from Cloud Volumes ONTAP configured for AWS. To correct this issue, authenticate with the ECR again and generate a new secret for clone operations to resume successfully.

Here's an example of an AWS deployment:



Configure NetApp Cloud Manager

Using Cloud Manager, create a workspace, add a connector to AWS, create a working environment, and import the cluster.

Follow the Cloud Manager documentation to complete the following steps. See the following:

- [Getting started with Cloud Volumes ONTAP in AWS.](#)
- [Create a connector in AWS using Cloud Manager](#)

Steps

1. Add your credentials to Cloud Manager.
2. Create a workspace.
3. Add a connector for AWS. Choose AWS as the Provider.
4. Create a working environment for your cloud environment.
 - a. Location: "Amazon Web Services (AWS)"
 - b. Type: "Cloud Volumes ONTAP HA"
5. Import the OpenShift cluster. The cluster will connect to the working environment you just created.
 - a. View the NetApp cluster details by selecting **K8s** > **Cluster list** > **Cluster Details**.

- b. In the upper right corner, note the Trident version.
- c. Note the Cloud Volumes ONTAP cluster storage classes showing NetApp as the provisioner.

This imports your Red Hat OpenShift cluster and assigns it a default storage class. You select the storage class.

Trident is automatically installed as part of the import and discovery process.

- 6. Note all the persistent volumes and volumes in this Cloud Volumes ONTAP deployment.



Cloud Volumes ONTAP can operate as a single node or in High Availability. If HA is enabled, note the HA status and node deployment status running in AWS.

Install Astra Control Center

Follow the standard [Astra Control Center installation instructions](#).



AWS uses the Generic S3 bucket type.

Deploy Astra Control Center in Google Cloud Platform

You can deploy Astra Control Center on a self-managed Kubernetes cluster hosted on a Google Cloud Platform (GCP) public cloud.

What you'll need for GCP

Before you deploy Astra Control Center in GCP, you will need the following items:

- Astra Control Center license. See [Astra Control Center licensing requirements](#).
- [Meet Astra Control Center requirements](#).
- NetApp Cloud Central account
- If using OCP, Red Hat OpenShift Container Platform (OCP) 4.10
- If using OCP, Red Hat OpenShift Container Platform (OCP) permissions (on namespace level to create pods)
- GCP Service Account with permissions that enable you to create buckets and connectors


Operational environment requirements for GCP



Ensure that the operating environment you choose to host Astra Control Center meets the basic resource requirements outlined in the environment's official documentation.

Astra Control Center requires the following resources in addition to the environment's resource requirements:

Component	Requirement
Backend NetApp Cloud Volumes ONTAP storage capacity	At least 300GB available
Worker nodes (GCP compute requirement)	At least 3 worker nodes total, with 4 vCPU cores and 12GB RAM each

Component	Requirement
Load balancer	Service type "LoadBalancer" available for ingress traffic to be sent to services in the operational environment cluster
FQDN (GCP DNS zone)	A method for pointing the FQDN of Astra Control Center to the load balanced IP address
Astra Trident (installed as part of the Kubernetes cluster discovery in NetApp Cloud Manager)	Astra Trident 21.04 or newer installed and configured and NetApp ONTAP version 9.5 or newer as a storage backend
Image registry	<p>You must have an existing private registry, such as Google Container Registry, to which you can push Astra Control Center build images. You need to provide the URL of the image registry where you will upload the images.</p> <div>  <p>You need to enable anonymous access to pull Restic images for backups.</p> </div>
Astra Trident / ONTAP configuration	<p>Astra Control Center requires that a storage class be created and set as the default storage class. Astra Control Center supports the following ONTAP Kubernetes storage classes that are created when you import your Kubernetes cluster into NetApp Cloud Manager. These are provided by Astra Trident:</p> <ul style="list-style-type: none"> vsaworkingenvironment-<>-ha-nas csi.trident.netapp.io vsaworkingenvironment-<>-ha-san csi.trident.netapp.io vsaworkingenvironment-<>-single-nas csi.trident.netapp.io vsaworkingenvironment-<>-single-san csi.trident.netapp.io



These requirements assume that Astra Control Center is the only application running in the operational environment. If the environment is running additional applications, adjust these minimum requirements accordingly.

Overview of deployment for GCP

Here is an overview of the process to install Astra Control Center on a self-managed OCP cluster in GCP with Cloud Volumes ONTAP as a storage backend.

Each of these steps is explained in more detail below.

1. [Install a RedHat OpenShift cluster on GCP.](#)
2. [Create a GCP Project and Virtual Private Cloud.](#)

3. [Ensure that you have sufficient IAM permissions.](#)
4. [Configure GCP.](#)
5. [Configure NetApp Cloud Manager.](#)
6. [Install and configure Astra Control Center.](#)

Install a RedHat OpenShift cluster on GCP

The first step is to install a RedHat OpenShift cluster on GCP.

For installation instructions, see the following:

- [Installing an OpenShift cluster in GCP](#)
- [Creating a GCP Service Account](#)

Create a GCP Project and Virtual Private Cloud

Create at least one GCP Project and Virtual Private Cloud (VPC).



OpenShift might create its own resource groups. In addition to these, you should also define a GCP VPC. Refer to OpenShift documentation.

You might want to create a platform cluster resource group and a target app OpenShift cluster resource group.

Ensure that you have sufficient IAM permissions

Ensure that you have sufficient IAM roles and permissions that enable you to install a RedHat OpenShift cluster and a NetApp Cloud Manager Connector.

See [Initial GCP credentials and permissions](#).

Configure GCP

Next, configure GCP to create a VPC, set up compute instances, create a Google Cloud Object Storage, create an Google Container Register to host the Astra Control Center images, and push the images to this registry.

Follow the GCP documentation to complete the following steps. See [Installing OpenShift cluster in GCP](#).

1. Create a GCP Project and VPC in the GCP that you plan on using for the OCP cluster with CVO backend.
2. Review the compute instances. This can be a bare metal server or VMs in GCP.
3. If the instance type does not already match the Astra minimum resource requirements for master and worker nodes, change the instance type in GCP to meet the Astra requirements. See [Astra Control Center requirements](#).
4. Create at least one GCP Cloud Storage Bucket to store your backups.
5. Create a secret, which is required for bucket access.
6. Create a Google Container Registry to host all the Astra Control Center images.
7. Set up Google Container Registry access for Docker push/pull for all the Astra Control Center images.

Example: ACC images can be pushed to this registry by entering the following script:

```
gcloud auth activate-service-account <service account email address>
--key-file=<GCP Service Account JSON file>
```

This script requires an Astra Control Center manifest file and your Google Image Registry location.

Example:

```
manifestfile=astra-control-center-<version>.manifest
GCP_CR_REGISTRY=<target image repository>
ASTRA_REGISTRY=<source ACC image repository>

while IFS= read -r image; do
    echo "image: $ASTRA_REGISTRY/$image $GCP_CR_REGISTRY/$image"
    root_image=${image%:*}
    echo $root_image
    docker pull $ASTRA_REGISTRY/$image
    docker tag $ASTRA_REGISTRY/$image $GCP_CR_REGISTRY/$image
    docker push $GCP_CR_REGISTRY/$image
done < astra-control-center-22.04.41.manifest
```

8. Set up DNS zones.

Configure NetApp Cloud Manager

Using Cloud Manager, create a workspace, add a connector to GCP, create a working environment, and import the cluster.

Follow the Cloud Manager documentation to complete the following steps. See [Getting started with Cloud Volumes ONTAP in GCP](#).

What you'll need

- Access to the GCP Service Account with the required IAM permissions and roles

Steps

1. Add your credentials to Cloud Manager. See [Adding GCP accounts](#).
2. Add a connector for GCP.
 - a. Choose "GCP" as the Provider.
 - b. Enter GCP credentials. See [Creating a connector in GCP from Cloud Manager](#).
 - c. Ensure that the connector is running and switch to that connector.
3. Create a working environment for your cloud environment.
 - a. Location: "GCP"
 - b. Type: "Cloud Volumes ONTAP HA"
4. Import the OpenShift cluster. The cluster will connect to the working environment you just created.
 - a. View the NetApp cluster details by selecting **K8s > Cluster list > Cluster Details**.

- b. In the upper right corner, note the Trident version.
- c. Note the Cloud Volumes ONTAP cluster storage classes showing "NetApp" as the provisioner.

This imports your Red Hat OpenShift cluster and assigns it a default storage class. You select the storage class.

Trident is automatically installed as part of the import and discovery process.

5. Note all the persistent volumes and volumes in this Cloud Volumes ONTAP deployment.



Cloud Volumes ONTAP can operate as a single node or in High Availability (HA). If HA is enabled, note the HA status and node deployment status running in GCP.

Install Astra Control Center

Follow the standard [Astra Control Center installation instructions](#).



GCP uses the Generic S3 bucket type.

1. Generate the Docker Secret to pull images for the Astra Control Center installation:

```
kubectl create secret docker-registry <secret name>
--docker-server=<Registry location>
--docker-username=_json_key
--docker-password="$(cat <GCP Service Account JSON file>)"
--namespace=pcloud
```

Deploy Astra Control Center in Microsoft Azure

You can deploy Astra Control Center on a self-managed Kubernetes cluster hosted on a Microsoft Azure public cloud.

What you'll need for Azure

Before you deploy Astra Control Center in Azure, you will need the following items:


- Astra Control Center license. See [Astra Control Center licensing requirements](#).
- [Meet Astra Control Center requirements](#).
- NetApp Cloud Central account
- If using OCP, Red Hat OpenShift Container Platform (OCP) 4.8
- If using OCP, Red Hat OpenShift Container Platform (OCP) permissions (on namespace level to create pods)
- Azure credentials with permissions that enable you to create buckets and connectors

Operational environment requirements for Azure

Ensure that the operating environment you choose to host Astra Control Center meets the basic resource requirements outlined in the environment's official documentation.

Astra Control Center requires the following resources in addition to the environment's resource requirements:

See [Astra Control Center operational environment requirements](#).

Component	Requirement
Backend NetApp Cloud Volumes ONTAP storage capacity	At least 300GB available
Worker nodes (Azure compute requirement)	At least 3 worker nodes total, with 4 vCPU cores and 12GB RAM each
Load balancer	Service type "LoadBalancer" available for ingress traffic to be sent to services in the operational environment cluster
FQDN (Azure DNS zone)	A method for pointing the FQDN of Astra Control Center to the load balanced IP address
Astra Trident (installed as part of the Kubernetes cluster discovery in NetApp Cloud Manager)	Astra Trident 21.04 or newer installed and configured and NetApp ONTAP version 9.5 or newer will be used as a storage backend
Image registry	<p>You must have an existing private registry, such as Azure Container Registry (ACR), to which you can push Astra Control Center build images. You need to provide the URL of the image registry where you will upload the images.</p> <div> You need to enable anonymous access to pull Restic images for backups.</div>
Astra Trident / ONTAP configuration	<p>Astra Control Center requires that a storage class be created and set as the default storage class. Astra Control Center supports the following ONTAP Kubernetes storage classes that are created when you import your Kubernetes cluster into NetApp Cloud Manager. These are provided by Astra Trident:</p> <ul style="list-style-type: none">• <code>vsaworkingenvironment-<>-ha-nas</code> <code>csi.trident.netapp.io</code>• <code>vsaworkingenvironment-<>-ha-san</code> <code>csi.trident.netapp.io</code>• <code>vsaworkingenvironment-<>-single-nas</code> <code>csi.trident.netapp.io</code>• <code>vsaworkingenvironment-<>-single-san</code> <code>csi.trident.netapp.io</code>



These requirements assume that Astra Control Center is the only application running in the operational environment. If the environment is running additional applications, adjust these minimum requirements accordingly.

Overview of deployment for Azure

Here is an overview of the process to install Astra Control Center for Azure.

Each of these steps is explained in more detail below.

1. [Install a RedHat OpenShift cluster on Azure.](#)
2. [Create Azure resource groups.](#)
3. [Ensure that you have sufficient IAM permissions.](#)
4. [Configure Azure.](#)
5. [Configure NetApp Cloud Manager.](#)
6. [Install and configure Astra Control Center.](#)

Install a RedHat OpenShift cluster on Azure

The first step is to install a RedHat OpenShift cluster on Azure.

For installation instructions, see RedHat documentation on [installing OpenShift cluster on Azure](#) and [installing an Azure account](#).

Create Azure resource groups

Create at least one Azure resource group.



OpenShift might create its own resource groups. In addition to these, you should also define Azure resource groups. Refer to OpenShift documentation.

You might want to create a platform cluster resource group and a target app OpenShift cluster resource group.

Ensure that you have sufficient IAM permissions

Ensure that you have sufficient IAM roles and permissions that enable you to install a RedHat OpenShift cluster and a NetApp Cloud Manager Connector.

See [Azure credentials and permissions](#).

Configure Azure

Next, configure Azure to create a virtual network, set up compute instances, create an Azure Blob container, create an Azure Container Register (ACR) to host the Astra Control Center images, and push the images to this registry.

Follow the Azure documentation to complete the following steps. See [Installing OpenShift cluster on Azure](#).

1. Create an Azure virtual network.
2. Review the compute instances. This can be a bare metal server or VMs in Azure.
3. If the instance type does not already match the Astra minimum resource requirements for master and worker nodes, change the instance type in Azure to meet the Astra requirements. See [Astra Control Center requirements](#).
4. Create at least one Azure Blob container to store your backups.

5. Create a storage account. You will need a storage account to create a container to be used as a bucket in Astra Control Center.
6. Create a secret, which is required for bucket access.
7. Create an Azure Container Registry (ACR) to host all the Astra Control Center images.
8. Set up ACR access for Docker push/pull all the Astra Control Center images.
9. Push the ACC images to this registry by entering the following script:

```
az acr login -n <AZ ACR URL/Location>  
This script requires ACC manifest file and your Azure ACR location.
```

Example:

```
manifestfile=astra-control-center-<version>.manifest  
AZ_ACR_REGISTRY=<target image repository>  
ASTRA_REGISTRY=<source ACC image repository>  
  
while IFS= read -r image; do  
    echo "image: $ASTRA_REGISTRY/$image $AZ_ACR_REGISTRY/$image"  
    root_image=${image%:*}  
    echo $root_image  
    docker pull $ASTRA_REGISTRY/$image  
    docker tag $ASTRA_REGISTRY/$image $AZ_ACR_REGISTRY/$image  
    docker push $AZ_ACR_REGISTRY/$image  
done < astra-control-center-22.04.41.manifest
```

10. Set up DNS zones.

Configure NetApp Cloud Manager

Using Cloud Manager, create a workspace, add a connector to Azure, create a working environment, and import the cluster.

Follow the Cloud Manager documentation to complete the following steps. See [Getting started with Cloud Manager in Azure](#).

What you'll need


Access to the Azure account with the required IAM permissions and roles

Steps

1. Add your credentials to Cloud Manager.
2. Add a connector for Azure. See [Cloud Manager policies](#).
 - a. Choose **Azure** as the Provider.
 - b. Enter Azure credentials, including the application ID, client secret, and directory (tenant) ID.


See [Creating a connector in Azure from Cloud Manager](#).

3. Ensure that the connector is running and switch to that connector.

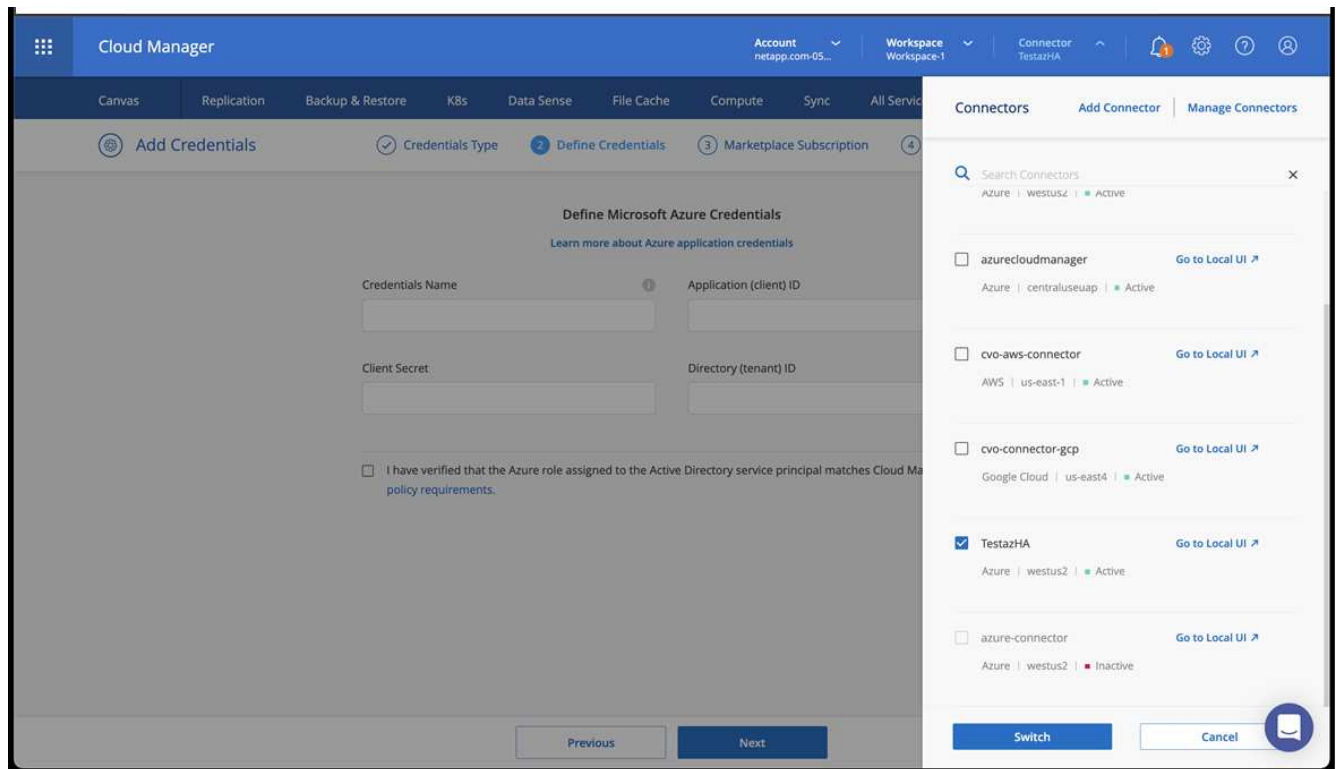

4. Create a working environment for your cloud environment.

- a. Location: "Microsoft Azure".
- b. Type: "Cloud Volumes ONTAP HA".

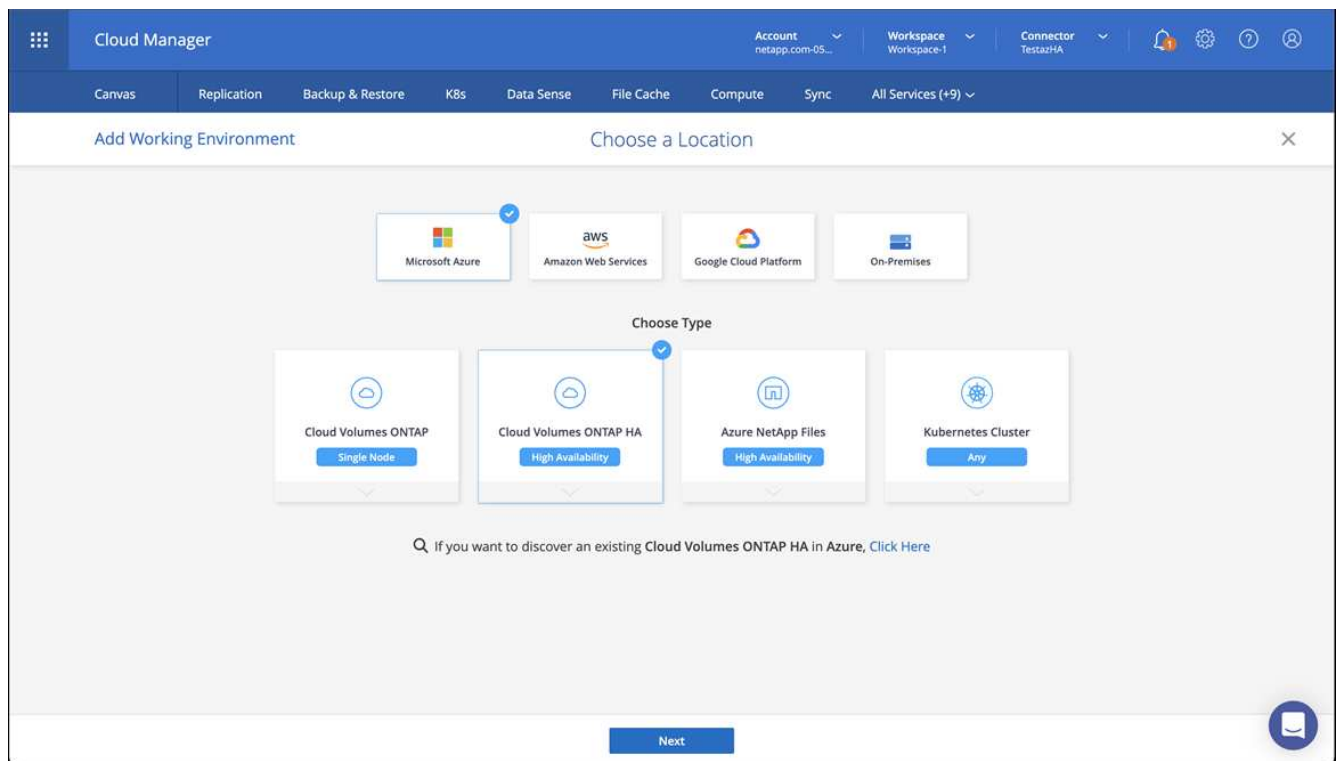

5. Import the OpenShift cluster. The cluster will connect to the working environment you just created.

a. View the NetApp cluster details by selecting **K8s > Cluster list > Cluster Details**.

The screenshot shows the Cloud Manager interface for a cluster named 'targetazacc'. The top navigation bar includes 'Canvas', 'Replication', 'Backup & Restore', 'K8s', 'Data Sense', 'File Cache', 'Compute', 'Sync', and 'All Services (+9)'. The 'K8s' tab is selected. Below the navigation bar, the cluster details are displayed. The status is 'Running', cluster version is 'v1.21.6+bb8d50a', added by 'Import', volumes are '3', VPC is '-', and date added is 'April 14, 2022'. The Trident version is 'v21.04.1' and the provider is 'Microsoft Azure'. Below this, there is a section for '1 Working Environments' with a table showing details for 'testHAenvaz HA'. The table has columns for Name, Provider, Region, Zone, Subnet, and Capacity. The row shows 'testHAenvaz HA' with provider 'Microsoft Azure', region 'westus2', subnet '10.0.0.0/16', and capacity '0.00 used of 500 GB available'. Below this, there is a section for '3 Storage Classes' with a table showing details for 'managed-premium' and 'vsaworkingenvironment-xr1hs5pd-ha-nas'. The 'managed-premium' class has 0 volumes and is provisioned by 'Microsoft Azure'. The 'vsaworkingenvironment-xr1hs5pd-ha-nas' class has 3 volumes and is provisioned by 'NetApp'. The table also shows labels for the storage classes, including 'trident.netapp.io/backend=Vsaworkingenvironment-xr1hs5pd-ha', 'trident.netapp.io/ha=true', and 'trident.netapp.io/protocol=NAS'.

b. In the upper right corner, note the Trident version.

c. Note the Cloud Volumes ONTAP cluster storage classes showing NetApp as the provisioner.

This imports your Red Hat OpenShift cluster and assigns a default storage class. You select the storage class.

Trident is automatically installed as part of the import and discovery process.

6. Note all the persistent volumes and volumes in this Cloud Volumes ONTAP deployment.

7. Cloud Volumes ONTAP can operate as a single node or in High Availability. If HA is enabled, note the HA status and node deployment status running in Azure.

Install and configure Astra Control Center

Install Astra Control Center with the standard [installation instructions](#).

Using Astra Control Center, add an Azure bucket. See [Set up Astra Control Center and add buckets](#).

Copyright information

Copyright © 2024 NetApp, Inc. All Rights Reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

LIMITED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (b)(3) of the Rights in Technical Data -Noncommercial Items at DFARS 252.227-7013 (FEB 2014) and FAR 52.227-19 (DEC 2007).

Data contained herein pertains to a commercial product and/or commercial service (as defined in FAR 2.101) and is proprietary to NetApp, Inc. All NetApp technical data and computer software provided under this Agreement is commercial in nature and developed solely at private expense. The U.S. Government has a non-exclusive, non-transferrable, nonsublicensable, worldwide, limited irrevocable license to use the Data only in connection with and in support of the U.S. Government contract under which the Data was delivered. Except as provided herein, the Data may not be used, disclosed, reproduced, modified, performed, or displayed without the prior written approval of NetApp, Inc. United States Government license rights for the Department of Defense are limited to those rights identified in DFARS clause 252.227-7015(b) (FEB 2014).

Trademark information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.