



參考資料 Cloud Backup

NetApp
July 19, 2022

This PDF was generated from <https://docs.netapp.com/zh-tw/cloud-manager-backup-restore/gcp/reference-aws-backup-tiers.html> on July 19, 2022. Always check docs.netapp.com for the latest.

目錄

| | |
|---------------------------|---|
| 參考資料 | 1 |
| AWS S3歸檔儲存類別並還原擷取時間 | 1 |
| Azure歸檔層與還原擷取時間 | 2 |
| 跨帳戶和跨區域組態 | 3 |

參考資料

AWS S3歸檔儲存類別並還原擷取時間

Cloud Backup可支援兩個S3歸檔儲存類別和大部分地區。

支援的S3歸檔儲存類別、適用於雲端備份

一開始建立備份檔案時、會將其儲存在S3_Standard_儲存設備中。此階層已最佳化、可儲存不常存取的資料、但也可讓您立即存取。30天之後、備份會轉換至S3_Standard-in頻繁存取_儲存類別、以節省成本。

如果您的來源叢集執行ONTAP 的是Estrs9.10.1或更新版本、您可以選擇在特定天數（通常超過30天）之後、將備份分層至_S3 Glacier Deep Archive_或_S3儲存設備、以進一步最佳化成本。這些階層中的資料無法在需要時立即存取、而且需要較高的擷取成本、因此您需要考量從這些歸檔備份檔案還原資料的頻率。請參閱相關章節[從歸檔儲存設備還原資料](#)。

請注意、當您使用此類型的生命週期規則設定Cloud Backup時、在AWS帳戶中設定儲存庫時、不得設定任何生命週期規則。

["瞭解 S3 儲存課程"](#)。

從歸檔儲存設備還原資料

雖然在歸檔儲存設備中儲存較舊的備份檔案比標準或標準IA儲存設備便宜得多、但從歸檔儲存設備中的備份檔案存取資料以進行還原作業需要較長的時間、而且成本較高。

從Amazon S3 Glacier和Amazon S3 Glacier Deep歸檔還原資料的成本為何？

從Amazon S3 Glacier擷取資料時、您可以選擇3項還原優先順序、從Amazon S3 Glacier Deep歸檔擷取資料時、可選擇2項還原優先順序。S3 Glacier Deep歸檔成本低於S3 Glacier：

| 歸檔層 | 還原優先順序與成本 | | |
|----------------------------|-------------|---------------|-------------|
| | 高 | * 標準 * | 低 |
| * S3 Glacier * | 擷取速度最快、成本最高 | 較慢的擷取速度、較低的成本 | 擷取速度最慢、成本最低 |
| * S3 Glacier Deep Archive* | | 更快的擷取速度、更高的成本 | 擷取速度較慢、成本最低 |

每種方法都有不同的每GB擷取費用和每個要求的費用。如需AWS區域的S3 Glacier詳細定價資訊、請參閱["Amazon S3定價頁面"](#)。

還原在Amazon S3 Glacier中歸檔的物件需要多久時間？

共有2個部分可構成總還原時間：

- 擷取時間：從歸檔中擷取備份檔案並將其置於標準儲存設備的時間。這有時稱為「補水」時間。擷取時間會因您選擇的還原優先順序而有所不同。

| 歸檔層 | 還原優先順序與擷取時間 | | |
|----------------------------|-------------|--------|--------|
| | 高 | * 標準 * | 低 |
| * S3 Glacier * | 3至5分鐘 | 3至5小時 | 5至12小時 |
| * S3 Glacier Deep Archive* | | 12小時 | 48小時 |

- 還原時間：從標準儲存設備中的備份檔案還原資料的時間。這一次與一般直接從標準儲存設備進行還原作業（不使用歸檔層時）並無不同。

如需Amazon S3 Glacier和S3 Glacier Deep Archive擷取選項的詳細資訊、請參閱 ["關於這些儲存類別的Amazon常見問題集"](#)。

Azure歸檔層與還原擷取時間

Cloud Backup支援一個Azure歸檔存取層、以及大部分地區。

支援的Azure Blob雲端備份存取層

一開始建立備份檔案時、檔案會儲存在_cool存取層。此階層已最佳化、可儲存不常存取的資料、但需要時、可立即存取。

如果您的來源叢集執行ONTAP 的是Estrs9.10.1或更新版本、您可以選擇在特定天數（通常超過30天）之後、將備份從_cool_分層至_Azure Archive_儲存設備、以進一步最佳化成本。此層級中的資料無法在需要時立即存取、而且需要較高的擷取成本、因此您必須考慮從這些歸檔備份檔案還原資料的頻率。請參閱下一節關於 [從歸檔儲存設備還原資料](#)。

請注意、當您使用此類型的生命週期規則設定Cloud Backup時、在Azure帳戶中設定容器時、不得設定任何生命週期規則。

["瞭解Azure Blob存取層級"](#)。

從歸檔儲存設備還原資料

雖然在歸檔儲存設備中儲存較舊的備份檔案比儲存設備便宜得多、但從Azure歸檔中的備份檔案存取資料以進行還原作業需要較長的時間、而且成本較高。

從**Azure**歸檔還原資料需要多少成本？

從Azure歸檔擷取資料時、您可以選擇兩種還原優先順序：

- 高：擷取速度最快、成本更高
- 標準：擷取速度較慢、成本較低

每種方法都有不同的每GB擷取費用和每個要求的費用。如需Azure區域的Azure歸檔詳細定價資訊、請參閱 ["Azure定價頁面"](#)。

還原在**Azure**歸檔中歸檔的資料需要多久時間？

還原時間由兩部分組成：

- 擷取時間：從Azure歸檔中擷取歸檔備份檔案、並將其置於冷卻儲存設備的時間。這有時稱為「補水」時

間。擷取時間會因您選擇的還原優先順序而有所不同：

- 高：< 1小時
- 標準：< 15小時
- 還原時間：從冷卻儲存設備中的備份檔案還原資料的時間。這一次與一般直接從冷卻儲存設備進行還原作業（不使用歸檔層時）並無不同。

如需Azure歸檔擷取選項的詳細資訊、請參閱 ["本Azure常見問題集"](#)。

跨帳戶和跨區域組態

這些主題說明如何在使用不同雲端供應商時、設定跨帳戶組態的Cloud Backup。

在AWS中設定多帳戶存取的備份

Cloud Backup可讓您在AWS帳戶中建立備份檔案、而非來源Cloud Volumes ONTAP 支援區所在的位置。這兩個帳戶可能與Cloud Manager Connector所在的帳戶不同。

只有在您需要時、才需要執行這些步驟 ["將Cloud Volumes ONTAP 不支援的資料備份至Amazon S3"](#)。

請依照下列步驟以這種方式設定組態。

設定帳戶之間的**VPC**對等關係

1. 登入第二個帳戶並建立對等連線：
 - a. 選取本機VPC：選取第二個帳戶的VPC。
 - b. 選取另一個VPC：輸入第一個帳戶的帳戶ID。
 - c. 選取Cloud Manager Connector執行的區域。在此測試設定中、兩個帳戶都在同一個地區執行。
 - d. VPC ID：登入第一個帳戶、然後輸入接收者VPC ID。這是Cloud Manager Connector的VPC ID。

aws Services ▾

Peering Connections > Create Peering Connection

Create Peering Connection

Peering connection name tag ⓘ

Select a local VPC to peer with

VPC (Requester)* ↕

| CIDRs | CIDR | Status | Status Reason |
|-------|-------------|--------------|---------------|
| | 10.0.0.0/16 | ● associated | |

Select another VPC to peer with

Account ☐ My account ☒ Another account

Account ID*

Region ☒ This region (us-east-1) ☐ Another Region

VPC ID (Accepter)*

隨即顯示「成功」對話方塊。


Success

A VPC peering connection (pcx-049758069d9b7c140) has been requested.
The owner of **vpc-116d9174** must accept the peering connection.

| | | | |
|-----------------------------|-----------------------------|----------------------------|--------------|
| Requester VPC owner | 733004784675 (This account) | Accepter VPC owner | 464262061435 |
| Requester VPC ID | vpc-82f55afa | Accepter VPC ID | vpc-116d9174 |
| Requester VPC Region | us-east-1 | Accepter VPC Region | us-east-1 |
| Requester VPC CIDRs | 10.0.0.0/16 | Accepter VPC CIDRs | - |

對等連線的狀態顯示為「等待接受」。

| | Name | Peering Connection | Status | Requester VPC | Accepter VPC | Requester CIDRs | Accepter CIDRs | Requester Owner | Accepter Owner |
|-------------------------------------|-----------------|-----------------------|----------------------------------------------------------|----------------------|----------------------|-----------------|----------------|-----------------|----------------|
| <input checked="" type="checkbox"/> | cbs-multi-ac... | pcx-049758069d9b7c140 | ● Pending Acceptance | vpc-82f55afa VP... | vpc-116d9174 | 10.0.0.0/16 | - | 733004784675 | 464262061435 |
| <input type="checkbox"/> | cbs-multi-peer | pcx-05f2d310cb7f... | ● Deleted | vpc-82f55afa VP... | vpc-116d9174 | - | - | 733004784675 | 464262061435 |
| <input type="checkbox"/> | New_Peering | pcx-6d55ca04 | ● Active | vpc-b16c90d4 V... | vpc-fc2aa39a De... | 172.31.0.0/16 | 192.168.0.0/16 | 733004784675 | 733004784675 |

2. 登入第一個帳戶並接受對等要求：

| Create Peering Connection | | Actions | | | | | | | |
|---------------------------|--|---------|--|--|--|--|--|--|--|
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |
| | | | | | | | | | |

Accept VPC Peering Connection Request

×

Are you sure you want to accept this VPC peering connection request (pcx-049758069d9b7c140)?

| | | | |
|----------------------|--------------|---------------------|-----------------------------|
| Requester Account ID | 733004784675 | Accepter Account ID | 464262061435 (This account) |
| Requester VPC ID | vpc-82f55afa | Accepter VPC ID | vpc-116d9174 |
| Requester VPC Region | us-east-1 | Accepter VPC Region | us-east-1 |
| Requester VPC CIDR | 10.0.0.0/16 | Accepter VPC CIDR | - |

Cancel

Yes, Accept

a. 按一下「是」。

Accept VPC Peering Connection Request

×

Your VPC Peering Connection has been established.

To send and receive traffic across this VPC peering connection, you must add a route to the peered VPC in one or more of your VPC route tables. [Learn more](#)

[Modify my route tables now](#)

Close

連線現在顯示為「作用中」。我們也新增了名稱標記、以識別稱為「CBS多帳戶」的對等連線。

| | Name | Peering Connection | Status | Requester VPC | Accepter VPC | Requester CIDRs | Accepter CIDRs | Requester Owner | Accepter Owner |
|-------------------------------------|--------------------|-----------------------|--------|---------------------|----------------------|-----------------|----------------|-----------------|----------------|
| <input type="checkbox"/> | | pcx-004715531514cb0d8 | Active | vpc-0647747d M... | vpc-116d9174 | 10.2.0.0/24 | 172.31.0.0/16 | 464262061435 | 464262061435 |
| <input type="checkbox"/> | estycvoconnect | pcx-0305041f9cc2dfbdb | Active | vpc-116d9174 | vpc-445d4f21 | 172.31.0.0/16 | 10.129.0.0/20 | 464262061435 | 759995470648 |
| <input checked="" type="checkbox"/> | cbs-multi-account | pcx-049758069d9b7c140 | Active | vpc-82f55afa | vpc-116d9174 | 10.0.0.0/16 | 172.31.0.0/16 | 733004784675 | 464262061435 |
| <input type="checkbox"/> | hlli-vpc-peer-chen | pcx-0d0e5c7fc4360254d | Active | vpc-0d12df59528f... | vpc-824dc0e4 nf... | 10.0.0.0/24 | 10.20.30.0/24 | 464262061435 | 464262061435 |

a. 重新整理第二個帳戶的對等連線、並注意狀態變更為「作用中」。

| | Name | Peering Connection | Status | Requester VPC | Accepter VPC | Requester CIDRs | Accepter CIDRs | Requester Owner | Accepter Owner |
|-------------------------------------|-------------------|-----------------------|--------|----------------------|----------------------|-----------------|----------------|-----------------|----------------|
| <input checked="" type="checkbox"/> | cbs-multi-account | pcx-049758069d9b7c140 | Active | vpc-82f55afa VP... | vpc-116d9174 | 10.0.0.0/16 | 172.31.0.0/16 | 733004784675 | 464262061435 |
| <input type="checkbox"/> | New_Peering | pcx-6d55ca04 | Active | vpc-b16c90d4 V... | vpc-fc2aa39a De... | 172.31.0.0/16 | 192.168.0.0/16 | 733004784675 | 733004784675 |

將路由新增至兩個帳戶中的路由表

1. 前往VPC >子網路>路由表。

VPC > Subnets > subnet-4d315328

subnet-4d315328 / The Subnet created

Details

| | | | |
|----------------------------------------|--------------------------------|-------------------------------------------------------------------------|----------------------------------|
| Subnet ID subnet-4d315328 | State Available | VPC vpc-116d9174 | IPv4 CIDR 172.31.64.0/20 |
| Available IPv4 addresses 3587 | IPv6 CIDR - | Availability Zone us-east-1a | Availability Zone ID use1-az1 |
| Network border group us-east-1 | Route table rtb-4da55528 | Network ACL acl-c37384a6 | Default subnet Yes |
| Auto-assign public IPv4 address Yes | Auto-assign IPv6 address No | Auto-assign customer-owned IPv4 address No | Customer-owned IPv4 pool - |
| Outpost ID - | Owner 464262061435 | Subnet ARN arn:aws:ec2:us-east-1:464262061435:subnet/subnet-4d315328 | |

[Flow logs](#)
[Route table](#)
[Network ACL](#)
[Sharing](#)
[Tags](#)

2. 按一下「路由」索引標籤。

Route Table ID : rtb-4da55528 Add filter

| Name | Route Table ID | Explicit subnet association | Edge associations | Main | VPC ID | Owner |
|--------------|-----------------|-----------------------------|-------------------|------|--------------|--------------|
| rtb-4da55528 | subnet-4d315328 | - | | Yes | vpc-116d9174 | 464262061435 |

Route Table: rtb-4da55528

[Summary](#)
[Routes](#)
[Subnet Associations](#)
[Edge Associations](#)
[Route Propagation](#)
[Tags](#)

[Edit routes](#)

View All routes

| Destination | Target | Status | Propagated |
|---------------|------------------------|--------|------------|
| 172.31.0.0/16 | local | active | No |
| pl-63a5400a | vpce-098587ed33c36408c | active | No |

3. 按一下*編輯路由*。

Edit routes

| Destination | Target | Status | Propagated |
|---------------|-----------------------|--------|------------|
| 172.31.0.0/16 | local | active | No |
| 10.20.30.0/24 | pcx-0791b47f6f9a27d65 | active | No |
| 10.129.0.0/20 | pcx-0305041f9cc2dfbdb | active | No |

[Add route](#)

* Required

[Cancel](#)
[Save routes](#)

4. 按一下「新增路由」、然後從「目標」下拉式清單中選取「對等連線」、再選取您建立的對等連線。

a. 在目的地中、輸入其他帳戶的子網路CIDR。

Edit routes

| Destination | Target | Status | Propagated |
|---------------|-----------------------|--------|------------|
| 172.31.0.0/16 | local | active | No |
| 10.20.30.0/24 | pcx-0791b47f6f9a27d65 | active | No |
| 10.129.0.0/20 | pcx-0305041f9cc2dfbdb | active | No |
| 10.0.0.0/24 | pcx- | | No |

Add route

* Required

pcx-05f2d310cb7f49843

pcx-004715531514cb0d8

pcx-049758069d9b7c140 cbs-multi-account

pcx-094f9fdb10a2045ea hill-peer-vadim-vpc

pcx-0791b47f6f9a27d65

pcx-0305041f9cc2dfbdb estycvoconnect

Cancel Save routes

b. 按一下「儲存路由」、就會顯示「成功」對話方塊。

Route Tables > Edit routes

Edit routes

✓ Routes successfully edited

Close

在**Cloud Manager**中新增第二個**AWS**帳戶認證資料

1. 新增第二個**AWS**帳戶、例如_Saran - XCP開發_。

Credentials + Add Credentials

3 Credentials

aws Instance Profile Credential Type: AWS Keys

464262061435 AWS Account ID

aws-sub-a2 Subscription

CBS-SR-OCCMOCCM1620912870830... IAM Role

2 Working Environments

aws Saran-XCP-Dev Credential Type: AWS Keys

733004784675 AWS Account ID

aws-sub-a2 Subscription

AKIA2VKT5MQRZRAWW3HI AWS Access Key

0 Working Environments

2. 在「激發Cloud Volumes ONTAP 需求」頁面中、選取新增的認證資料。

Choose an AWS region and then select the working environment that you want to discover.

AWS Region
US East | N. Virginia

aws AWS Credentials

Credential Name

Saran-XCP-Dev | Account ID: 733004784675

Instance Profile | Account ID: 464262061435

To add new AWS credentials, go to the Credentials settings.

Apply Cancel

3. 選取Cloud Volumes ONTAP 您要從第二個帳戶探索的這個系統。您也可以在Cloud Volumes ONTAP 第二個帳戶中部署新的更新系統。

Add an Existing Cloud Volumes ONTAP Region

↑ Previous Step This working environment will be created in Cloud Provider Account: **Saran-XCP-Dev** | Account ID: 733004784675 | [Switch Account](#)

Choose an AWS region and then select the working environment that you want to discover.

AWS Region
US East | N. Virginia

Cloud Volumes ONTAP instances found

| Name | VPC Name | Availability Zone | Subnet Id | Cloud Formation Name | Cluster Address | Type |
|-----------------|-------------|-------------------|-----------------|----------------------|---------------------------|------------------------|
| cbscv001 | VPC-NAT | us-east-1f | subnet-68e8d464 | cbscv001 | 10.0.0.80 | Cloud Volumes ONTAP |
| testbyolliraz | VPC for VSA | us-east-1a | subnet-c1d99699 | testbyolliraz | 172.31.5.142 | Cloud Volumes ONTAP |
| ldanAwsHa991001 | VPC for VSA | us-east-1a | subnet-c1d99699 | ldanAwsHa991001 | 172.31.5.234,172.31.5.110 | HA Cloud Volumes ONTAP |

Continue

第二個帳戶的這個系統現在會新增至雲端管理程式、而Cloud Manager則是以不同的帳戶執行。Cloud Volumes ONTAP



在其他**AWS**帳戶中啟用備份

1. 在Cloud Manager中、為Cloud Volumes ONTAP 第一個帳戶中執行的作業系統啟用備份、但選取第二個帳戶作為建立備份檔案的位置。



2. 然後選取備份原則和您要備份的磁碟區、Cloud Backup會嘗試在選取的帳戶中建立新的儲存區。


不過、將儲存庫新增Cloud Volumes ONTAP 至支援庫系統將會失敗、因為Cloud Backup會使用執行個體設定檔來新增儲存庫、而Cloud Manager執行個體設定檔則無法存取第二個帳戶中的資源。

3. 取得Cloud Volumes ONTAP 適用於此系統的工作環境ID。




Cloud Backup會以「NetApp-Backup」開頭建立每個儲存區、並包含工作環境ID、例如：「87ULeA10」

- 在EC2入口網站中、前往S3搜尋以「87uLeA10」結尾的儲存區、您會看到儲存區名稱顯示為「NetApp-backup-vsa87uLeA10」。

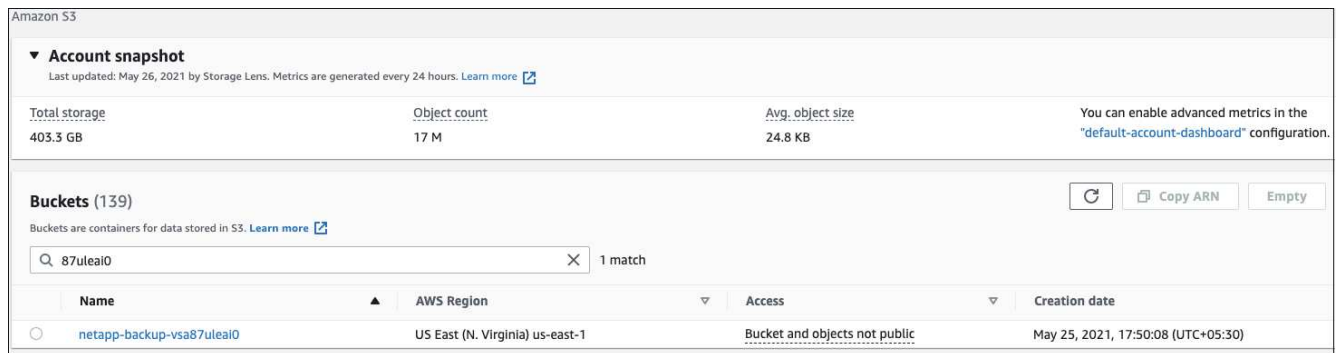

- 按一下儲存庫、然後按一下「權限」索引標籤、再按一下「儲存庫原則」區段中的「編輯」。

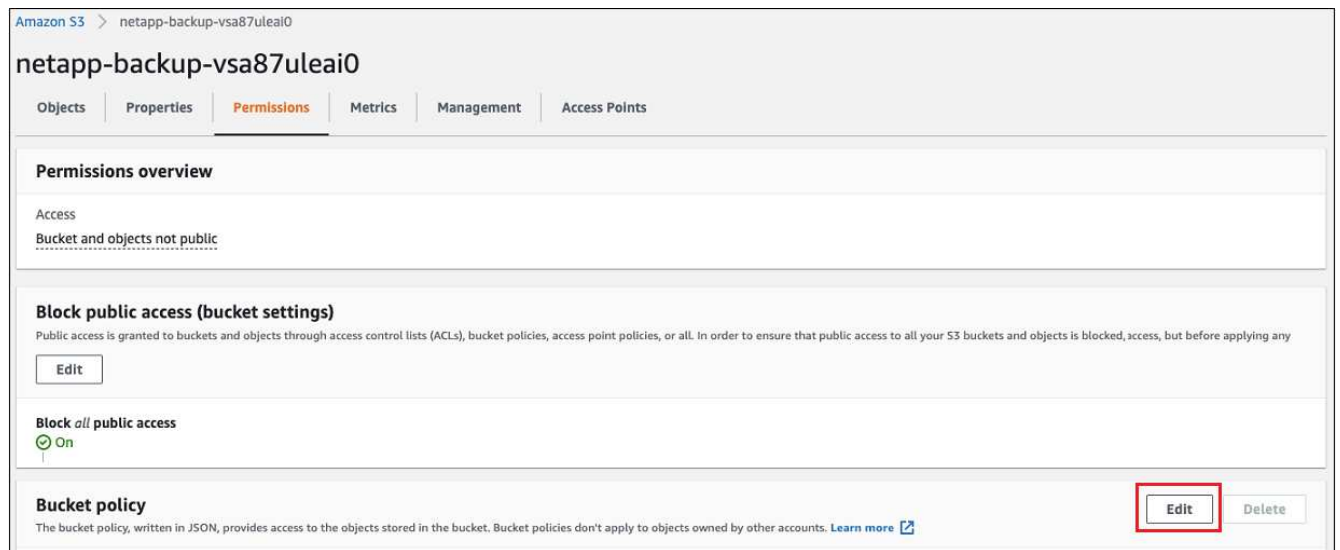

- 為新建立的儲存庫新增儲存庫原則、以提供Cloud Manager AWS帳戶的存取權、然後儲存變更。

```
{
  "Version": "2012-10-17",
  "Statement": [
    {
      "Sid": "PublicRead",
      "Effect": "Allow",
      "Principal": {
        "AWS": "arn:aws:iam::464262061435:root"
      },
      "Action": [
        "s3:ListBucket",
        "s3:GetBucketLocation",
        "s3:GetObject",
        "s3:PutObject",
        "s3:DeleteObject"
      ],
      "Resource": [
        "arn:aws:s3:::netapp-backup-vsa87uleai0",
        "arn:aws:s3:::netapp-backup-vsa87uleai0/*"
      ]
    }
  ]
}
```

請注意、「AWS」：「arn:aws:iam::464262061435:root」可讓帳戶464262061435中的所有資源都能完整存取此儲存區。如果您想要將其縮減為特定角色、層級、可以使用特定角色來更新原則。如果您要新增個別角色、請務必同時新增occm角色、否則Cloud Backup UI不會更新備份。

例如：「AWS」：「arn:aws:iam::464262061435:role / CVO執行個體設定檔版本10-d8e-lamInstanceROE-IKJPJ1HC2E7R」

7. 請重試啟用Cloud Volumes ONTAP 支援整個系統的Cloud Backup、這次應該會成功。

在Azure中設定多帳戶存取的備份

Cloud Backup可讓您在Azure帳戶中建立備份檔案、而該帳戶與來源Cloud Volumes ONTAP 的支援區不同。這兩個帳戶可能與Cloud Manager Connector所在的帳戶不同。

只有在您需要時、才需要執行這些步驟 ["將Cloud Volumes ONTAP 不支援的資料備份到Azure Blob儲存設備"](#)。

只要遵循下列步驟、就能以這種方式設定組態。

在帳戶之間設定vnet對等關係

請注意、如果您想要Cloud Manager在Cloud Volumes ONTAP 不同的帳戶/地區管理您的不一致系統、則必須設定vnet對等關係。儲存帳戶連線不需要vnet對等。

1. 登入Azure入口網站、然後從家中選取「Virtual Networks（虛擬網路）」。
2. 選取您要作為訂閱1使用的訂閱、然後按一下要設定對等的vnet。

Home > Virtual networks

NetApp HCL (netapphcl.onmicrosoft.com)

+ New Manage view Refresh Export to CSV Open query Assign tags Feedback

Filter for any field... Subscription == OCCM Dev Resource group == all Location == all Add filter

Showing 1 to 60 of 60 records.

| Name ↑↓ | Resource group ↑↓ | Location ↑↓ |
|-------------------------------------|-------------------------------|---------------------|
| <input type="checkbox"/> cbsnetwork | occm_group_eastasia | East Asia |
| <input type="checkbox"/> Vnet1 | occm_group_australiaeast | Australia East |
| <input type="checkbox"/> Vnet1 | occm_group_australiasoutheast | Australia Southeast |

3. 選取「* cbsnetwork*」、然後從左側面板按一下「服務」、再按一下「新增」。

Subscription * ⓘ

OCCM Automation

Virtual network *

cbse2evnet

Traffic to remote virtual network ⓘ

☒ Allow (default)

☐ Block all traffic to the remote virtual network

Traffic forwarded from remote virtual network ⓘ

☒ Allow (default)

☐ Block traffic that originates from outside this virtual network

Virtual network gateway or Route Server ⓘ

☐ Use this virtual network's gateway or Route Server

☐ Use the remote virtual network's gateway or Route Server

☒ None (default)

Add

4. 在對等頁面上輸入下列資訊、然後按一下「新增」。
 - 此網路的對等連結名稱：您可以指定任何名稱來識別對等連線。
 - 遠端虛擬網路對等連結名稱：輸入名稱以識別遠端Vnet。
 - 將所有選取項目保留為預設值。

- 在「訂購」下、選取「訂購2」。
- 虛擬網路、請在訂購2中選取您要設定對等的虛擬網路。

cbsnetwork | Peerings Virtual network

Search (Cmd+/) << + Add Refresh

Filter by name...

| Name | Peering status | Peer |
|------------|----------------|------------|
| cbsnetwork | Connected | cbse2evnet |

Navigation menu (left): Overview, Activity log, Access control (IAM), Tags, Diagnose and solve problems, Settings (Address space, Connected devices, Subnets, DDoS protection, Firewall, Security, DNS servers, **Peerings**).

5. 在訂購2 vnet中執行相同步驟、並指定訂購1的訂閱和遠端vnet詳細資料。

Subscription * ⓘ

OCCM Dev

Virtual network *

cbsnetwork

Traffic to remote virtual network ⓘ

☒ Allow (default)

☐ Block all traffic to the remote virtual network

Traffic forwarded from remote virtual network ⓘ

☒ Allow (default)

☐ Block traffic that originates from outside this virtual network

Virtual network gateway or Route Server ⓘ

☐ Use this virtual network's gateway or Route Server

☐ Use the remote virtual network's gateway or Route Server

☒ None (default)

Add

系統會新增對等設定。

cbse2evnet | Peerings

Virtual network

Search (Cmd+ /)

<< + Add ↺ Refresh

Overview

Activity log

Access control (IAM)

Tags

Diagnose and solve problems

Settings

Address space

Connected devices

Subnets

DDoS protection

Firewall

Security

DNS servers

Peerings

Filter by name...

| Name | Peering status | Peer |
|----------------|----------------|------------|
| cbsnetworkpeer | Connected | cbsnetwork |

為儲存帳戶建立私有端點

現在您需要為儲存帳戶建立私有端點。在此範例中、儲存帳戶是在訂閱1中建立、Cloud Volumes ONTAP 而該系統正在訂閱2中執行。



您需要網路參與者權限才能執行下列動作。


```

{
  "id": "/subscriptions/d333af45-0d07-4154-943dc25fbbce1b18/providers/Microsoft.Authorization/roleDefinitions/4d97b98b-1d4f-4787-a291-c67834d212e7",
  "properties": {
    "roleName": "Network Contributor",
    "description": "Lets you manage networks, but not access to them.",
    "assignableScopes": [
      "/"
    ],
    "permissions": [
      {
        "actions": [
          "Microsoft.Authorization/*/read",
          "Microsoft.Insights/alertRules/*",
          "Microsoft.Network/*",
          "Microsoft.ResourceHealth/availabilityStatuses/read",
          "Microsoft.Resources/deployments/*",
          "Microsoft.Resources/subscriptions/resourceGroups/read",
          "Microsoft.Support/*"
        ],
        "notActions": [],
        "dataActions": [],
        "notDataActions": []
      }
    ]
  }
}

```

1. 前往儲存帳戶>網路>私有端點連線、然後按一下*+私有端點*。



2. 在Private Endpoint_Basics頁面：

- 選擇訂購2（部署Cloud Manager Connector和Cloud Volumes ONTAP 一套功能完善的系統）和資源群組。
- 輸入端點名稱。
- 選取區域。

Create a private endpoint

1 Basics 2 Resource 3 Configuration 4 Tags 5 Review + create

Use private endpoints to privately connect to a service or resource. Your private endpoint must be in the same region as your virtual network, but can be in a different region from the private link resource that you are connecting to. [Learn more](#)

Project details

Subscription * ① OCCM Dev

Resource group * ① cbsoccmdevco-rg [Create new](#)

Instance details

Name * cbse2e ✓

Region * (Asia Pacific) East Asia

3. 在「資源_」頁面中、選取「目標子資源」做為* blob*。

Create a private endpoint ...

✓ Basics **2 Resource** 3 Configuration 4 Tags 5 Review + create

Private Link offers options to create private endpoints for different Azure resources, like your private link service, a SQL server, or an Azure storage account. Select which resource you would like to connect to using this private endpoint. [Learn more](#)

Subscription OCCM Dev (d333af45-0d07-4154-943d-c25fbbce1b18)

Resource type Microsoft.Storage/storageAccounts

Resource test150521

Target sub-resource * ⓘ blob

4. 在「組態」頁面中：
- 選取虛擬網路和子網路。
 - 按一下「是」選項按鈕以「與私有DNS區域整合」。

Create a private endpoint ...

✓ Basics ✓ Resource **3 Configuration** 4 Tags 5 Review + create

Networking

To deploy the private endpoint, select a virtual network subnet. [Learn more](#)

Virtual network * ⓘ cbsnetwork

Subnet * ⓘ default (10.2.0.0/24)

i If you have a network security group (NSG) enabled for the subnet above, it will be disabled for private endpoints on this subnet only. Other resources on the subnet will still have NSG enforcement.

Private DNS integration

To connect privately with your private endpoint, you need a DNS record. We recommend that you integrate your private endpoint with a private DNS zone. You can also utilize your own DNS servers or create DNS records using the host files on your virtual machines. [Learn more](#)

Integrate with private DNS zone ☒ Yes ☐ No

| Configuration name | Subscription | Private DNS zone |
|---------------------------|--------------|-----------------------------------|
| privatelink-blob-core-... | OCCM Dev | privatelink.blob.core.windows.net |

Review + create < Previous Next : Tags >

5. 在「私有DNS區域」清單中、確定已從正確的「區域」選取「私有區域」、然後按一下「檢閱+建立」。

| Configuration name | Subscription | Private DNS zone |
|---------------------------|--------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| privatelink-blob-core-... | OCCM Dev | privatelink.blob.core.windows.net |
| | | <input type="text" value="Filter private DNS zones"/> <div> <div>occm_group_centralus</div> <div>privatelink.blob.core.windows.net</div> <div>occm_group_eastus</div> <div>privatelink.blob.core.windows.net</div> <div>occm_group_eastus2</div> <div>privatelink.blob.core.windows.net</div> </div> |

現在儲存帳戶（訂閱1）可以存取Cloud Volumes ONTAP 以訂閱2執行的作業系統。

6. 請重試啟用Cloud Volumes ONTAP 支援整個系統的Cloud Backup、這次應該會成功。

版權資訊

Copyright©2022 NetApp、Inc.版權所有。美國印製本文件中版權所涵蓋的任何部分、不得以任何形式或任何方式（包括影印、錄製、在未事先取得版權擁有者書面許可的情況下、在電子擷取系統中進行錄音或儲存。

衍生自受版權保護之NetApp資料的軟體必須遵守下列授權與免責聲明：

本軟體係由NetApp「依現狀」提供、不含任何明示或暗示的保證、包括但不限於適售性及特定用途適用性的暗示保證、特此聲明。在任何情況下、NetApp均不對任何直接、間接、偶發、特殊、示範、或衍生性損害（包括但不限於採購替代商品或服務；使用損失、資料或利潤損失；或業務中斷）、無論是在合約、嚴格責任或侵權行為（包括疏忽或其他）中、無論是因使用本軟體而產生的任何責任理論（包括疏忽或其他）、即使已被告知可能造成此類損害。

NetApp保留隨時變更本文所述之任何產品的權利、恕不另行通知。除非NetApp以書面明確同意、否則NetApp不承擔因使用本文所述產品而產生的任何責任或責任。使用或購買本產品並不代表NetApp擁有任何專利權利、商標權利或任何其他智慧財產權。

本手冊所述產品可能受到一或多個美國國家/地區的保護專利、國外專利或申請中。

限制權利圖例：政府使用、複製或揭露受DFARS 252.277-7103（1988年10月）和FAR 52-227-19（1987年6月）技術資料與電腦軟體權利條款（c）（1）（ii）分段所述限制。

商標資訊

NetApp、NetApp標誌及所列的標章 <http://www.netapp.com/TM> 為NetApp、Inc.的商標。其他公司和產品名稱可能為其各自所有者的商標。