



# **Manage Kubernetes clusters**

## Kubernetes clusters

NetApp  
June 01, 2022

# Table of Contents

- Manage Kubernetes clusters ..... 1
  - Features ..... 1
  - Install Astra Trident. .... 1
  - Manage storage classes ..... 2
  - View persistent volumes. .... 6
  - Remove Kubernetes clusters from the workspace. .... 7
  - Use NetApp cloud data services with Kubernetes clusters ..... 7

# Manage Kubernetes clusters

You can use Cloud Manager to install Astra Trident, configure storage classes, remove clusters, and enable data services.

## Features

After adding Kubernetes clusters to Cloud Manager, you can manage the clusters from the resource page. To open the resource page, double-click the Kubernetes working environment on the Canvas.



From the resource page you can:

- View the Kubernetes cluster status.
- Confirm Astra Trident is installed. See [Install Astra Trident](#).
- Add and remove storage classes. See [Manage storage classes](#).
- View persistent volumes. See [View persistent volumes](#).
- Remove Kubernetes clusters from the workspace. See [Remove clusters](#).
- Activate or view Cloud Backup. See [Use NetApp cloud data services](#).

## Install Astra Trident

After you add a managed-Kubernetes cluster to the Canvas, you can use Cloud Manager to confirm a compatible Astra Trident installation or install Astra Trident. One of the four most recent versions of Astra Trident is required.

To learn more about Astra Trident, see [Astra Trident documentation](#).



If Astra Trident is not installed, or an incompatible version of Astra Trident is installed, the cluster will show there is an action required.

### Steps

1. Double-click the Kubernetes working environment on the Canvas or click **Enter Working Environment**.
  - a. If Astra Trident is not installed, click **Install Trident**.



- b. If a back level version of Astra Trident is installed, [go to the Astra Trident docs for upgrade steps](#).



## Results

The latest version of Astra Trident is installed. You can now add storage classes.

## Manage storage classes

After you add a managed-Kubernetes cluster to the Canvas, you can use Cloud Manager

to manage storage classes.



If no storage class is defined, the cluster will show there is an action required. Double-clicking the cluster on the Canvas will open the action page to add a storage class.

## Add storage class


### Steps

1. From the Canvas, drag and drop the Kubernetes working environment on the Cloud Volumes ONTAP working environment to open the storage class wizard.
2. Provide a name for the storage class, select definition options, and click **Next**.

A screenshot of the 'Storage Class Definition' wizard. At the top, there are two tabs: '1 Storage Class Definitions' (active) and '2 Select Working Environment'. The main heading is 'Storage Class Definition for "Kubernetes Cluster Name"'. Below this is a text input field labeled 'Storage Class Name'. Underneath is a white box containing four rows of options, each with a label and two radio buttons. The first row is 'Storage Class' with 'Block' (selected) and 'Filesystem'. The second row is 'Support Volume Expansion' with 'Yes' (selected) and 'No'. The third row is 'Volume Binding Mode' with 'Immediate' (selected) and 'WaitForFirstConsumer'. The fourth row is 'Set as Default Storage Class' with 'Yes' (selected) and 'No'.


Storage Class Definition	
for "Kubernetes Cluster Name"	
Storage Class Name	<input type="text"/>
Storage Class	<input checked="" type="radio"/> Block <input type="radio"/> Filesystem
Support Volume Expansion	<input checked="" type="radio"/> Yes <input type="radio"/> No
Volume Binding Mode	<input checked="" type="radio"/> Immediate <input type="radio"/> WaitForFirstConsumer
Set as Default Storage Class	<input checked="" type="radio"/> Yes <input type="radio"/> No

3. Select a working environment to connect to the cluster. Click **Add**.

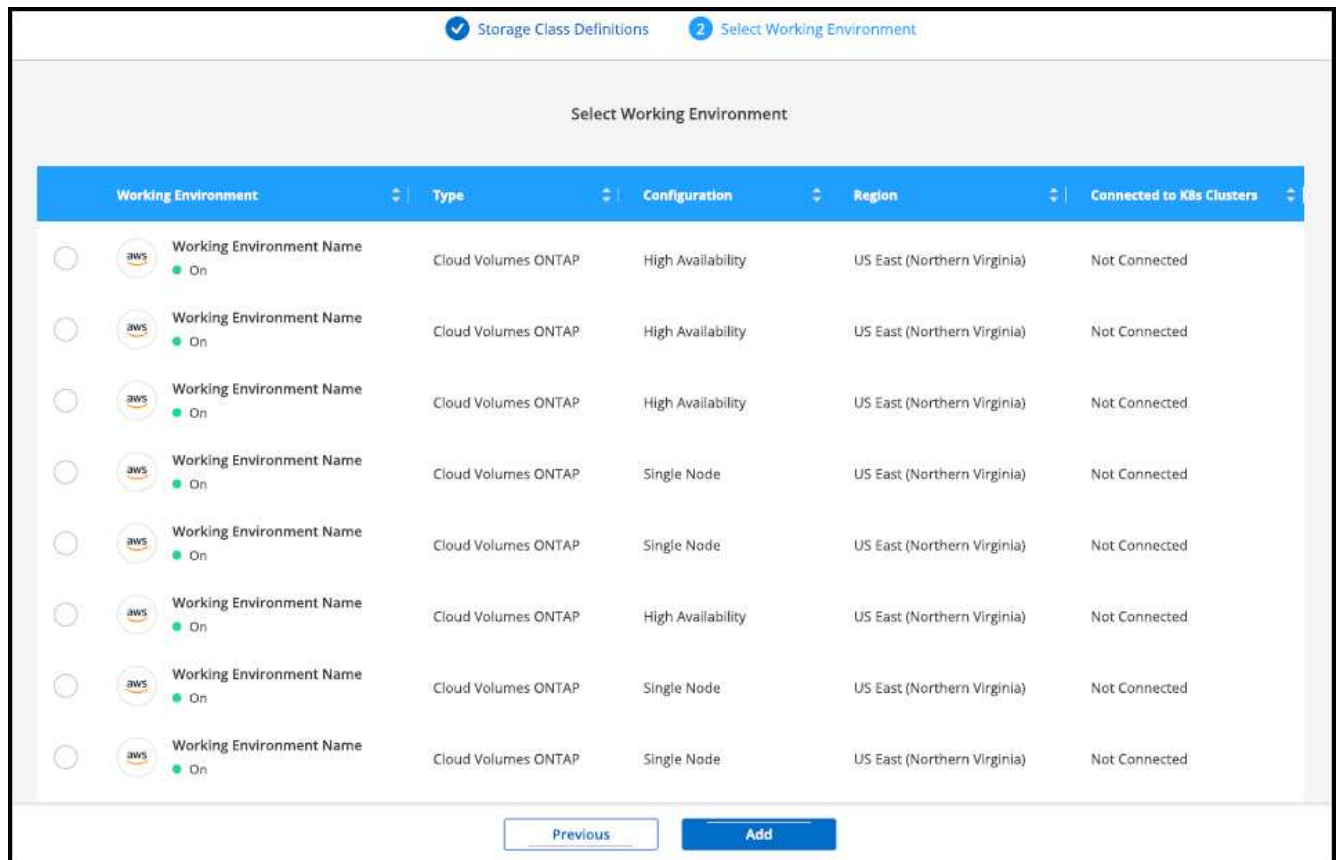

## Results

You can click to view the storage class from the resource page for the Kubernetes cluster.

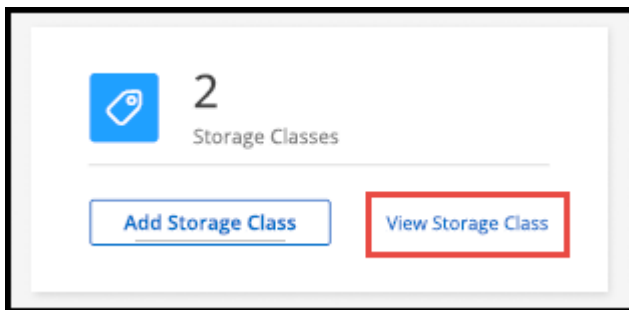

## View working environment details

### Steps


1. Double-click the Kubernetes working environment on the Canvas or click **Enter Working Environment**.
2. Click the **Storage Classes** tab.
3. Click the information icon to view details for the working environment.

### Results


The working environment details panel opens.

2 Storage Classes
Search
Add Storage Classes

Storage Class Name #1
ID: 01234567890123456789
☆ Default Storage Class

 csi.trident.netapp.com Provisioner Name	Nas Storage Class Type (Driver)	WaitForFirstConsumer Volume Binding Mode	True Volume Expansion	<span>Working Environment Name</span> <div> Type: Cloud Volumes ONTAP  Node: High Availability  Provider: AWS  Status : <span>ON</span>  Region: US East (Northern Virginia) </div>
--	------------------------------------	---	--------------------------	---

Storage Class Name #1
ID: 01234567890123456789

 csi.trident.netapp.com Provisioner Name	Nas Storage Class Type (Driver)	WaitForFirstConsumer Volume Binding Mode	True Volume Expansion	
--	------------------------------------	---	--------------------------	--

## Set default storage class

### Steps


1. Double-click the Kubernetes working environment on the Canvas or click **Enter Working Environment**.
2. Click the **Storage Classes** tab.
3. Click the action menu for the storage class and click **Set as Default**.



### Results

The selected storage class is set as the default.

Storage Class Name #2
ID: 01234567890123456789
☆ Default Storage Class

 csi.trident.netapp.com Provisioner Name	Nas Storage Class Type (Driver)	WaitForFirstConsumer Volume Binding Mode	True Volume Expansion	<span>Working Environment Name</span> Attached Working Environment
--	------------------------------------	---	--------------------------	---

## Remove storage class

### Steps

1. Double-click the Kubernetes working environment on the Canvas or click **Enter Working Environment**.
2. Click the **Storage Classes** tab.
3. Click the action menu for the storage class and click **Set as Default**.



- Click **Remove** to confirm removal of the storage class.



## Results

The selected storage class is removed.

## View persistent volumes

After you add a managed-Kubernetes cluster to the Canvas, you can use Cloud Manager to view persistent volumes.


### Steps

- Double-click the Kubernetes working environment on the Canvas or click **Enter Working Environment**.
- Click **View Volumes** from the **Overview** tab or click the **Persistent Volumes** tab. If no persistent volumes are configured, see [Provisioning](#) for details on provisioning volumes in Astra Trident.

## Results

A table of the configured persistent volumes displays.

Volumes Summary



8

Total Volumes

400

GiB


Total Allocated Capacity

201.2

GiB

Total Used Capacity

8 Volumes



Volume Name	Name Space	Storage Class	Access Mode	Allocated Capacity	Used Capacity
<div>Volumes Very Long Name</div> <div><div></div>On</div>	Name Space	Storage Class Name	Access Mode	50 GiB	25.15 GiB
<div>Volumes Very Long Name</div> <div><div></div>On</div>	Name Space	Storage Class Name	Access Mode	50 GiB	25.15 GiB



# Remove Kubernetes clusters from the workspace


After you add a managed-Kubernetes cluster to the Canvas, you can use Cloud Manager to remove clusters from the workspace.

## Steps

1. Double-click the Kubernetes working environment on the Canvas or click **Enter Working Environment**.
2. At the top right of the page, select the actions menu and click **Remove from Workspace**.



3. Click **Remove** to confirm removal of the cluster from the workspace. You can rediscover this cluster at any time.

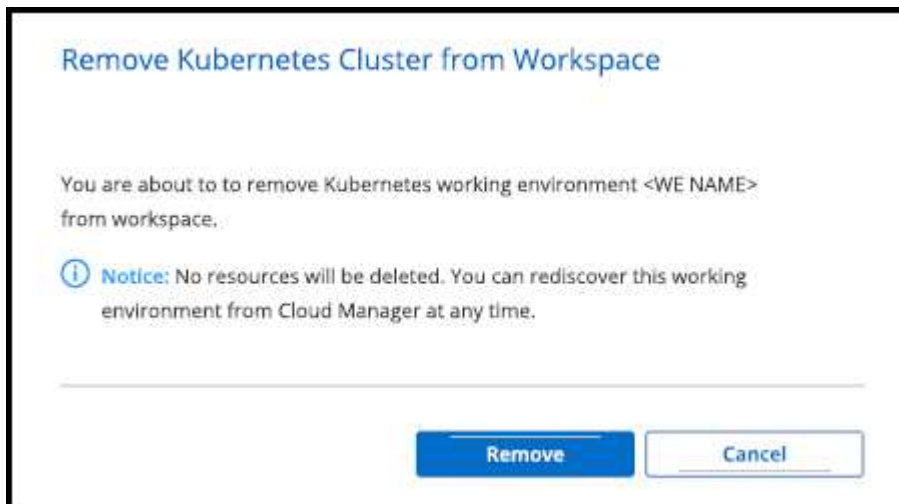

## Results

The Kubernetes cluster is removed from the workspace and is no longer visible on the Canvas.

# Use NetApp cloud data services with Kubernetes clusters

After you add a managed-Kubernetes cluster to the Canvas, you can use NetApp cloud data services for advanced data management.

At this time, Cloud Backup is supported with Kubernetes clusters. You can use Cloud Backup to back up persistent volumes to object storage.

[Learn how to protect your Kubernetes cluster data using Cloud Backup.](#)

1 Selected Kubernetes Clusters

Backup Settings



1

Kubernetes Clusters



5

Protected PVs



97.66 KB

Total Backups Size

## Protected Persistent Volumes Status

5

Healthy Backup

0

Failed Backup

## 5 Backup Jobs



Source K8s Cluster	Source Persistent Volume	Source Namespace	Last Backup	Backup Copies	Backup Status	
eks1 On	pvc-1704aa1f-af1d-49e9-87fd-6edd86125855 Online	default	Nov 25 2021, 14:56:3	2	Enabled	...
eks1 On	pvc-d1f839c1-d932-4f49-b620-33321dbe939e Online	trident	Nov 25 2021, 14:56:3	2	Enabled	...
eks1 On	pvc-f615f0a8-2d5d-44d0-b4e4-f365cc3fb4a6 Online	default	Nov 25 2021, 14:56:3	2	Enabled	...
eks1 On	pvc-1615f0a8-2d5d-44d0-b4e4-f365cc3fb4a6 Online	default	Nov 25 2021, 14:56:3	2	Enabled	...
eks1 On	pvc-05881c70-cf5f-4edc-8537-a0a5ce36f9a1 Online	default	Nov 25 2021, 14:56:3	2	Enabled	...

## Copyright Information

Copyright © 2022 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

## Trademark Information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.