Tiering inactive data from your first cluster to StorageGRID

Cloud Tiering

Ben Cammett
October 07, 2020

This PDF was generated from https://docs.netapp.com/us-en/cloud-tiering/task_tiering_storagegrid.html on March 06, 2021. Always check docs.netapp.com for the latest.

Table of Contents

Tiering inactive data from your first cluster to StorageGRID 1

Tiering inactive data from your first cluster to StorageGRID

After you prepare your environment, just log in to Cloud Tiering and start tiering inactive data from your first cluster.

What you'll need

- To discover the cluster, you'll need the following:
  - The cluster management IP address.
  - The user name and password of an ONTAP account that has administrator-level privileges.

    The Service Connector uses this account to send API operations to the ONTAP cluster.
  - A Service Connector installed in your on-premises network.
- To set up tiering to StorageGRID, you'll need the following:
  - The FQDN of the server.
  - An AWS access key and secret key for an account that has the required S3 permissions.

If you haven't met these requirements, see Preparing to tier data to StorageGRID.

Steps

1. Log in to NetApp Cloud Central.
2. Select the Cloud Tiering service.
3. Click **Let's Start, Discover Your First Cluster**.
4. Complete the steps on the **Discover Cluster** page:
   a. Enter the cluster management IP address and the user name and password of an account that has administrator-level privileges.

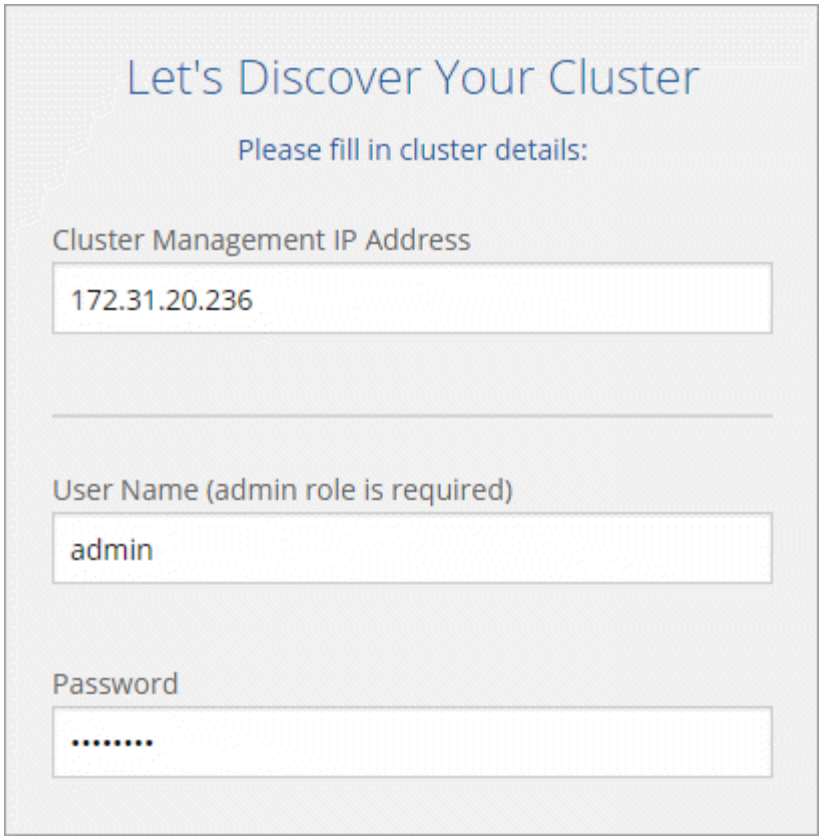

b. Click **Discover Cluster**.

   Cloud Tiering automatically uses the on-premises Service Connector to discover the cluster.

5. Complete the steps on the **Tiering Setup** page:
   a. **Choose your provider**: Select StorageGRID.
   b. **Server**: Enter the FQDN of the StorageGRID server, enter the port that ONTAP should use for HTTPS communication with StorageGRID, and enter the access key and secret key for an AWS account that has the required S3 permissions.
   c. **Bucket**: Add a new bucket or select an existing bucket for the tiered data.
   d. **Cluster Network**: Select the IPspace that ONTAP should use to connect to object storage and click **Continue**.

      Selecting the correct IPspace ensures that Cloud Tiering can set up a connection from ONTAP to your cloud provider's object storage.

      If you haven't reviewed requirements for the IPspace and the associated intercluster LIFs, see ONTAP cluster requirements.

6. Click **Continue** to select the volumes that you want to tier.
7. For each volume, click the icon, select a tiering policy, optionally adjust the cooling days, and click **Apply**.

   Learn about volume tiering policies and cooling days.

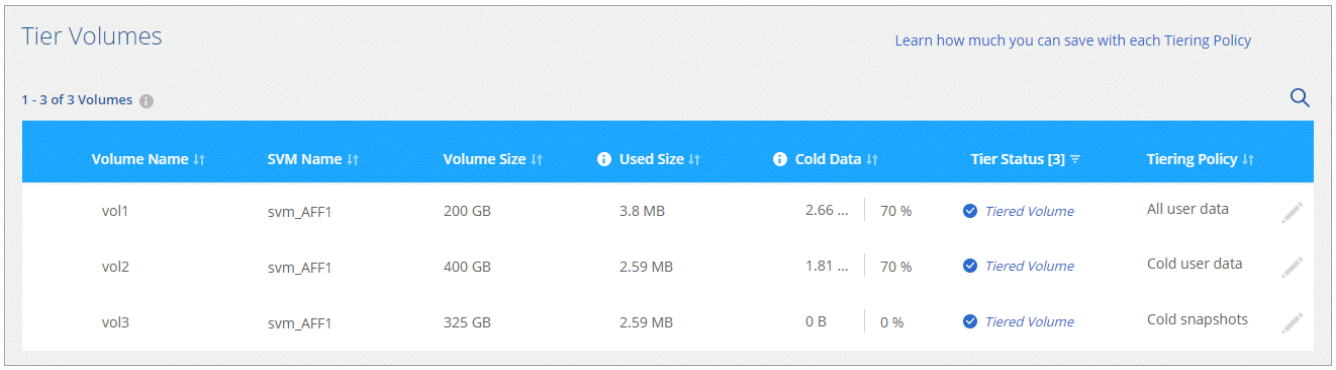

8. When you're done, click **Close**.

Result

You've successfully set up data tiering from volumes on the cluster to StorageGRID.

What's next?

You can add additional clusters or review information about the active and inactive data on the cluster. For details, see Managing data tiering from your clusters.

Copyright Information

Copyright © 2021 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark Information

NETAPP, the NETAPP logo, and the marks listed at http://www.netapp.com/TM are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.