



NetApp Cloud Volumes Service for AWS

AWS Account Setup

Cloud Volumes Team, NetApp
December 2018

Abstract

This document provides instructions to help users set up the initial environment for using NetApp® Cloud Volumes Service for Amazon Web Services (AWS).

TABLE OF CONTENTS

1	Overview	3
2	Requirements	3
3	Workflow Overview.....	3
4	Set Up Cloud Volumes Service for AWS Account.....	4
4.1	Create VPC to Use with Cloud Volumes	5
4.2	Create a Virtual Private Gateway and Attach to Your VPC.....	6
4.3	Create a Subnet for the VPC	7
4.4	Set Up Routes.....	8
4.5	Gather and provide AWS configuration information to NetApp.....	9
4.6	Accept the Direct Connect Virtual Interfaces.....	9
5	Enable AWS Subscription and Cloud Volumes Service	11
5.1	Access AWS Marketplace Listing for Cloud Volumes	11
5.2	Register and Log into NetApp Cloud Central	12
6	Manage Cloud Volumes	13
	Support	13
	Where to Find Additional Information	13
	Version History	14

LIST OF FIGURES

Figure 1)	Workflow diagram: Cloud Volumes Service for AWS account.....	4
Figure 2)	Cloud Volumes Service for AWS.....	4

1 Overview

This document guides users through the required steps to add NetApp Cloud Volumes for an AWS account.

2 Requirements

This section details the requirements to access Cloud Volumes Service for AWS.

Administrative

The following administrative tasks are required to access Cloud Volumes Service for AWS:

- Willingness to accept the NetApp End-User License Agreement (EULA)
Note: This EULA is presented as part of the AWS Marketplace subscription process.
- An active AWS account
Note: The ID for the AWS account is sent to NetApp to enable access to Cloud Volumes Service for AWS in the AWS Marketplace.
Note: In certain circumstances, your AWS Payer ID might be required to subscribe to the Cloud Volumes listing on the AWS Marketplace.

Skills and Knowledge

The following skills and information are required to access Cloud Volumes Service for AWS:

- Access to and knowledge of the AWS Marketplace
- Knowledge of your AWS network and connectivity settings and controls

Compute Resources

The following compute resources are required to access Cloud Volumes Service for AWS:


- A valid AWS subscription (with permissions to subscribe to new Marketplace listings)
Note: All AWS compute and other resources used are the sole responsibility of the user.
- A Virtual Private Cloud (VPC) that has been configured and running prior to the setup of Cloud Volumes Service for AWS
- An Internet browser

3 Workflow Overview

Figure 1 is a high-level workflow diagram illustrating how to set up your Cloud Volumes Service for AWS account, enable the AWS subscription and Cloud Volumes Service for AWS.

For detailed information about on-boarding your Cloud Volumes Service for AWS account, see section 4 through section 6.


Figure 1) Workflow diagram: Cloud Volumes Service for AWS account.

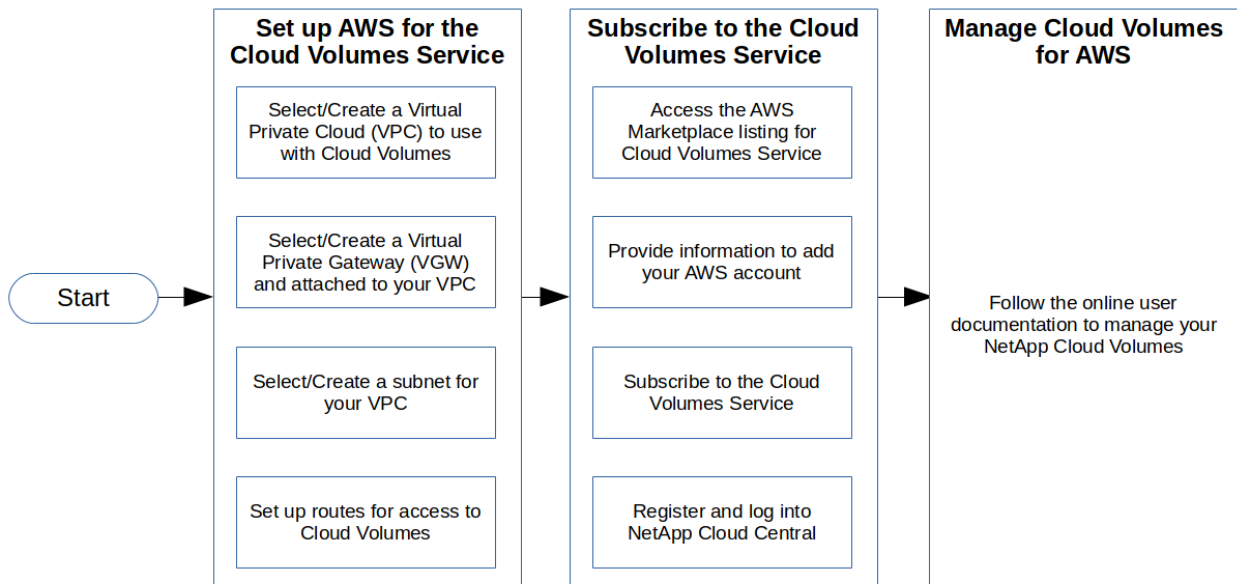

4 Set Up Cloud Volumes Service for AWS Account

Figure 2 illustrates the connectivity and setup for the Cloud Volumes Service for AWS.

Figure 2) Cloud Volumes Service for AWS.

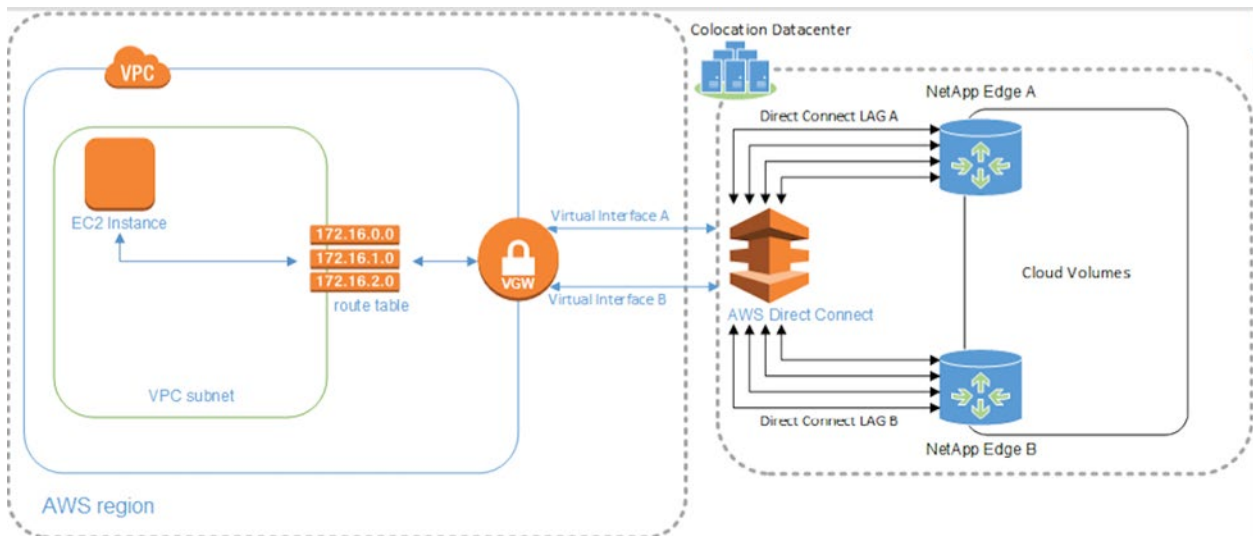

Before you subscribe to NetApp Cloud Volumes Service for AWS, you must complete or verify that your AWS account is correctly configured by completing these tasks:

- Select/create a VPC to use with Cloud Volumes
- Select/create a Virtual Private Gateway (VGW)
- Select/create a subnet for the VPC
- Set up routes to include cloud volumes network


If you already have a VPC and virtual gateway configured, jump to section 4.5.

4.1 Create VPC to Use with Cloud Volumes


It is not mandatory that you create a new VPC; however, you might need it for isolated instances associated with the Cloud Volumes project from work in other VPCs.

To create a VPC to use with Cloud Volumes, complete the following steps:

1. Log in to your AWS account and navigate to the VPC dashboard.

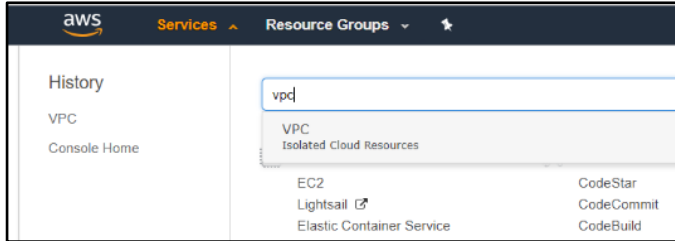

2. Click Your VPCs on the navigation pane to the left. Click Create VPC.

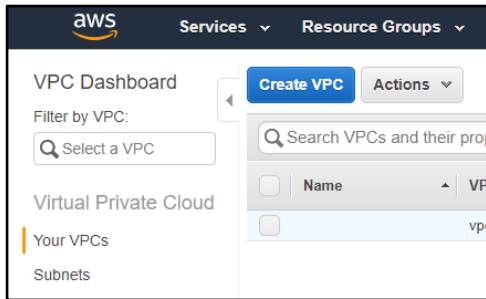

3. On the Create VPC page, complete these tasks:
 - a. Enter a unique name to help you identify this VPC to use for Cloud Volumes.
Enter a private range Classless Inter-Domain Routing (CIDR) block that works for your environment. It doesn't matter what it is, you can select from any private class range. A /24 CIDR block is sufficient. In this example, the CIDR block name is 10.2.0.0/24.
 - b. Click Yes, Create. A new VPC is created.

A screenshot of the 'Create VPC' form in the AWS Management Console. The form has a title bar 'Create VPC' with a close button. Below the title, there is explanatory text about VPCs. The form contains several input fields: 'Name tag' with the value 'MyCloudVolumesVPC', 'IPv4 CIDR block*' with the value '10.2.0.0/24', and 'IPv6 CIDR block*' with the radio button selected for 'No IPv6 CIDR Block'. There is also a 'Tenancy' dropdown menu set to 'Default'. At the bottom right, there are 'Cancel' and 'Yes, Create' buttons.

4.2 Create a Virtual Private Gateway and Attach to Your VPC

The VGW is a network gateway that provides a route to NetApp Cloud Volumes.

To create a VGW and attach it to your VPC, complete the following steps:

1. On the VPC page of the AWS console, select Virtual Private Gateway.
2. At the top of the page, select Create Virtual Private Gateway.
3. Provide an appropriate name tag and click Create Virtual Private Gateway.

Note: NetApp recommends selecting Amazon Default ASN, in which case your VGW will be assigned an ASN of 64512. You can select the Custom ASN option and assign any valid private ASN. Make a note of the ASN as you will need to provide it to the NetApp onboarding team.



Virtual Private Gateways > Create Virtual Private Gateway

Create Virtual Private Gateway


A virtual private gateway is the router on the Amazon side of the VPN tunnel.

Name tag

ASN ☒ Amazon default ASN ☐ Custom ASN

[Cancel](#) [Create Virtual Private Gateway](#)

4. Make a note of the VGW ID and click Close. The new VGW is displayed in the detached state.

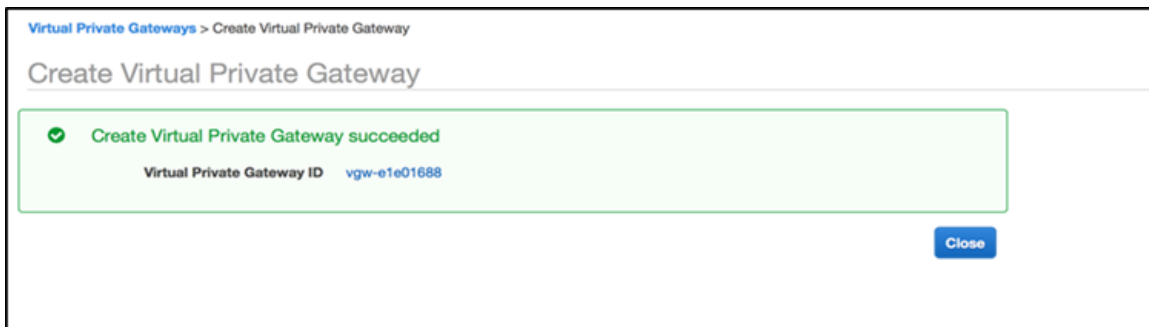

Virtual Private Gateways > Create Virtual Private Gateway

Create Virtual Private Gateway

✔ Create Virtual Private Gateway succeeded

Virtual Private Gateway ID [vgw-e1e01688](#)

[Close](#)

5. Click the button next to the new Virtual Private Gateway and press Actions (above the table).
6. Click Attach to VPC.
7. Select the newly created VPC to attach to the VGW, and then click Yes, Attach.

Note: You are returned to the Virtual Private Gateway page.

Virtual Private Gateways > Attach to VPC

Attach to VPC

Select the VPC to attach to the virtual private gateway.

Virtual Private Gateway Id vgw-04ff225f813de5748

VPC*

vpc-ce62a9a9 MyCloudVolumesVPC

Cancel Yes, Attach

It can take a minute or two for the VGW to transition from the Attaching state to Attached.

Note: Use the Refresh button in the upper-right corner of the page to refresh the status.

4.3 Create a Subnet for the VPC

To create a subnet for the VPC, complete the following steps:

1. On the VPC dashboard, select Subnets from the navigation pane on the left. A list of existing subnets is displayed. Click Create Subnet.
2. On the Create Subnet page, complete these steps:
 - a. Enter an appropriate name tag for your environment.
 - b. Select the newly created VPC.
 - c. Unless you want to select a specific availability zone, leave the No Preference default value and the system will select the availability zone for you.
 - d. Unless you need to divide the VPC into multiple subnets, use the CIDR block for the entire VPC. In this example, the `10.2.0.0/24` CIDR block was used—it represents the entire VPC CIDR block.
 - e. Click Yes, Create. The new subnet will reside in the VPC you selected.

Note: This process can take a few minutes.

Create Subnet

Use the CIDR format to specify your subnet's IP address block (e.g., 10.0.0.0/24). Note that block sizes must be between a /16 netmask and /28 netmask. Also, note that a subnet can be the same size as your VPC. An IPv6 CIDR block must be a /64 CIDR block.

Name tag MyCloudVolumesSubnet ⓘ

VPC vpc-dfc585a4 | MyCloudVolumesVPC ⓘ

VPC CIDRs	CIDR	Status	Status Reason
	10.2.0.0/24	● associated	

Availability Zone No Preference ⓘ

IPv4 CIDR block 10.2.0.0/24 ⓘ


Cancel Yes, Create

4.4 Set Up Routes


To set up routes, complete the following steps:

1. On the VPC dashboard, select Route Table from the navigation pane on the left.


Note: A route table is automatically assigned as part of the VPC creation.

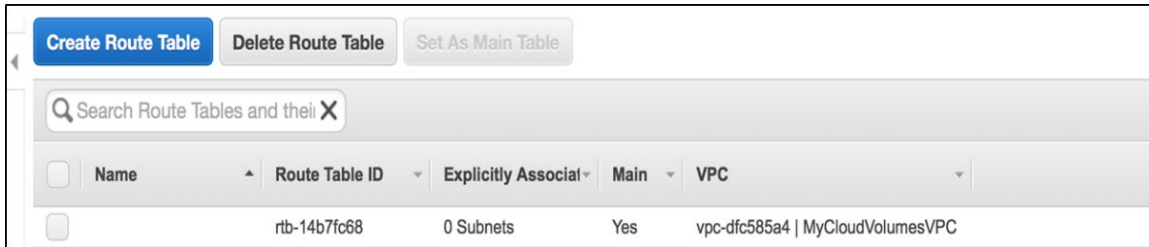


2. Select the Subnet Associations tab and associate the newly created subnet with this route table.

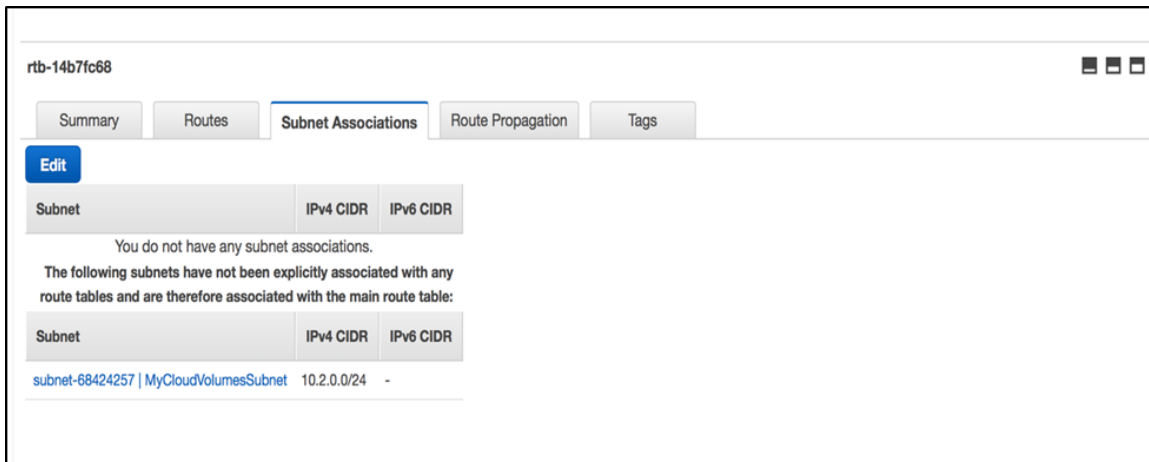

3. Click Save.

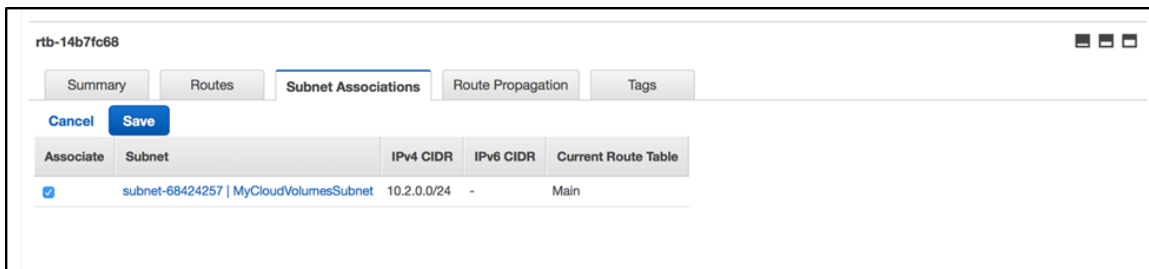

- Optional. Select the Route Propagation tab or configure a static route (refer to section where static route can be viewed/used).
- Optional. The VGW is not currently set to have routes propagated. To enable this setting, click Edit and enable the toggle button to the right of the VGW name.

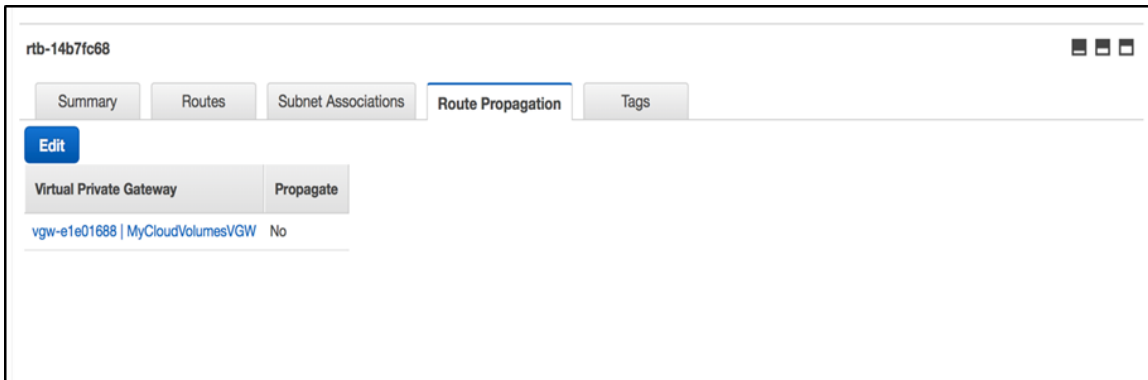

- Click Save.



4.5 Gather AWS configuration information

You are now ready to subscribe to Cloud Volumes in the AWS Marketplace. When subscribing, be prepared to provide the following information:

- AWS account number
- Regions required
- Private network CIDR preference (for example, Class A, B, or C network in RFC 1918)
- Virtual private gateway ASN
- Desired name for the virtual interfaces (for example, NetApp_CVS_XXX; the default names are NetApp-CV-A and NetApp-CV-B)

Note: At this point, you can accept the Direct Connect virtual interfaces created by NetApp.

4.6 Accept the Direct Connect Virtual Interfaces

NetApp provides virtual interfaces for connectivity to the Cloud Volumes Service. These virtual interfaces must be accepted before they can be used.

To accept the virtual interfaces, complete the following steps:

1. From the AWS console for your account, navigate to the Direct Connect service and click Virtual Interfaces.

2 Virtual Interfaces Need to be Accepted
2 virtual interfaces have been created for you by another account, and will not be usable until you accept them.

Actions

Filter: Search for a Virtual Interface X Viewing 2 of 2 Virtual Interfaces

Name	ID	Connection	VLAN	Type	State
NetApp-CV-B	dxvif-fgp80pv8	dxlag-fh4rf40d	1100	private	pending acceptance
NetApp-CV-A	dxvif-ffqulxuv	dxlag-fgbsrp6j	1100	private	pending acceptance

2. Select one of the virtual interfaces and click Accept Virtual Interface.

2 Virtual Interfaces Need to be Accepted
2 virtual interfaces have been created for you by another account, and will not be usable until you accept them.

Actions

Filter: Search for a Virtual Interface X

Name	ID	Connection
<input checked="" type="checkbox"/> NetApp-CV-B	dxvif-fgp80pv8	dxlag-fh4rf40d
<input type="checkbox"/> NetApp-CV-A	dxvif-ffqulxuv	dxlag-fgbsrp6j

NetApp-CV-B


Summary | Peerings

Name	NetApp-CV-B
ID	dxvif-fgp80pv8
AWS Account	436376711722
Type	private
State	pending acceptance
Connection	dxlag-fh4rf40d

Before this virtual interface can be active and used, you must accept it.
☒ I understand that I will be responsible for data transfer charges incurred for this interface.

Accept Virtual Interface Decline Virtual Interface

3. From the drop-down menu, select the virtual private gateway and click Accept.

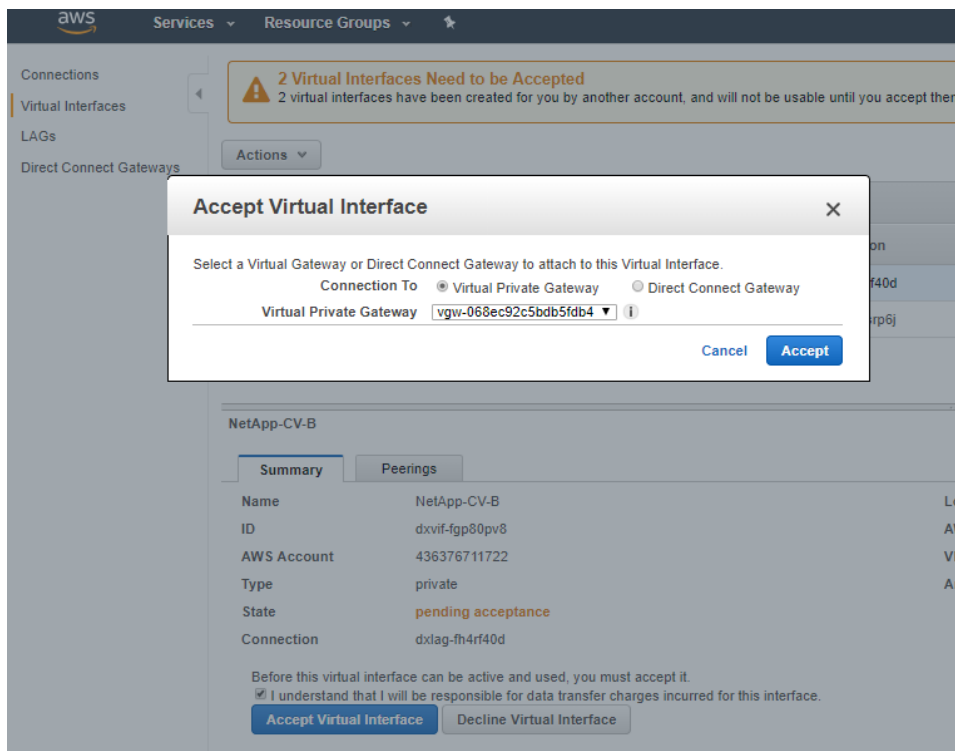

4. Repeat steps 1 through 3 for each interface.
5. The state of the virtual interface initially goes to **down**, changes to **up**, and finally to **available**.
Note: It can take several minutes before the virtual interfaces become available.
6. Verify that the virtual interfaces are available.

Name	ID	Connection	VLAN	Type	State
NetAppCVS-PM-B	dxvif-ffm4ubqv	dxlag-fguxo1ms	1022	private	available
NetAppCVS-PM-A	dxvif-fgbqfox3	dxlag-fg51xgdt	1022	private	available

5 Enable AWS Subscription and Cloud Volumes Service

5.1 Access AWS Marketplace Listing for Cloud Volumes Service

Locate the NetApp Cloud Volumes Service listing on AWS.

Complete the following steps:

1. Go to the [AWS marketplace page](#) and sign in to your AWS account.
2. Type NetApp Cloud Volumes in the search bar to view all NetApp products.
3. Select the “NetApp Cloud Volumes Service for AWS” product.
4. Review the content on that page to fully understand the solutions the product provides, and click on the video and documentation links to identify the prerequisites tasks you must perform before creating your first cloud volume.
5. Click Continue to Subscribe.

- The Contract Signup page is displayed.
- Select the quantity of bundles and then click Create Contract.

Note: Only select the quantity that matches your total terabyte subscription. In this example, a 5TB 30-day trial is a quantity of 1 (1x 5TB).

AMIB SaaS

You are viewing a private offer extended to you by this seller [Switch to Public](#)

Cloud Volumes for AWS Trial Subscription

You currently do not have a contract for this software. If you would like to purchase access, please select the level of access and contract duration below. After creating a contract you will be redirected to the vendor's site to setup and begin using this software.

How many units would you like to add to your contract?
Please conform to any quantity or region guidance from the seller for this product.

Trial Bundle STB

1

How long do you want your contract to run?

☒ 1 month

Automatic Renewal is not offered for this product. Your contract will expire at the duration you select above. Please reach out to the seller with any questions.

For products with multiple tiers or quantifiable units, you may increase the size of your contract after purchase. Changes will be billed on a pro-rata basis.

CREATE CONTRACT

By clicking on this button, you are accepting the terms and conditions of the offer. Your use of this software is subject to the pricing terms, your automatic renewal selection and the seller's End User License Agreement (EULA) and your use of AWS services is subject to the AWS Customer Agreement.

Price today **\$0.00**

This configuration of Cloud Volumes for AWS Trial Subscription includes:

Item	Price
1 Trial Bundle STB	\$0.00

Below are the total costs for each unit type at each duration.

Additional taxes may apply.

Item	1 MONTH
Trial Bundle STB	\$0

[AWS Marketplace on Twitter](#) [AWS Marketplace Blog](#) [RSS Feed](#)

- When the congratulations message is displayed, click Set Up Your Account.

Congratulations! You are now subscribed!

To begin using this software, you will be redirected to the NetApp NFS Hybrid service for AWS (Private Preview) website. Simply click the button below to set up your account and complete your registration. If you are unable to complete your registration, you can always return here through the [Your Software](#) page on AWS Marketplace.


Set Up Your Account

- You will be redirected to the NetApp Cloud Central page. Complete the steps in the next section to register and log into NetApp Cloud Central.

5.2 Register and Log into NetApp Cloud Central

To register and log into NetApp Cloud Central, complete the following steps:

- Go to the NetApp Cloud Central page.
- If you don't have an account, create one now by selecting **Sign Up**.
- Log in using your NetApp Cloud Central credentials.

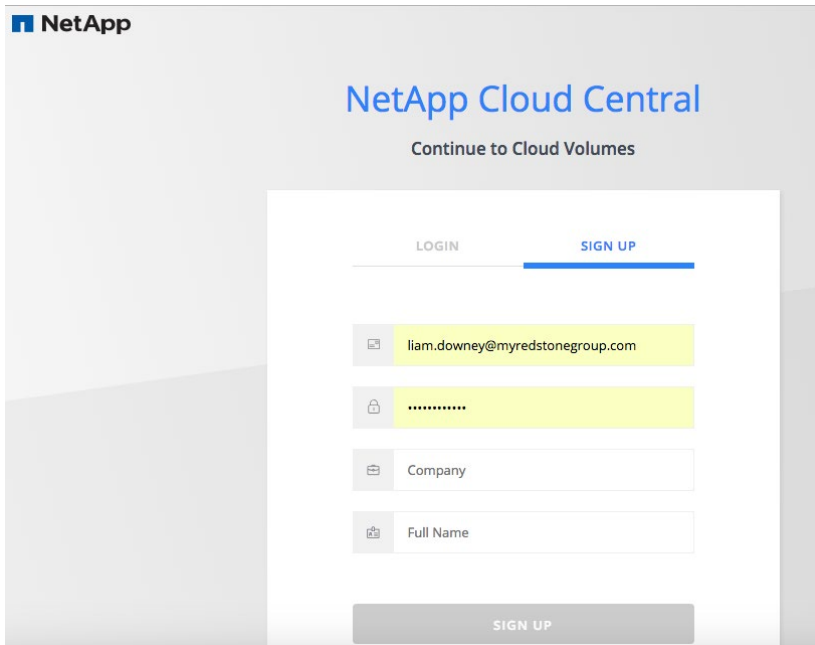

You have completed the initial process for creating Cloud Volumes Service for AWS.

6 Manage Cloud Volumes

To create and manage Cloud Volumes Service for AWS, follow the instructions on [NetApp Cloud Volumes Service for AWS Documentation](#). For example, you can create a cloud volume, mount the volume, and create a NetApp Snapshot™ copy of the volume.

Support

For support information, e-mail aws-bundles-support@netapp.com.

Where to Find Additional Information

To learn more about the information described in this document, refer to the following documents and/or websites:

- NetApp Cloud Volumes product page
<https://www.netapp.com/us/products/cloud-storage/cloud-volumes/index.aspx>
- NetApp Cloud Volumes Service for AWS documentation
https://docs.netapp.com/us-en/cloud_volumes/aws/
- NetApp Product Documentation page
<http://docs.netapp.com>

Version History

Version	Date	Document Version History
Version 1.0	December 2018	Initial release.

Refer to the [Interoperability Matrix Tool \(IMT\)](#) on the NetApp Support site to validate that the exact product and feature versions described in this document are supported for your specific environment. The NetApp IMT defines the product components and versions that can be used to construct configurations that are supported by NetApp. Specific results depend on each customer's installation in accordance with published specifications.

Copyright Information

Copyright © 2018 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means—graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system—without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP "AS IS" AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark Information

NETAPP, the NETAPP logo, and the marks listed at <http://www.netapp.com/TM> are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.