Mounting a cloud volume

Cloud Volumes Service

Julie Chen, Tom Onacki
July 29, 2020

This PDF was generated from https://docs.netapp.com/us-en/cloud_volumes/aws/task_mounting_cloud_volumes_for_aws.html on March 06, 2021. Always check docs.netapp.com for the latest.

Table of Contents

Mounting a cloud volume 1

Mounting a cloud volume

You can mount a cloud volume to your AWS instance. Cloud volumes currently support NFSv3 and NFSv4.1 for Linux and UNIX clients, and SMB 2.1, 3.0, and 3.1.1 for Windows clients.

Note: Please use the highlighted protocol/dialect supported by your client.

Steps

1. Obtain mount instructions for the volume you created by clicking the blue question mark (?) at the end of the Export Paths field next to the volume name.

   When you hover over the question mark, it displays **Show mount instructions**.

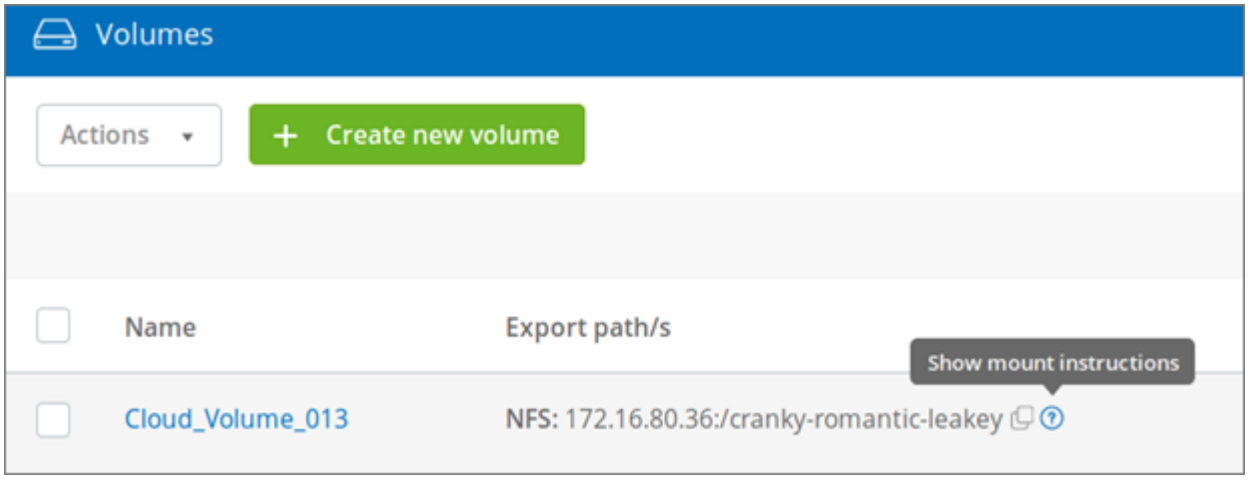

2. Click the question mark to display the mount instructions.

   NFS example:

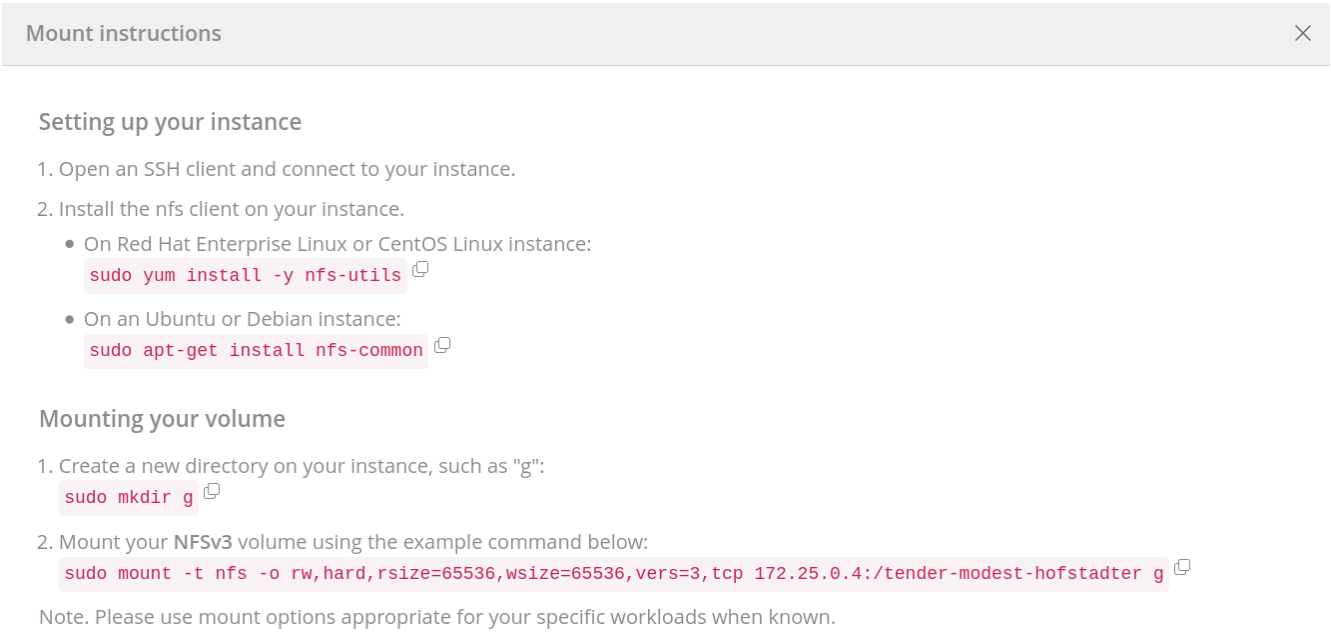

   The maximum I/O size defined by the `rsize` and `wsize` options is 1048576, however 65536 is the

recommended default for most use cases.

Note that Linux clients will default to NFSv4.1 unless the version is specified.

SMB example:

Mount instructions

Mapping your network drive

1. Click the **Start button** and then click on **Computer**.
2. Click **Map Network Drive**.
3. In the **Drive** list, click any available drive letter.
4. In the **Folder** box, type `\\test.cv-pm.local\silly-condescending-mcnulty`. To connect every time you log on to your computer, select the **Reconnect at logon** check box.
5. Click **Finish**.

3. Connect to your Amazon Elastic Compute Cloud (EC2) instance by using an SSH or RDP client, and then follow the mount instructions for your instance.

   After completing the steps in the mount instructions, you have successfully mounted the cloud volume to your AWS instance.

Copyright Information

Copyright © 2021 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark Information

NETAPP, the NETAPP logo, and the marks listed at http://www.netapp.com/TM are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.