# 7. Access Console/Web Console: NetApp HCI for Red Hat OpenShift on RHV

HCI

NetApp
July 08, 2020

This PDF was generated from https://docs.netapp.com/us-en/hci-solutions/redhat_openshift_7._access_console_web_console__netapp_hci_for_red_hat_openshift_on_rhv.html on May 31, 2021. Always check docs.netapp.com for the latest.

# Table of Contents

7. Access Console/Web Console: NetApp HCI for Red Hat OpenShift on RHV . . . . . 1

# 7. Access Console/Web Console: NetApp HCI for Red Hat OpenShift on RHV

To access the console or web console, complete the following steps:

1. To access the OCP cluster through the CLI, extract the `oc` command-line tools tar file and place its content in a directory that is in the user's path.

```
[user@rhel7 openshift-deploy]$ tar xvf openshift-client-linux.tar.gz
README.md
oc
kubectl
[user@rhel7 openshift-deploy]$ echo $PATH
/usr/local/bin: /usr/local/sbin:/sbin:/bin:/usr/sbin:/usr/bin

[user@rhel7 openshift-deploy]$ cp oc /usr/local/bin
```

2. To interact with the cluster through the CLI, you can use the `kubeconfig` file provided by the IPI process located in the `/auth` directory inside the folder from where you launched the installation program. To easily interact with the cluster, export the file that is created in the directory. After a successful cluster deployment, the file location and the following command are displayed.

```
[user@rhel7 openshift-deploy]$ export KUBECONFIG=/home/user/openshift-
deploy/auth/kubeconfig
```

3. Verify whether you have access to the cluster and whether the nodes are in the Ready state.

```
[user@rhel7 openshift-deploy]$ oc get nodes
NAME                                      STATUS   ROLES    AGE   VERSION
rhv-ocp-cluster-hdr7k-master-0            Ready    master   93m   v1.17.1
rhv-ocp-cluster-hdr7k-master-1            Ready    master   93m   v1.17.1
rhv-ocp-cluster-hdr7k-master-2            Ready    master   93m   v1.17.1
rhv-ocp-cluster-hdr7k-worker-0-ghskz      Ready    worker   83m   v1.17.1
rhv-ocp-cluster-hdr7k-worker-0-xdl99      Ready    worker   86m   v1.17.1
rhv-ocp-cluster-hdr7k-worker-0-zkxmt      Ready    worker   85m   v1.17.1
```

4. Log in to the web console URL by using the credentials, both of which were provided after the successful deployment of the cluster, and then verify GUI access to the cluster.

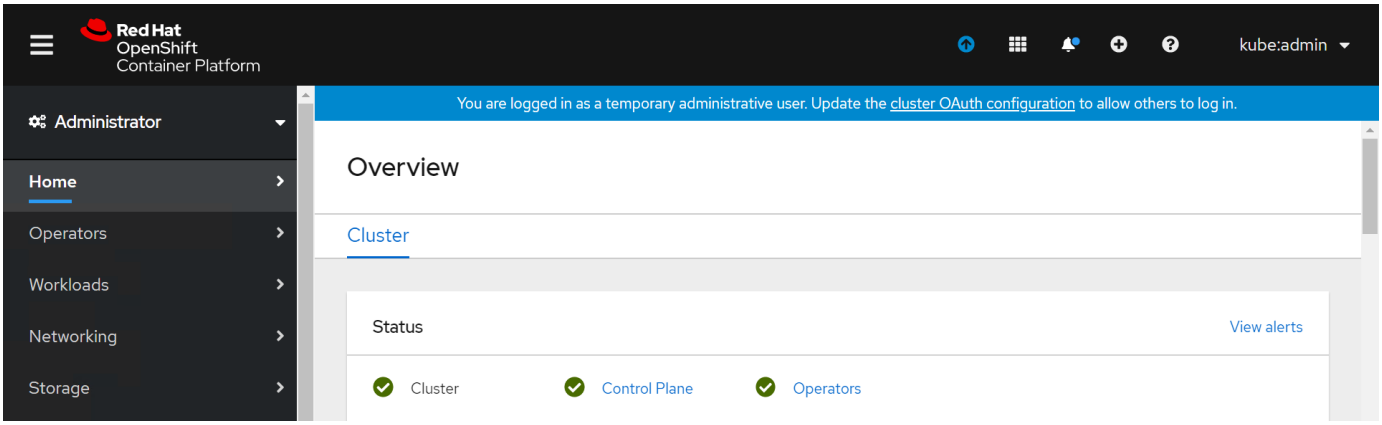
Red Hat
OpenShift
Container Platform
kube:admin
Administrator
Home
Operators
Workloads
Networking
Storage
You are logged in as a temporary administrative user. Update the cluster OAuth configuration to allow others to log in.
Overview
Cluster
Status
View alerts
Cluster
Control Plane
Operators

**Copyright Information**

Copyright © 2021 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

**Trademark Information**

NETAPP, the NETAPP logo, and the marks listed at http://www.netapp.com/TM are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.