接到 Cloud Volumes ONTAP

Cloud Manager 3.6

Ben Cammett
August 06, 2021

This PDF was generated from https://docs.netapp.com/zh-cn/occm36/task_connecting_to_otc.html on October 27, 2021. Always check docs.netapp.com for the latest.

目□

□接到 Cloud Volumes ONTAP 1
正在□接到 OnCommand System Manager 1
□接到 Cloud Volumes ONTAP CLI 1

□接到 Cloud Volumes ONTAP

如果□需要□ Cloud Volumes ONTAP □行高□管理、□可以使用 OnCommand System Manager 或命令行界面□行此操作。

正在□接到 OnCommand System Manager

□可能需要从 OnCommand System Manager □行一些 Cloud Volumes ONTAP 任□、□是一个基于□□器的管理工具、□行在 Cloud Volumes ONTAP 系□上。例如，如果要□建 LUN ，□需要使用 System Manager 。

要从其□□ Cloud Manager 的□算机必□与 Cloud Volumes ONTAP 建立网□□接。例如，□可能需要从 AWS 或 Azure 中的跳□主机登□到 Cloud Manager 。

> 在多个 AWS 可用性区域中部署□、 Cloud Volumes ONTAP HA 配置将浮□ IP 地址用于集群管理界面、□意味着外部路由不可用。□必□从属于同一路由域的主机□行□接。

□□

1. 在“工作□境”□面中，双□要使用 System Manager 管理的 Cloud Volumes ONTAP 系□。
2. □□菜□□□，然后□□ * 高□ > 系□管理器 * 。
3. □□ * □□ * 。

   System Manager 将在新的□□器□□□中加□。

4. 在登□屏幕的 "User Name" 字段中□入 * 管理 * ，□入□建工作□境□指定的密□，然后□□ * 登□ * 。

系□管理器控制台即会加□。□□在可以使用它来管理 Cloud Volumes ONTAP 。

□接到 Cloud Volumes ONTAP CLI

Cloud Volumes ONTAP CLI 使□可以□行所有管理命令、并且是□行高□任□或使用 CLI 更舒□的理想□□。□可以使用 Secure Shell （ SSH ）□接到 CLI 。

使用 SSH □接到 Cloud Volumes ONTAP 的主机必□与 Cloud Volumes ONTAP 建立网□□接。例如，□可能需要从 AWS 或 Azure 中的跳□主机使用 SSH 。

> 当部署在多个 Azs 中□、 Cloud Volumes ONTAP HA 配置将浮□ IP 地址用于集群管理界面、□意味着外部路由不可用。□必□从属于同一路由域的主机□行□接。

□□

1. 在 Cloud Manager 中，□定集群管理界面的 IP 地址：
   a. 在“工作□境”□面上，□□ Cloud Volumes ONTAP 系□。
   b. □制右□格中□示的集群管理 IP 地址。
2. 使用 SSH 使用管理□□□□接到集群管理接口 IP 地址。

   - 示例 *

下□□示了使用 PuTTY 的示例：

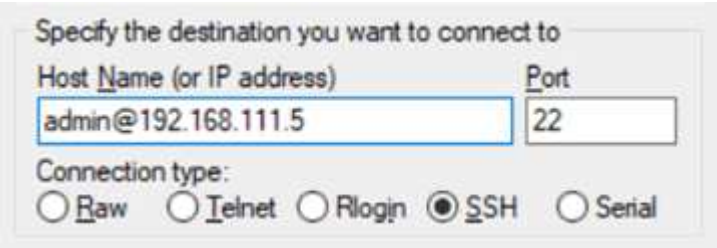

3. 在登□提示符□，□入管理□□□的密□。

   - 示例 *

```
Password: ********
COT2::>
```

Copyright Information

Copyright © 2021 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark Information

NETAPP, the NETAPP logo, and the marks listed at http://www.netapp.com/TM are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.