建和装入 NFS 卷

Cloud Manager 3.6

Ben Cammett
August 06, 2021

This PDF was generated from https://docs.netapp.com/zh-cn/occm36/task_provisioning_volume_view.html on October 27, 2021. Always check docs.netapp.com for the latest.

目□

□建和装入 NFS 卷 1
□建 NFS 卷 1
将卷装入 Linux 主机 3

□建和装入 NFS 卷

□可以使用 Cloud Manager □建 NFS 卷、在 AWS 存□之上提供企□□功能。

□建 NFS 卷

□可以□建□接到□个 AWS □例或□像到□一个□例的□例的卷以提供高可用性。

□□

1. 在卷□□□中，□□ * □建新卷 * 。
2. 在 "Create New Volume" □面上，□□卷□型：

□□	Description
□建卷	□建□接到□个 AWS □例的卷。
□建 HA 卷	□建一个□接到□个 AWS □例的卷并□像到□一个□例以在□生故障□提供高可用性。□□信息□□可□看有□ HA 卷所需□例的其他□□信息。

3. 如果□□了□建卷，□指定第一个卷的□□信息，然后□□ * □建 * 。

   下表介□了可能需要指□的字段：

字段	Description
Size	卷的最大大小取决于□有存□系□中的可用容量。自□在卷上□用精□配置、□□□就可以□建一个大于当前可用物理存□的卷。在写入数据□，不会□先分配存□空□、而是□□个卷分配空□。
AWS 磁□□型	□□□□□□足性能和成本要求的磁□。 • 通用 SSD 磁□可平衡各□工作□□的成本和性能。性能是根据 IOPS 来定□的。 • 吞吐量□化的 HDD 磁□□用于需要以□低的价格快速一致的吞吐量的□繁□□工作□□。 • 冷 HDD 磁□用于□□或不□常□□的数据，因□性能非常低。与吞吐量□化的 HDD 磁□一□、性能也是根据吞吐量来定□的。 有□□□信息，□参□ "AWS 文□： EBS 卷□型"。

   下□□示了 " □建卷 " □面已填充：

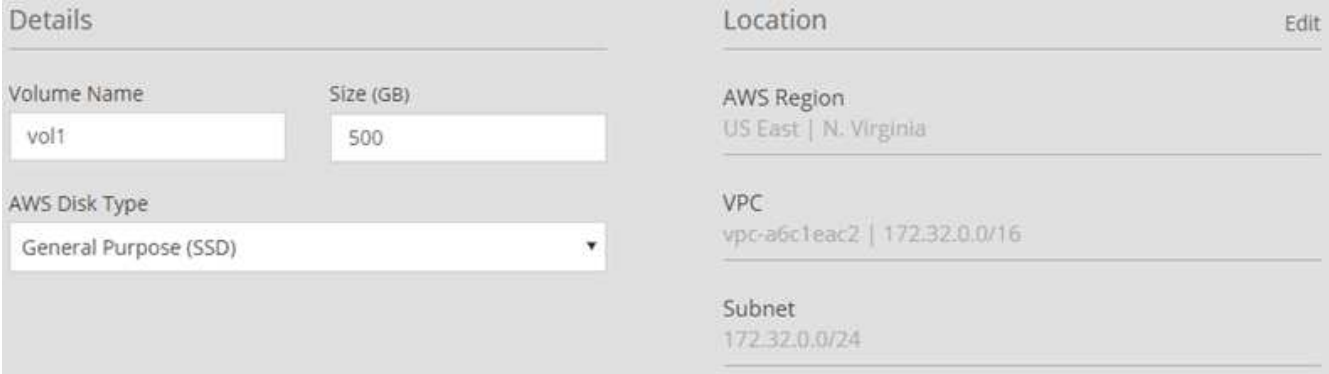

4. 如果□□了□建 HA 卷，□指定此卷的□□信息，然后□□ * □建 * 。

下表介□了可能需要指□的字段：

字段	Description
Size	卷的最大大小取决于□有存□系□中的可用容量。自□在卷上□用精□配置、□□□就可以□建一个大于当前可用物理存□的卷。在写入数据□，不会□先分配存□空□、而是□□个卷分配空□。
AWS 磁□□型	□□□□□□足性能和成本要求的磁□。 • 通用 SSD 磁□可平衡各□工作□□的成本和性能。性能是根据 IOPS 来定□的。 • 吞吐量□化的 HDD 磁□□用于需要快速一致的吞吐量的□繁□□的工作□□。 有□□□信息，□参□ "AWS 文□： EBS 卷□型"。
位置	□□□□□一个 vPC 、它在三个独立的可用性区域中包含三个子网。
□点和□解器	如果可能、 Cloud Manager 会□□个□例□□□独的可用性区域、因□它是受支持的最佳配置。
浮□ IP	□区域中所有 VPC 的 IP 地址必□位于 CIDR □之外。
路由表	如果有多个路由表、□□□正□的路由表非常重要。否□，某些客□端可能无法□□ HA □。有□□□信息，□参□ "AWS 文□：路由表"。

下□□示了□点和□解器□面。□个□例都位于□独的可用性区域中。

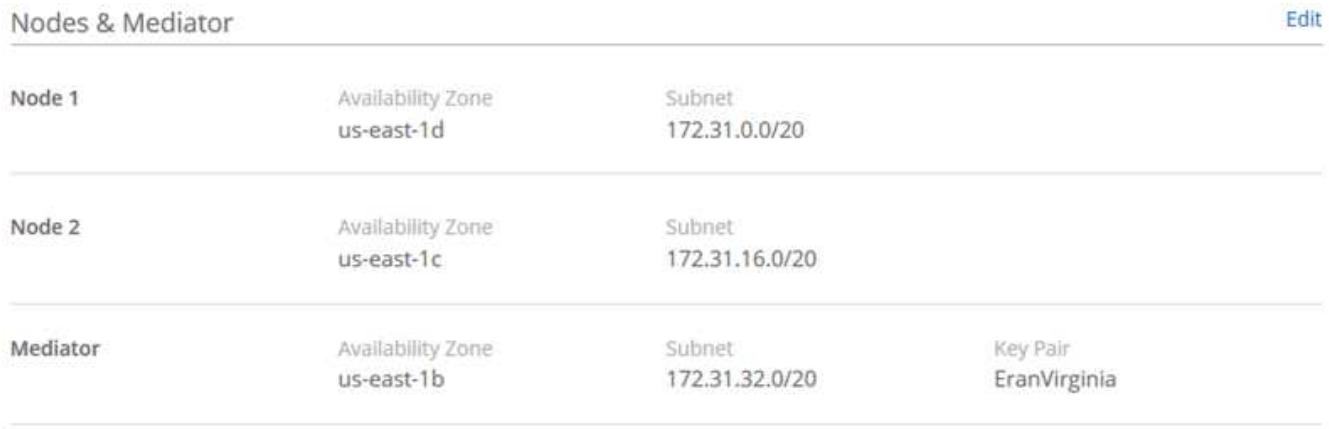

Cloud Manager 可在□有系□或新系□上□建卷。如果需要新系□、□□建卷大□需要 25 分□。

将卷装入 Linux 主机

□建卷后、□将其装入主机以□□卷。

□□

1. 在卷□□□中，将鼠□光□置于卷上方，□□菜□□□，然后□□ * 挂□ * 。
2. □□ * □制 * 。
3. 在 Linux 主机上、通□更改目□目□修改□制的文本、然后□入命令以装入卷。

Copyright Information

Copyright © 2021 NetApp, Inc. All rights reserved. Printed in the U.S. No part of this document covered by copyright may be reproduced in any form or by any means-graphic, electronic, or mechanical, including photocopying, recording, taping, or storage in an electronic retrieval system-without prior written permission of the copyright owner.

Software derived from copyrighted NetApp material is subject to the following license and disclaimer:

THIS SOFTWARE IS PROVIDED BY NETAPP “AS IS” AND WITHOUT ANY EXPRESS OR IMPLIED WARRANTIES, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE, WHICH ARE HEREBY DISCLAIMED. IN NO EVENT SHALL NETAPP BE LIABLE FOR ANY DIRECT, INDIRECT, INCIDENTAL, SPECIAL, EXEMPLARY, OR CONSEQUENTIAL DAMAGES (INCLUDING, BUT NOT LIMITED TO, PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES; LOSS OF USE, DATA, OR PROFITS; OR BUSINESS INTERRUPTION) HOWEVER CAUSED AND ON ANY THEORY OF LIABILITY, WHETHER IN CONTRACT, STRICT LIABILITY, OR TORT (INCLUDING NEGLIGENCE OR OTHERWISE) ARISING IN ANY WAY OUT OF THE USE OF THIS SOFTWARE, EVEN IF ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

NetApp reserves the right to change any products described herein at any time, and without notice. NetApp assumes no responsibility or liability arising from the use of products described herein, except as expressly agreed to in writing by NetApp. The use or purchase of this product does not convey a license under any patent rights, trademark rights, or any other intellectual property rights of NetApp.

The product described in this manual may be protected by one or more U.S. patents, foreign patents, or pending applications.

RESTRICTED RIGHTS LEGEND: Use, duplication, or disclosure by the government is subject to restrictions as set forth in subparagraph (c)(1)(ii) of the Rights in Technical Data and Computer Software clause at DFARS 252.277-7103 (October 1988) and FAR 52-227-19 (June 1987).

Trademark Information

NETAPP, the NETAPP logo, and the marks listed at http://www.netapp.com/TM are trademarks of NetApp, Inc. Other company and product names may be trademarks of their respective owners.