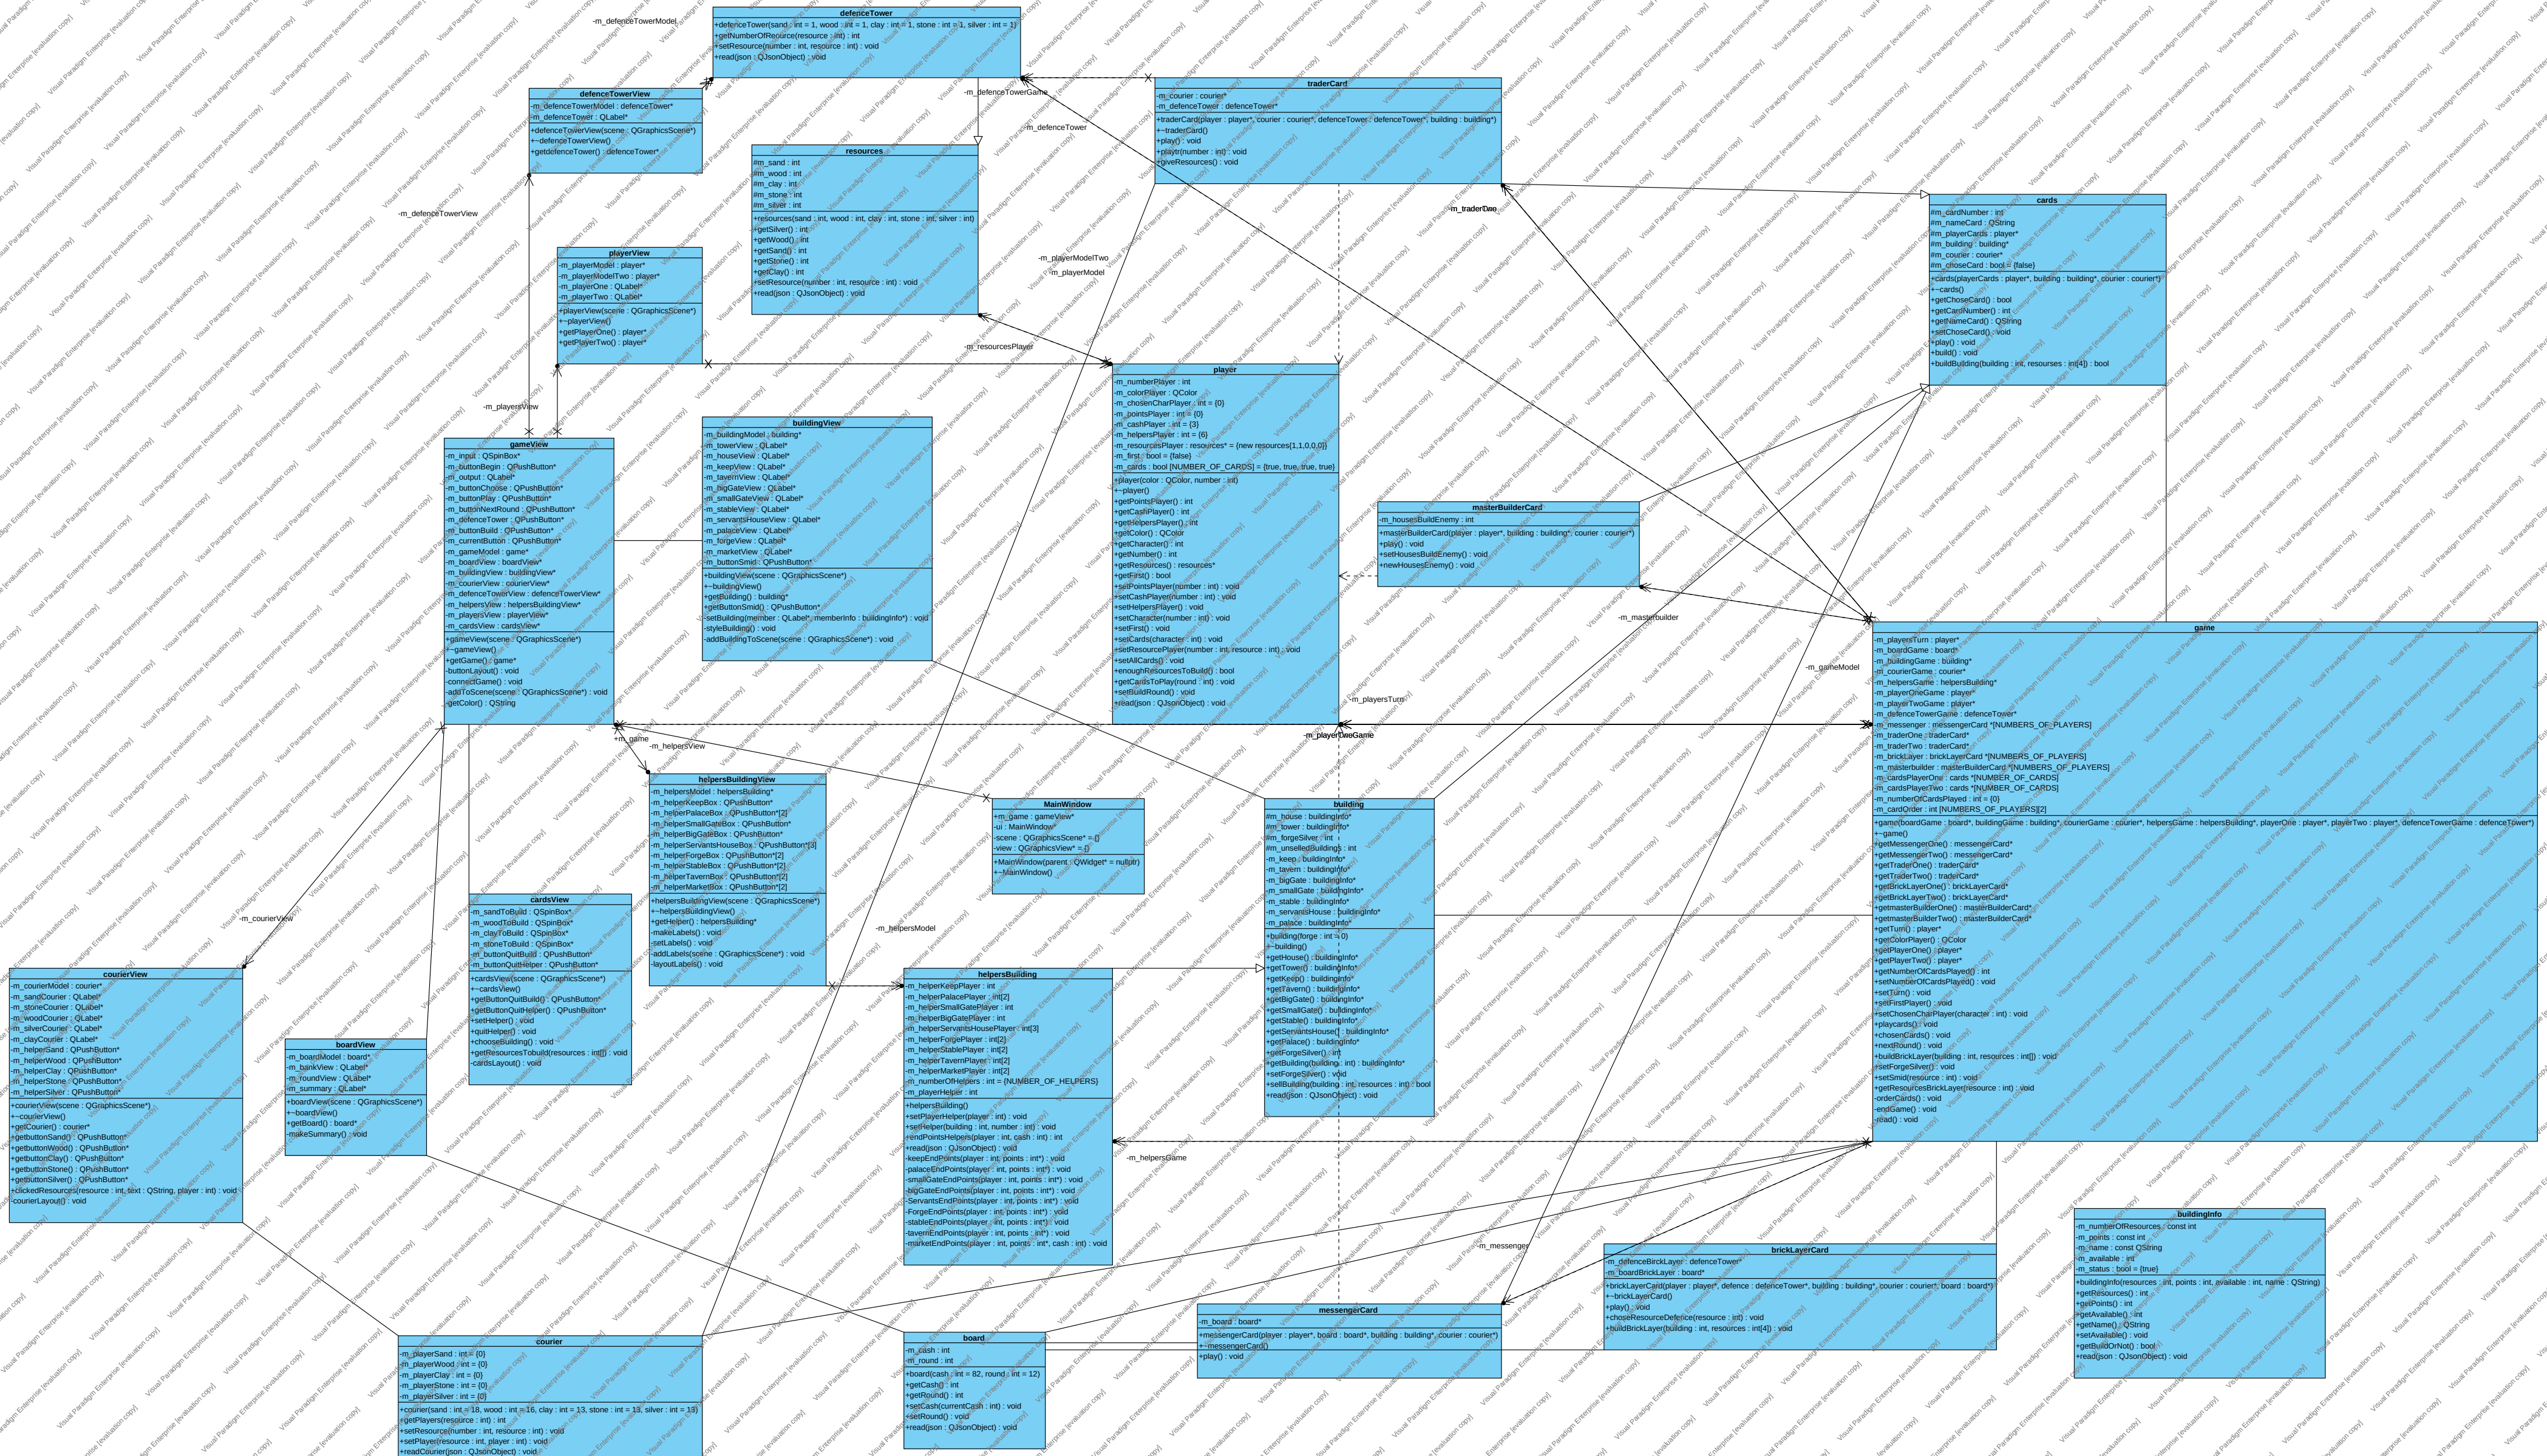
defenceTower
+defenceTower(sand : int = 1, wood : int = 1, clay : int = 1, stone : int = 1, silver : int = 1)
+getNumberOfReource(resource : int) : int
+setResource(number : int, resource : int) : void
+read(json : QJsonObject) : void
-m_defenceTowerModel
defenceTowerView
-m_defenceTowerModel : defenceTower*
-m_defenceTower : QLabel*
+defenceTowerView(scene : QGraphicsScene*)
+~defenceTowerView()
+getdefenceTower() : defenceTower*
-m_defenceTowerView
-m_defenceTowerGame
-m_defenceTower
resources
#m_sand : int
#m_wood : int
#m_clay : int
#m_stone : int
#m_silver : int
+resources(sand : int, wood : int, clay : int, stone : int, silver : int)
+getSilver() : int
+getWood() : int
+getSand() : int
+getStone() : int
+getClay() : int
+setResource(number : int, resource : int) : void
+read(json : QJsonObject) : void
traderCard
-m_courier : courier*
-m_defenceTower : defenceTower*
+traderCard(player : player*, courier : courier*, defenceTower : defenceTower*, building : building*)
+~traderCard()
+play() : void
+playtr(number : int) : void
+giveResources() : void
-m_traderOne
-m_traderTwo
cards
#m_cardNumber : int
#m_nameCard : QString
#m_playerCards : player*
#m_building : building*
#m_courier : courier*
#m_choseCard : bool = {false}
+cards(playerCards : player*, building : building*, courier : courier*)
+~cards()
+getChoseCard() : bool
+getCardNumber() : int
+getNameCard() : QString
+setChoseCard() : void
+play() : void
+build() : void
+buildBuilding(building : int, resourses : int[4]) : bool
playerView
-m_playerModel : player*
-m_playerModelTwo : player*
-m_playerOne : QLabel*
-m_playerTwo : QLabel*
+playerView(scene : QGraphicsScene*)
+~playerView()
+getPlayerOne() : player*
+getPlayerTwo() : player*
-m_playerModelTwo
-m_playerModel
-m_resourcesPlayer
-m_playersView
player
-m_numberPlayer : int
-m_colorPlayer : QColor
-m_chosenCharPlayer : int = {0}
-m_pointsPlayer : int = {0}
-m_cashPlayer : int = {3}
-m_helpersPlayer : int = {6}
-m_resourcesPlayer : resources* = {new resources{1,1,0,0,0}}
-m_first : bool = {false}
-m_cards : bool [NUMBER_OF_CARDS] = {true, true, true, true}
+player(color : QColor, number : int)
+~player()
+getPointsPlayer() : int
+getCashPlayer() : int
+getHelpersPlayer() : int
+getColor() : QColor
+getCharacter() : int
+getNumber() : int
+getResources() : resources*
+getFirst() : bool
+setPointsPlayer(number : int) : void
+setCashPlayer(number : int) : void
+setHelpersPlayer() : void
+setCharacter(number : int) : void
+setFirst() : void
+setCards(character : int) : void
+setResourcePlayer(number : int, resource : int) : void
+setAllCards() : void
+enoughResourcesToBuild() : bool
+getCardsToPlay(round : int) : void
+setBuildRound() : void
+read(json : QJsonObject) : void
masterBuilderCard
-m_housesBuildEnemy : int
+masterBuilderCard(player : player*, building : building*, courier : courier*)
+play() : void
+setHousesBuildEnemy() : void
+newHousesEnemy() : void
-m_masterbuilder
-m_gameModel
-m_playersTurn
-m_playerOneGame
-m_playerTwoGame
gameView
-m_input : QSpinBox*
-m_buttonBegin : QPushButton*
-m_output : QLabel*
-m_buttonChoose : QPushButton*
-m_buttonPlay : QPushButton*
-m_buttonNextRound : QPushButton*
-m_defenceTower : QPushButton*
-m_buttonBuild : QPushButton*
-m_currentButton : QPushButton*
-m_gameModel : game*
-m_boardView : boardView*
-m_buildingView : buildingView*
-m_courierView : courierView*
-m_defenceTowerView : defenceTowerView*
-m_helpersView : helpersBuildingView*
-m_playersView : playerView*
-m_cardsView : cardsView*
+gameView(scene : QGraphicsScene*)
+~gameView()
+getGame() : game*
-buttonLayout() : void
-connectGame() : void
-addToScene(scene : QGraphicsScene*) : void
-getColor() : QString
buildingView
-m_buildingModel : building*
-m_towerView : QLabel*
-m_houseView : QLabel*
-m_keepView : QLabel*
-m_tavernView : QLabel*
-m_bigGateView : QLabel*
-m_smallGateView : QLabel*
-m_stableView : QLabel*
-m_servantsHouseView : QLabel*
-m_palaceView : QLabel*
-m_forgeView : QLabel*
-m_marketView : QLabel*
-m_buttonSmid : QPushButton*
+buildingView(scene : QGraphicsScene*)
+~buildingView()
+getBuilding() : building*
+getButtonSmid() : QPushButton*
-setBuilding(member : QLabel*, memberInfo : buildingInfo*) : void
-styleBuilding() : void
-addBuildingToScene(scene : QGraphicsScene*) : void
game
-m_playersTurn : player*
-m_boardGame : board*
-m_buildingGame : building*
-m_courierGame : courier*
-m_helpersGame : helpersBuilding*
-m_playerOneGame : player*
-m_playerTwoGame : player*
-m_defenceTowerGame : defenceTower*
-m_messenger : messengerCard *[NUMBERS_OF_PLAYERS]
-m_traderOne : traderCard*
-m_traderTwo : traderCard*
-m_brickLayer : brickLayerCard *[NUMBERS_OF_PLAYERS]
-m_masterbuilder : masterBuilderCard *[NUMBERS_OF_PLAYERS]
-m_cardsPlayerOne : cards *[NUMBER_OF_CARDS]
-m_cardsPlayerTwo : cards *[NUMBER_OF_CARDS]
-m_numberOfCardsPlayed : int = {0}
-m_cardOrder : int [NUMBERS_OF_PLAYERS][2]
+game(boardGame : board*, buildingGame : building*, courierGame : courier*, helpersGame : helpersBuilding*, playerOne : player*, playerTwo : player*, defenceTowerGame : defenceTower*)
+~game()
+getMessengerOne() : messengerCard*
+getMessengerTwo() : messengerCard*
+getTraderOne() : traderCard*
+getTraderTwo() : traderCard*
+getBrickLayerOne() : brickLayerCard*
+getBrickLayerTwo() : brickLayerCard*
+getmasterBuilderOne() : masterBuilderCard*
+getmasterBuilderTwo() : masterBuilderCard*
+getTurn() : player*
+getColorPlayer() : QColor
+getPlayerOne() : player*
+getPlayerTwo() : player*
+getNumberOfCardsPlayed() : int
+setNumberOfCardsPlayed() : void
+setTurn() : void
+setFirstPlayer() : void
+setChosenCharPlayer(character : int) : void
+playcards() : void
+chosenCards() : void
+nextRound() : void
+buildBrickLayer(building : int, resources : int[]) : void
+setForgeSilver() : void
+setSmid(resource : int) : void
+getResourcesBrickLayer(resource : int) : void
-orderCards() : void
-endGame() : void
-read() : void
+m_game
-m_helpersView
helpersBuildingView
-m_helpersModel : helpersBuilding*
-m_helperKeepBox : QPushButton*
-m_helperPalaceBox : QPushButton*[2]
-m_helperSmallGateBox : QPushButton*
-m_helperBigGateBox : QPushButton*
-m_helperServantsHouseBox : QPushButton*[3]
-m_helperForgeBox : QPushButton*[2]
-m_helperStableBox : QPushButton*[2]
-m_helperTavernBox : QPushButton*[2]
-m_helperMarketBox : QPushButton*[2]
+helpersBuildingView(scene : QGraphicsScene*)
+~helpersBuildingView()
+getHelper() : helpersBuilding*
-makeLabels() : void
-setLabels() : void
-addLabels(scene : QGraphicsScene*) : void
-layoutLabels() : void
MainWindow
+m_game : gameView*
-ui : MainWindow*
-scene : QGraphicsScene* = {}
-view : QGraphicsView* = {}
+MainWindow(parent : QWidget* = nullptr)
+~MainWindow()
building
#m_house : buildingInfo*
#m_tower : buildingInfo*
#m_forgeSilver : int
#m_unselledBuildings : int
-m_keep : buildingInfo*
-m_tavern : buildingInfo*
-m_bigGate : buildingInfo*
-m_smallGate : buildingInfo*
-m_stable : buildingInfo*
-m_servantsHouse : buildingInfo*
-m_palace : buildingInfo*
+building(forge : int = 0)
+~building()
+getHouse() : buildingInfo*
+getTower() : buildingInfo*
+getKeep() : buildingInfo*
+getTavern() : buildingInfo*
+getBigGate() : buildingInfo*
+getSmallGate() : buildingInfo*
+getStable() : buildingInfo*
+getServantsHouse() : buildingInfo*
+getPalace() : buildingInfo*
+getForgeSilver() : int
+getBuilding(building : int) : buildingInfo*
+setForgeSilver() : void
+sellBuilding(building : int, resources : int) : bool
+read(json : QJsonObject) : void
-m_courierView
cardsView
-m_sandToBuild : QSpinBox*
-m_woodToBuild : QSpinBox*
-m_clayToBuild : QSpinBox*
-m_stoneToBuild : QSpinBox*
-m_buttonQuitBuild : QPushButton*
-m_buttonQuitHelper : QPushButton*
+cardsView(scene : QGraphicsScene*)
+~cardsView()
+getButtonQuitBuild() : QPushButton*
+getButtonQuitHelper() : QPushButton*
+setHelper() : void
+quitHelper() : void
+chooseBuilding() : void
+getResourcesTobuild(resources : int[]) : void
-cardsLayout() : void
-m_helpersModel
courierView
-m_courierModel : courier*
-m_sandCourier : QLabel*
-m_stoneCourier : QLabel*
-m_woodCourier : QLabel*
-m_silverCourier : QLabel*
-m_clayCourier : QLabel*
-m_helperSand : QPushButton*
-m_helperWood : QPushButton*
-m_helperClay : QPushButton*
-m_helperStone : QPushButton*
-m_helperSilver : QPushButton*
+courierView(scene : QGraphicsScene*)
+~courierView()
+getCourier() : courier*
+getbuttonSand() : QPushButton*
+getbuttonWood() : QPushButton*
+getbuttonClay() : QPushButton*
+getbuttonStone() : QPushButton*
+getbuttonSilver() : QPushButton*
+clickedResources(resource : int, text : QString, player : int) : void
-courierLayout() : void
boardView
-m_boardModel : board*
-m_bankView : QLabel*
-m_roundView : QLabel*
-m_summary : QLabel*
+boardView(scene : QGraphicsScene*)
+~boardView()
+getBoard() : board*
-makeSummary() : void
helpersBuilding
-m_helperKeepPlayer : int
-m_helperPalacePlayer : int[2]
-m_helperSmallGatePlayer : int
-m_helperBigGatePlayer : int
-m_helperServantsHousePlayer : int[3]
-m_helperForgePlayer : int[2]
-m_helperStablePlayer : int[2]
-m_helperTavernPlayer : int[2]
-m_helperMarketPlayer : int[2]
-m_numberOfHelpers : int = {NUMBER_OF_HELPERS}
-m_playerHelper : int
+helpersBuilding()
+setPlayerHelper(player : int) : void
+setHelper(building : int, number : int) : void
+endPointsHelpers(player : int, cash : int) : int
+read(json : QJsonObject) : void
-keepEndPoints(player : int, points : int*) : void
-palaceEndPoints(player : int, points : int*) : void
-smallGateEndPoints(player : int, points : int*) : void
-bigGateEndPoints(player : int, points : int*) : void
-ServantsEndPoints(player : int, points : int*) : void
-ForgeEndPoints(player : int, points : int*) : void
-stableEndPoints(player : int, points : int*) : void
-tavernEndPoints(player : int, points : int*) : void
-marketEndPoints(player : int, points : int*, cash : int) : void
-m_helpersGame
-m_messenger
brickLayerCard
-m_defenceBirckLayer : defenceTower*
-m_boardBrickLayer : board*
+brickLayerCard(player : player*, defence : defenceTower*, building : building*, courier : courier*, board : board*)
+~brickLayerCard()
+play() : void
+choseResourceDefence(resource : int) : void
+buildBrickLayer(building : int, resources : int[4]) : void
buildingInfo
-m_numberOfResources : const int
-m_points : const int
-m_name : const QString
-m_available : int
-m_status : bool = {true}
+buildingInfo(resources : int, points : int, available : int, name : QString)
+getResources() : int
+getPoints() : int
+getAvailable() : int
+getName() : QString
+setAvailable() : void
+getBuildOrNot() : bool
+read(json : QJsonObject) : void
messengerCard
-m_board : board*
+messengerCard(player : player*, board : board*, building : building*, courier : courier*)
+~messengerCard()
+play() : void
board
-m_cash : int
-m_round : int
+board(cash : int = 82, round : int = 12)
+getCash() : int
+getRound() : int
+setCash(currentCash : int) : void
+setRound() : void
+read(json : QJsonObject) : void
courier
-m_playerSand : int = {0}
-m_playerWood : int = {0}
-m_playerClay : int = {0}
-m_playerStone : int = {0}
-m_playerSilver : int = {0}
+courier(sand : int = 18, wood : int = 16, clay : int = 13, stone : int = 13, silver : int = 13)
+getPlayers(resource : int) : int
+setResource(number : int, resource : int) : void
+setPlayer(resource : int, player : int) : void
+readCourier(json : QJsonObject) : void

Visual Paradigm Enterprise [evaluation copy]