

# **NetCore IOS SDK**

## **Integration Doc for Cordova/PhoneGap iOS**

Steps are as follows:

1. [Creating App ID And Configure Push notification Certificates](#)

2. Creating Provisional Profile.
3. Configure Application in NetCore
4. Setup the NetCore Push SDK into your project.
5. Integrate NetCore SDK & Push Methods.

### 1.1 Creating Explicit App Id

For Push Notification you need create explicit App id and enable push notification for you app id, following are list of step to create app id.

1. Sign in to [developer.apple.com/account](https://developer.apple.com/account), and click Certificates, IDs & Profiles.
2. Under Identifiers, select App IDs.
3. Click the Add button (+) in the upper-right corner.
4. Enter a name or description for the App ID in the description field.
5. To create an explicit App ID, select Explicit App ID and enter the app's bundle ID in the Bundle ID field. An explicit App ID exactly matches the bundle ID of an app you're building. For example , **com.NetCore.PushDemo**. An explicit App ID can't contain an asterisk (\*).
6. Select the Push Notification checkbox to enable the app Push Notification service
7. Click Continue.
8. Review the registration information, and click Register.
9. Click Done.

Certificates

- All
- Pending
- Development
- Production

Identifiers

- App IDs**
- Pass Type IDs
- Website Push IDs
- iCloud Containers
- App Groups
- Merchant IDs

Devices

- All
- Apple TV
- Apple Watch
- iPad
- iPhone
- iPod Touch

Provisioning Profiles

- All
- Development

ID

Registering an App ID

The App ID string contains two parts separated by a period (.) — an App ID Prefix that is defined as your Team ID by default and an App ID Suffix that is defined as a Bundle ID search string. Each part of an App ID has different and important uses for your app. [Learn More](#)

App ID Description

Name:

com.NetCore.PushDemo

You cannot use special characters such as @, &, \*, ', "  
Please enter a valid Name

App ID Prefix

Value: Y344Y7796A (Team ID)

App ID Suffix

[Explicit App ID](#)

## 1.2 Configuring Push Notification for your application

☒


Push Notifications

Configurable


**Apple Push Notification service SSL Certificates**

To configure push notifications for this iOS App ID, a Client SSL Certificate that allows your notification server to connect to the Apple Push Notification Service is required. Each iOS App ID requires its own Client SSL Certificate. Manage and generate your certificates below.

Development SSL Certificate

Create an additional certificate to use for this App ID.  [Create Certificate...](#)

Production SSL Certificate

Create an additional certificate to use for this App ID.  [Create Certificate...](#)

### Creating Push Notification Certificates & CSR File



## About Creating a Certificate Signing Request (CSR)

To manually generate a Certificate, you need a Certificate Signing Request (CSR) file from your Mac. To create a CSR file, follow the instructions below to create one using Keychain Access.

### Create a CSR file.

In the Applications folder on your Mac, open the Utilities folder and launch Keychain Access.


Within the Keychain Access drop down menu, select Keychain Access > Certificate Assistant > Request a Certificate from a Certificate Authority.

- In the Certificate Information window, enter the following information:
  - In the User Email Address field, enter your email address.
  - In the Common Name field, create a name for your private key (e.g., John Doe Dev Key).
  - The CA Email Address field should be left empty.
  - In the "Request is" group, select the "Saved to disk" option.
- Click Continue within Keychain Access to complete the CSR generating process.

Cancel

Back

Continue

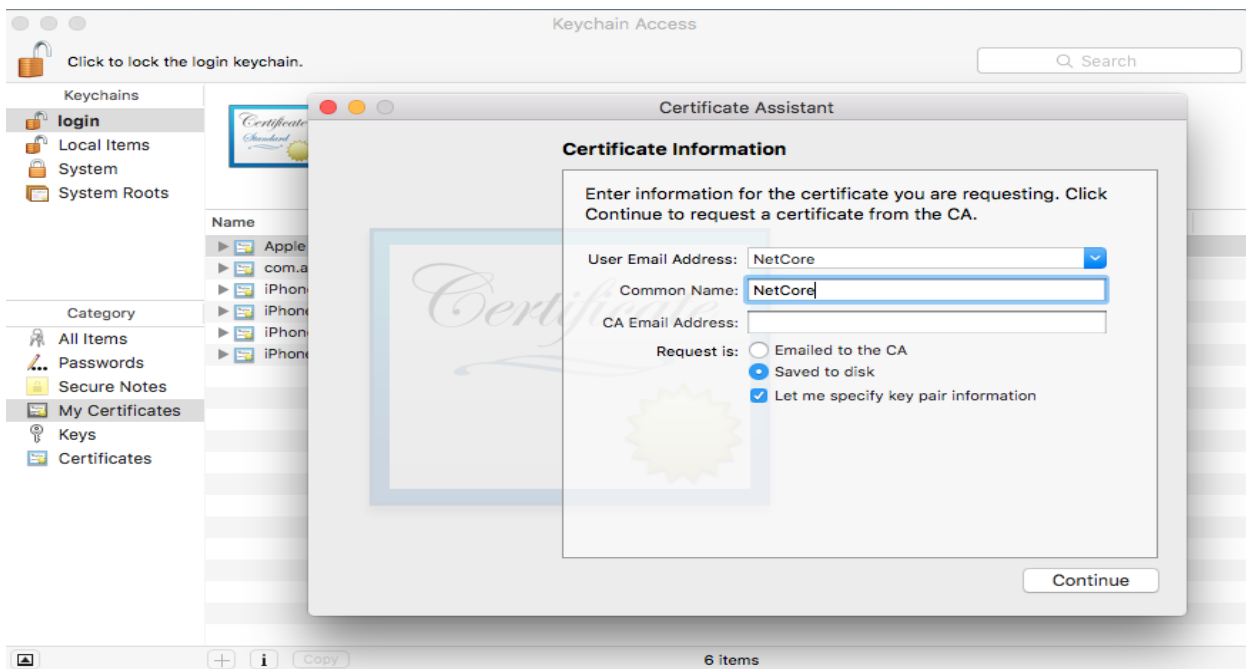

## Generating Certificates and Download it



**Your certificate is ready.**

### Download, Install and Backup

Download your certificate to your Mac, then double click the .cer file to install in Keychain Access. Make sure to save a backup copy of your private and public keys somewhere secure.



Name: Apple Push Services: com.NetCore.PushDemo  
Type: Apple Push Services  
Expires: Sep 15, 2017

[Download](#)



### Push Notifications

Configurable

#### Apple Push Notification service SSL Certificates

To configure push notifications for this iOS App ID, a Client SSL Certificate that allows your notification server to connect to the Apple Push Notification Service is required. Each iOS App ID requires its own Client SSL Certificate. Manage and generate your certificates below.

Development SSL Certificate

Create an additional certificate to use for this App ID. [Create Certificate...](#)

Production SSL Certificate

Name: Apple Push Services: com.NetCore.PushDemo  
Type: Apple Push Services  
Expires: Sep 15, 2017

[Revoke](#) [Download](#)

- Double click on the downloaded SSL certificate to install it in your Keychain.
- In Keychain Access, under "My Certificates", find the certificate you just added.
- Export certificates .p12 file and add "NetCorePush.p12" name

[Reference link for SSL generation](#)

## 2. Creating Provisioning Profile

A provisioning profile is used to install your application on an iPhone device, following are types of provisioning profiles

**1)Development provisioning profiles** :- This profile is used to install applications on limited team members' devices. Follow the steps in [Creating Development Provisioning Profiles](#) if you want to create your own development provisioning profile.

**2)Distribution provisioning profiles** : Distribution profile having 2 types

**1)Ad Hoc Distribution** :- you can create this profile when you export an app archive and select the ad hoc deployment option, as described in [Exporting Your App for Testing Outside the Store](#). To create an ad hoc provisioning profile directly in your developer account, read [Creating Ad Hoc Provisioning Profiles](#)

## **2)App Store Distribution**

We create a store App Store Distribution file when we want to deploy an application over the app store. To create a store provisioning profile directly in your developer account, read [Creating Store Provisioning Profiles](#).

**Note:** For push notification you can create Ad Hoc Provisioning Profiles for testing, but NetCore is configured for production level environment for push notification.

## **Creating Ad Hoc Provisioning Profiles (iOS, tvOS, watchOS)**

To create an ad hoc provisioning profile

1. Sign in to [developer.apple.com/account](https://developer.apple.com/account), and click Certificates, IDs & Profiles.
2. Under Provisioning Profiles, select All.
3. Click the Add button (+) in the upper-right corner.
4. Select Ad Hoc as the distribution method, and click Continue.
5. Choose the App ID you used for development, which matches your bundle ID, from the App ID pop-up menu, and click Continue.
6. If you used a team provisioning profile during development and the menu contains only the XC Wildcard, select it. If the menu contains another Xcode-managed explicit App ID (it begins with "XC" followed by the bundle ID), select that App ID. If you created your own App ID, select that one.
7. Select the distribution certificate you want to use, and click Continue.
8. If you don't have a distribution certificate, create one using Xcode, as described in [Creating Signing Identities](#), before continuing.
9. Select the devices you want to use for testing, and click Continue.
10. Enter a profile name, and click Continue.

11. Wait while your developer account generates the provisioning profile.
12. At the bottom of the page, Click Done.

### 3. Configure Application in NetCore

To Use NetCore push notification you have to first create application inside NetCore website and upload .p12 certificate of your application.

Z+

DOMESTIC  
1ST PARTY

POSTPAID

DO NOT DELIVER  
is Disable

ACTIVE  
since 14 Jun 2016

netCORE  
Smartech

[Broadcast](#)

[Automation](#)

[Manage](#)

[Reports](#)

[Admin](#)

[Logs](#)

What's New

?

🔔

👤











[List Dashboard](#)

[Templates](#)

[Assets](#)

## App Dashboard

Create New App

App Name	App ID	Subscribers	Platforms
Test ios	4a02532c1625f770161afd61ed5748f5	0	 
Testing	4de4838587cd5cbce17d6b77b5710ff9	2	 
TestQuagnitia	2714dd99a4b547c56ec8c276bd4a5e87	159	 
Testing_NewId	75a841cb018d1369cff19f07b85ca88a	0	 
NewIOSTesting	c8d65d33abfbd7bde537fe7076067d0	8	 

1 2 3 > >>

[About netCORE](#)

[Product Demo](#)

[Email Marketing](#)

[Blog](#)

[Terms & Conditions](#)

[Anti-Spam Policy](#)

[Privacy Policy](#)

a netCORE product

## Create New App

App Name \*

App Description

Platform Configuration



Certificate file (.cer)

Browse...

No file selected.

Push Certificate (.p12)

Browse...

No file selected.

Private key password

Framework

Native

Create App

Cancel



Z+DOMESTIC1ST PARTY

ACTIVEsince 14 jun 2018

netCORESmartech

List Dashboard | Template

App Integration Details

App ID is - 4a02532c1625f770161afd61ed5748f5

Include this App ID while integrating SDK in your App.

Download details for [Android](#)

Close

Platform Configuration

Certificate file (.cer)

Browse... dummy1.cer

Push Certificate (.p12)

Browse... p12dummy.p12

Private key password

Test

Framework

Native

Create App | Cancel

About netCORE | Product Demo | Email Marketing | Blog | Terms & Conditions | Anti-Spam Policy | Privacy Policy

a netCORE product

## 4. Setup the NetCore Push SDK

### NetCore Integration Using Cocoa Pod

- 1) Install CocoaPods on your computer.
- 2) open your project add Create pod file using below command

```
Pod init
```

- 3) Add following Line in your podfile

```
pod 'Netcore-Smartech-iOS-SDK'
```

- 4) Run following command in your project directory

```
Pod Install
```

- 5) open App.xcworkspace and build app.

### NetCore Manual Integration

Download NetCore iOS SDK from below

links **GitHub**

[git clone https://github.com/NetcoreSolutions/Smartech-ios-sdk](https://github.com/NetcoreSolutions/Smartech-ios-sdk)

#### **From Browser**

<https://github.com/NetcoreSolutions/Smartech-ios-sdk/archive/master.zip>

- 1) **Download iOS SDK** and Unzip the file. Open Framework folder - inside it you will see NetCorePush.framework file.
- 2) Open existing or create a new project in Xcode and drag drop or add framework in Target > Embedded Binaries section

PROJECT

NetCorePushDemo

TARGETS

NetCorePushDemo

General

Capabilities

Resource Tags

Info

Build Settings

Build Phases

Build Rules

Device Orientation

☒ Portrait

☐ Upside Down

☐ Landscape Left

☐ Landscape Right

Status Bar Style

Default

☐ Hide status bar

☐ Requires full screen

▼ App Icons and Launch Images

App Icons Source

AppIcon

Launch Images Source

Use Asset Catalog

Launch Screen File

LaunchScreen


▼ Embedded Binaries

Add embedded binaries here

+ -



Click on + Button to add NetCorePush Framework


▼ Linked Frameworks and Libraries

Name	Status
 Security.framework	Required ↕

+ -

Filter

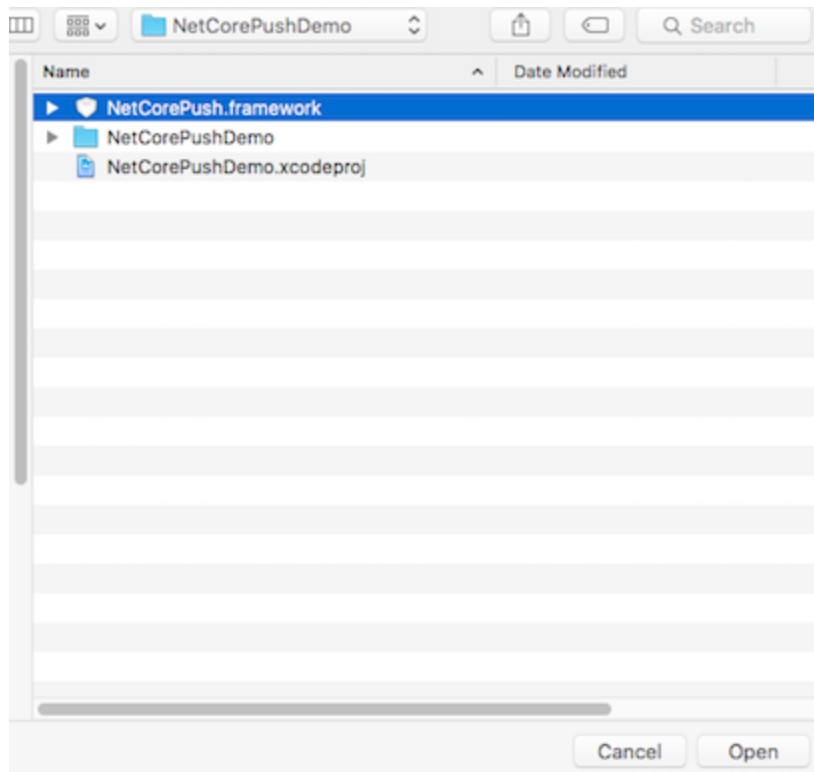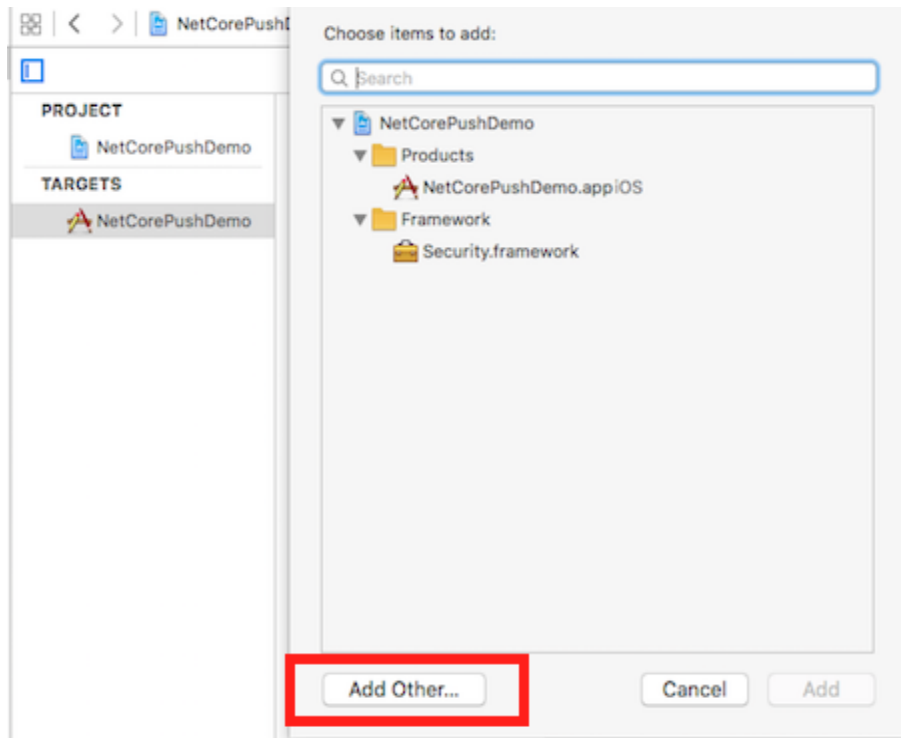

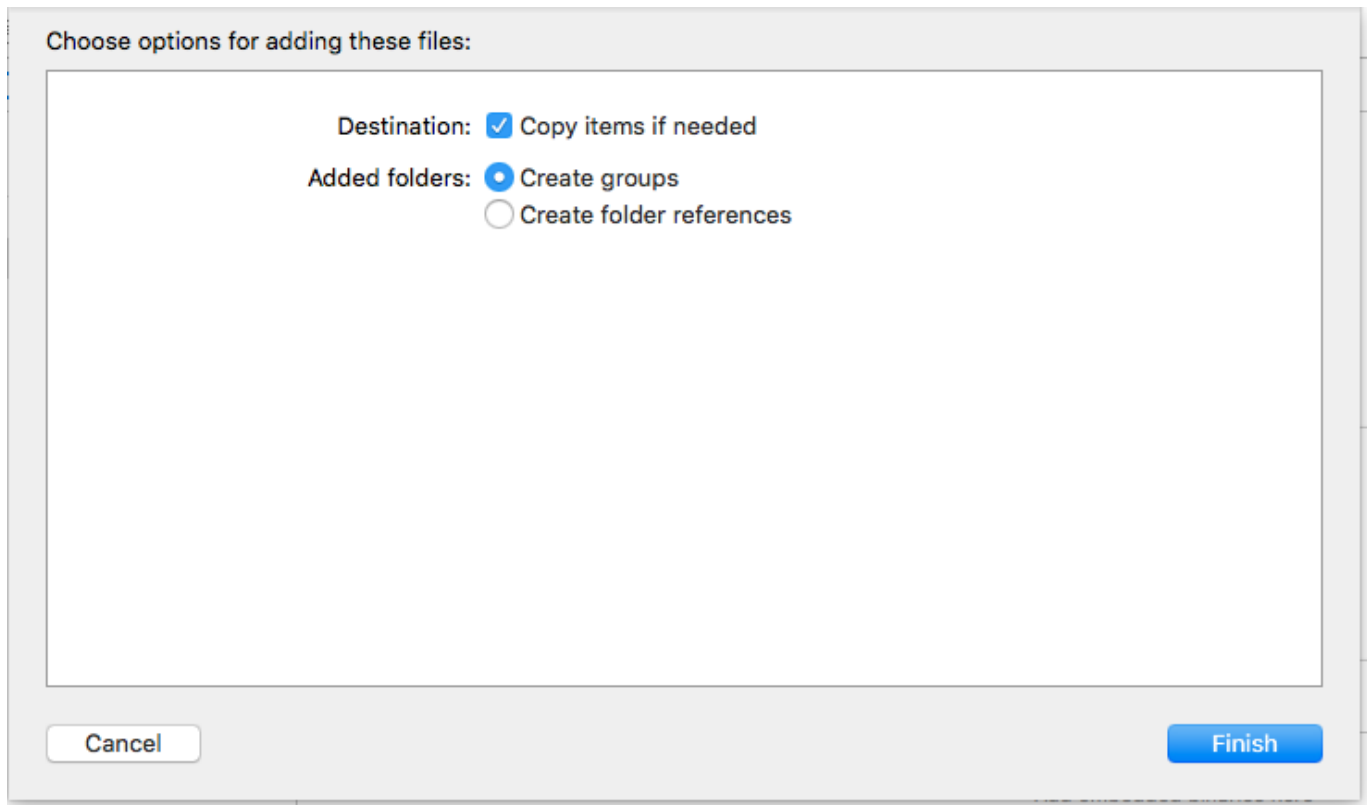

### 3. Add following frameworks inside your application if required

- 1)Security
- 2)CoreLocation
- 3)SystemConfiguration
- 4)JavaScriptCore

### 4) Add Following capability inside your application

- 1) Push Notification
- 2) Keychain
- 3) Background Mode -> Remote Notification
- 4) App Groups

## NetCore SDK Initialization

### 1) Import following file in AppDelegate File

```
#import <NetCorePush/NetCorePush.h>
#import <UserNotifications/UserNotifications.h>
#import <UserNotificationsUI/UserNotificationsUI.h>
```

### 2. Add NetCore Application AppID in support in Finish Launching Methods (AppDelegate file)

```
#define netCore_AppID @"Your App Id which you get from Netcore smartech  
admin panel";
#define appGroup @"<group.com.CompanyName.ProductName>";

[[NetCoreSharedManager sharedInstance] setUpAppGroup:appGroup];

// Set up NetCore Application Id
[[NetCoreSharedManager sharedInstance]
handleApplicationLaunchEvent:launchOptions forApplicationId: netCore_AppID];

//set up push delegate
[NetCorePushTaskManager sharedInstance].delegate = self;

// set up your third party framework initialization process as per their document
```

### 3. Register Device With NetCore SDK (AppDelegate file)

```
- (void)application:(UIApplication*)application
didRegisterForRemoteNotificationsWithDeviceToken:(NSData*)deviceToken{

// Register device token with NetCore SDK

[[NetCoreSharedManager sharedInstance] setDeviceToken:deviceToken];
}
```

#### 4) Handle Remote/Local Notification Delegate Events (AppDelegate file)

```
-(void)application:(UIApplication *)application didReceiveLocalNotification:
(UILocalNotification *)notification{

[[NetCorePushTaskManager sharedInstance] didReceiveLocalNotification:
notification.userInfo];
}

- (void)application:(UIApplication*)application didReceiveRemoteNotification:
(NSDictionary*)userInfo {
if (application.applicationState != UIApplicationStateBackground) {
    [[NetCorePushTaskManager sharedInstance] didReceiveRemoteNotification:
userInfo];
}
}

//Called to let your app know which action was selected by the user for a given
notification.
-(void)userNotificationCenter:(UNUserNotificationCenter* )center
didReceiveNotificationResponse:(UNNotificationResponse* )response
withCompletionHandler:(void(^)(void))completionHandler{

[[NetCorePushTaskManager sharedInstance]
userNotificationdidReceiveNotificationResponse: response];
}
```

#### 5)Handle Deep Linking

```

- (BOOL)application:(UIApplication *)application openURL:(NSURL *)url
sourceApplication:(NSString *)sourceApplication annotation:(id)annotation
{
    //handle deep Link here
    return YES;
}

// PushManagerDelegate Method
-(void)handleNotificationOpenAction:(NSDictionary *)userInfo DeepLinkType:
(NSString *)strType{
    if (strType !=nil ){
        //handle deep Link here
    }
}

```

## 6) Add NetCore Cordova Plugin files ( NetCorePushPlugin.m and NetCorePushPlugin.h files ) in Plugins folder.

You can download from <https://github.com/NetcoreSolutions/Smartech-ios-sdk>

## 7) Configure this plugin to project

add below code to config.xml

```

<platform name="ios">
  <config-file target="config.xml" parent="/*">
    <feature name="NetCorePushPlugin">
      <param name="ios-package" value="NetCorePushPlugin"/> </feature>
    </config-file>
    <header-file src="src/ios/NetCorePushPlugin.h" />
    <source-file src="src/ios/NetCorePushPlugin.m" />
  </platform>

```



**8) Now add below sample events wherever needed in cordova js file (which are inside www/js folder) as per your requirement.**

**For set up ApplicationId**

```
cordova.exec(null, null, "NetCorePushPlugin", "setUpApplicationId",  
[<netCore_AppID>]);
```

**For set up Identity**

```
cordova.exec(null, null, "NetCorePushPlugin", "setUpIdentity",[<yourIdentity>]);
```

**For registration**

```
cordova.exec(null, null, "NetCorePushPlugin", "pushRegistration",  
[<yourIdentity>]);
```

**For login event**

```
cordova.exec(null, null, "NetCorePushPlugin", "pushLogin", [<yourIdentity>]);
```

**For logout event**

```
cordova.exec(null, null, "NetCorePushPlugin", "pushLogout",[]);
```

**For getting Notifications**

```
cordova.exec(null, null, "NetCorePushPlugin", "getNotifications",null);
```

**For activity tracking**

**a) add to cart custom event with custom payload**

```
var addToCartEventId = 2; // example
```

```
var productList = [ { "s^name": 'Nexus 6', "i^prid": 1, "s^price": 199.99, "i^prqt":  
2 }, { "s^name": 'Nexus 5', "i^prid": 2, "s^price": 155.22, "i^prqt": 1 } ];  
cordova.exec(null, null, "NetCorePushPlugin", "sendInAppActivity",  
[addToCartEventId, productList]);
```


**b) For user profile push**

```
var profilePushInfo = { "name": "Tester", "age": "23", "mobile": "32424342" }
```

```
cordova.exec(null, null, "NetCorePushPlugin", "profilePush", [yourIdentity, profilePushInfo]);
```

## Deployment Over Apple Store

Add Following runscript in your application target ,when you are deploying application over apple store,this run script use remove unused architecture in release mode.

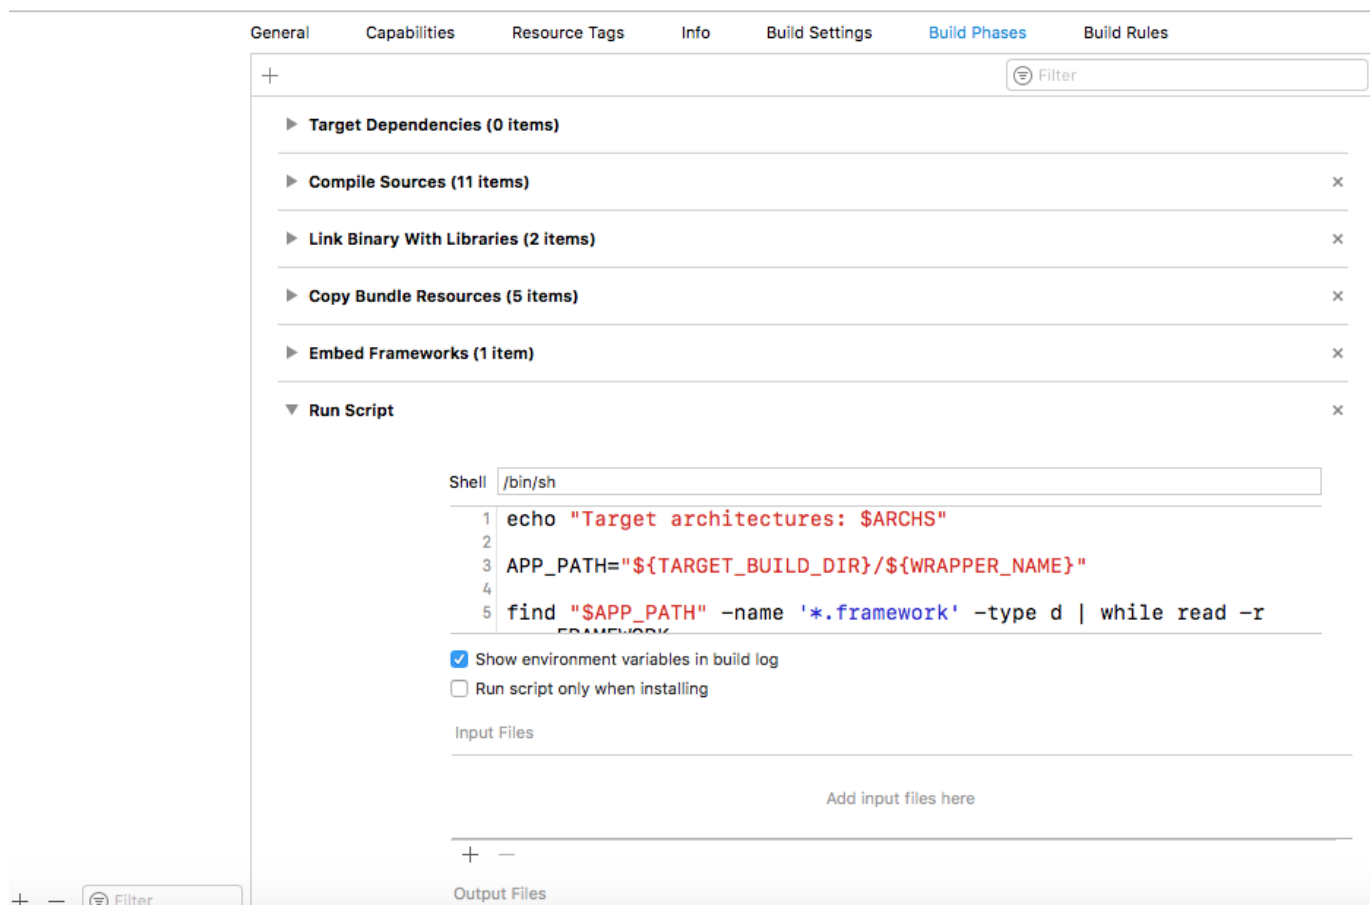

```
APP_PATH="${TARGET_BUILD_DIR}/${WRAPPER_NAME}"
```

```
# This script loops through the frameworks embedded in the application and  
# removes unused architectures.
```

```
find "$APP_PATH" -name '*.framework' -type d | while read -r FRAMEWORK  
do
```

```
    FRAMEWORK_EXECUTABLE_NAME=$(defaults read "$FRAMEWORK/Info.plist"  
CFBundleExecutable)
```

```
    FRAMEWORK_EXECUTABLE_PATH="$FRAMEWORK/  
$FRAMEWORK_EXECUTABLE_NAME"
```

```
    echo "Executable is $FRAMEWORK_EXECUTABLE_PATH"
```

```
    EXTRACTED_ARCHS=()
```

```
    for ARCH in $ARCHS
```

```
    do
```

```
        echo "Extracting $ARCH from $FRAMEWORK_EXECUTABLE_NAME"
```

```
        lipo -extract "$ARCH" "$FRAMEWORK_EXECUTABLE_PATH" -o
```

```
"$FRAMEWORK_EXECUTABLE_PATH-$ARCH"
```

```
        EXTRACTED_ARCHS+=("$FRAMEWORK_EXECUTABLE_PATH-$ARCH")
```

```
    done
```

```
    echo "Merging extracted architectures: ${ARCHS}"
```

```
    lipo -o "$FRAMEWORK_EXECUTABLE_PATH-merged" -create "$  
{EXTRACTED_ARCHS[@]}"
```

```
    rm "${EXTRACTED_ARCHS[@]}"
```

```
    echo "Replacing original executable with thinned version"
```

```
    rm "$FRAMEWORK_EXECUTABLE_PATH"
```

```
    mv "$FRAMEWORK_EXECUTABLE_PATH-merged"  
"$FRAMEWORK_EXECUTABLE_PATH"
```

```
done
```