

Week 6

Session 1

Program 1

Given an array A of sorted integers and another non negative integer k, find if there exists 2 indices i and j such that $A[i] - A[j] = k$, $i \neq j$.

Input Format

1. First line is number of test cases T. Following T lines contain:
2. N, followed by N integers of the array
3. The non-negative integer k

Output format

Print 1 if such a pair exists and 0 if it doesn't.

Example

Input:

```
1
3 1 3 5
4
```

Output:

```
1
```

Input:

1


3 1 3 5

99

Output:

0

Coding

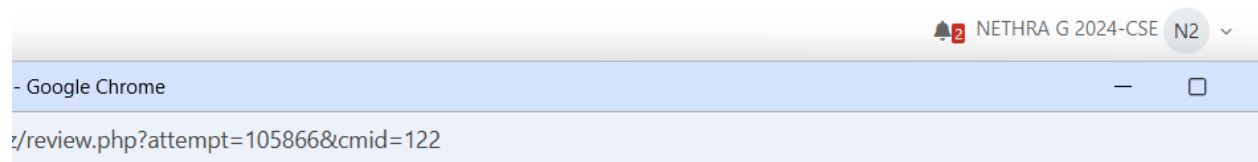

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
2 int main()
3 {
4     int T,d,i,i1,i2,o,z;
5     char c,s;
6     scanf("%d",&T);
7     for(i=0;i<T;i++)
8     {
9         scanf("%d %c",&d,&s);
10        for(i1=0;i1<d;i1++)
11        {
12            z=(s=='W')?0:1;
13            o=(i1%2==z)?0:1;
14            for(i2=0;i2<d;i2++)
15            {
16                c=(i2%2==o)?'W':'B';
17                printf("%c",c);
18            }
19            printf("\n");
20        }
21    }
22 }
23 }
```

Output

	Input	Expected	Got	
✓	1 3 1 3 5 4	1	1	✓
✓	1 3 1 3 5 99	0	0	✓

Passed all tests! ✓

Program 2

Sam loves chocolates and starts buying them on the 1st day of the year. Each day of the year, x , is numbered from 1 to Y . On days when x is odd, Sam will buy x chocolates; on days when x is even, Sam will not purchase any chocolates.

Complete the code in the editor so that for each day N_i (where $1 \leq x \leq N \leq Y$) in array `arr`, the number of chocolates Sam purchased (during days 1 through N) is printed on a new line. This is a function-only challenge, so input is handled for you by the locked stub code in the editor.

Input Format

The program takes an array of integers as a parameter.

The locked code in the editor handles reading the following input from `stdin`, assembling it into an array of integers (`arr`), and calling `calculate(arr)`.

The first line of input contains an integer, T (the number of test cases). Each line i of the T subsequent lines describes the i th test case as an integer, N_i (the number of days).

Constraints

$$1 \leq T \leq 2 \times 10^5$$

$$1 \leq N \leq 2 \times 10^6$$

$$1 \leq x \leq N \leq Y$$

Output Format

For each test case, T_i in arr, your calculate method should print the total number of chocolates Sam purchased by day N_i on a new line.

Sample Input 0

3

1

2

3

Sample Output 0

1

1

4

Explanation

Test Case 0: $N = 1$

Sam buys 1 chocolate on day 1, giving us a total of 1 chocolate. Thus, we print 1 on a new line.


Test Case 1: $N = 2$

Sam buys 1 chocolate on day 1 and 0 on day 2. This gives us a total of 1 chocolate. Thus, we print 1 on a new line.

Test Case 2: $N = 3$

Sam buys 1 chocolate on day 1, 0 on day 2, and 3 on day 3. This gives us a total of 4 chocolates. Thus, we print 4 on a new line.

Coding

 NETHRA G 2024-CSE N2

IS - Google Chrome

iz/review.php?attempt=127740&cmid=178

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
2 int main()
3 {
4     int n;
5     scanf("%d",&n);
6     int a[n],b[n];
7     for(int i=0;i<n;i++)
8     {
9         scanf("%d",&a[i]);
10        b[i]=0;
11        for(int j=1;j<=a[i];j++)
12        {
13            if(j%2!=0)
14            {
15                b[i]+=j;
16            }
17        }
18    }
19    for(int i=0;i<n;i++)
20    {
21        printf("%d\n",b[i]);
22    }
23 }
```

Output

	Input	Expected	Got	
✓	3	1	1	✓
	1	1	1	
	2	4	4	
	3			
✓	10	1296	1296	✓
	71	2500	2500	
	100	1849	1849	
	86	729	729	
	54	400	400	
	40	25	25	
	9	1521	1521	
	77	25	25	
	9	49	49	
	13	2401	2401	
	98			

Passed all tests! ✓

Program 3

The number of goals achieved by two football teams in matches in a league is given in the form of two lists. Consider:

- Football team A, has played three matches, and has scored { 1 , 2 , 3 } goals in each match respectively.
- Football team B, has played two matches, and has scored { 2, 4 } goals in each match respectively.
- Your task is to compute, for each match of team B, the total number of matches of team A, where team A has scored less than or equal to the number of goals scored by team B in that match.
- In the above case:
- For 2 goals scored by team B in its first match, team A has 2 matches with scores 1 and 2.
- For 4 goals scored by team B in its second match, team A has 3 matches with scores 1, 2 and 3.

Hence, the answer: {2, 3}.

Complete the code in the editor below. The program must return an array of m positive integers, one for each $\text{maxes}[i]$ representing the total number of elements $\text{nums}[j]$ satisfying $\text{nums}[j] \leq \text{maxes}[i]$ where $0 \leq j < n$ and $0 \leq i < m$, in the given order.

It has the following:

nums[nums[0],...nums[n-1]]: first array of positive integers

maxes[maxes[0],...maxes[n-1]]: second array of positive integers

Constraints

- $2 \leq n, m \leq 105$
- $1 \leq \text{nums}[j] \leq 109$, where $0 \leq j < n$.
- $1 \leq \text{maxes}[i] \leq 109$, where $0 \leq i < m$.

Input Format For Custom Testing

Input from stdin will be processed as follows and passed to the function.

The first line contains an integer n , the number of elements in nums.

The next n lines each contain an integer describing $\text{nums}[j]$ where $0 \leq j < n$.

The next line contains an integer m , the number of elements in maxes.

The next m lines each contain an integer describing $\text{maxes}[i]$ where $0 \leq i < m$.

Sample Case 0

Sample Input 0

4

1

4

2

4

2
3
5

Sample Output 0

2
4

Explanation 0

We are given $n = 4$, $\text{nums} = [1, 4, 2, 4]$, $m = 2$, and $\text{maxes} = [3, 5]$.

1. For $\text{maxes}[0] = 3$, we have 2 elements in nums ($\text{nums}[0] = 1$ and $\text{nums}[2] = 2$) that are $\leq \text{maxes}[0]$.
2. For $\text{maxes}[1] = 5$, we have 4 elements in nums ($\text{nums}[0] = 1$, $\text{nums}[1] = 4$, $\text{nums}[2] = 2$, and $\text{nums}[3] = 4$) that are $\leq \text{maxes}[1]$.

Thus, the function returns the array $[2, 4]$ as the answer.

Sample Case 1

Sample Input 1

5
2
10
5
4
8
4
3

1
7
8

Sample Output 1

1
0
3
4

Explanation 1

We are given, $n = 5$, $nums = [2, 10, 5, 4, 8]$, $m = 4$, and $maxes = [3, 1, 7, 8]$.

1. For $maxes[0] = 3$, we have 1 element in $nums$ ($nums[0] = 2$) that is $\leq maxes[0]$.
2. For $maxes[1] = 1$, there are 0 elements in $nums$ that are $\leq maxes[1]$.
3. For $maxes[2] = 7$, we have 3 elements in $nums$ ($nums[0] = 2$, $nums[2] = 5$, and $nums[3] = 4$) that are $\leq maxes[2]$.
4. For $maxes[3] = 8$, we have 4 elements in $nums$ ($nums[0] = 2$, $nums[2] = 5$, $nums[3] = 4$, and $nums[4] = 8$) that are $\leq maxes[3]$.

Thus, the function returns the array $[1, 0, 3, 4]$ as the answer.

Coding

Answer: (penalty regime: 0 %)

```
1 #include<stdio.h>
2 int main()
3 {
4     int n,m;
5     scanf("%d",&n);
6     int num[n];
7     for(int i=0;i<n;i++)
8     {
9         scanf("%d",&num[i]);
10    }
11    scanf("%d",&m);
12    int max[m];
13    for(int i=0;i<m;i++)
14    {
15        scanf("%d",&max[i]);
16    }
17    for(int i=0;i<m;i++)
18    {
19        int c=0;
20        for(int j=0;j<n;j++)
21        {
22            if(num[j]<=max[i])
23            {
24                c++;
25            }
26        }
27        printf("%d\n",c);
28    }
29 }
```

Output

	Input	Expected	Got	
✓	4	2	2	✓
	1	4	4	
	4			
	2			
	4			
	2			
	3			
	5			
✓	5	1	1	✓
	2	0	0	
	10	3	3	
	5	4	4	
	4			
	8			
	4			
	3			
	1			
	7			
	8			

Passed all tests! ✓