

## A124 · Genome-Scale Sub-Megabase Chromatin Tracing with DNA-MERFISH

**Presenter:** Peter Ren — Xiaowei Zhuang Lab; Howard Hughes Medical Institute, Department of Chemistry and Chemical Biology, a

**Authors:** Peter Ren, William F. Li, Cosmos Yuqi Wang, Xiaowei Zhuang

**Session:** Day 2 · Fri Oct 2, 2026 · 2:15–4:15 PM

The 3D organization of the genome plays a critical role in gene transcription. While sub-megabase single-cell datasets collected using high-throughput chromosome conformation capture (Hi-C) have identified on the order of thousands of differential topologically-associated domain (TAD) boundaries and genomic loops at the pseudo-bulk level across cell types, these datasets are limited by a sparsity problem where incomplete single-cell contact maps often need to be filled through imputation heuristics before further analysis, preventing thorough quantification of cell-to-cell variations. On the other hand, imaging-based combinatorial chromatin tracing methods such as multiplexed error-robust fluorescence in situ hybridization (MERFISH) applied to DNA has been shown to reach up to ~80% detection efficiency in single cells at ~1 Mbp resolution, a regime too large to identify most TADs and loops. We aim to extend DNA-MERFISH towards targeting an order-of-magnitude larger number of genomic loci, thus reaching sub-megabase resolution. Using improved MERFISH single-cell chromatin traces, we aim to both identify novel cell-type-specific features relevant to biological function as well as quantify the degree of variation of domains and loops across single cells.

# Genome-Scale Sub-Megabase Chromatin Tracing with DNA-MERFISH

Peter Ren<sup>\*1,2</sup>, William F. Li<sup>1,2,3</sup>, Cosmos Yuqi Wang<sup>1</sup>, Xiaowei Zhuang<sup>1</sup>

<sup>1</sup>Howard Hughes Medical Institute, Department of Chemistry and Chemical Biology, and Department of Physics, Harvard University; <sup>2</sup>Graduate Program in Biophysics, Harvard University; <sup>3</sup>Harvard-MIT MD-PhD Program, Harvard Medical School

The 3D organization of the genome plays a critical role in gene transcription. While sub-megabase single-cell datasets collected using high-throughput chromosome conformation capture (Hi-C) have identified on the order of thousands of differential topologically-associated domain (TAD) boundaries and genomic loops at the pseudo-bulk level across cell types, these datasets are limited by a sparsity problem where incomplete single-cell contact maps often need to be filled through imputation heuristics before further analysis, preventing thorough quantification of cell-to-cell variations. On the other hand, imaging-based combinatorial chromatin tracing methods such as multiplexed error-robust fluorescence *in situ* hybridization (MERFISH) applied to DNA has been shown to reach up to ~80% detection efficiency in single cells at ~1 Mbp resolution, a regime too large to identify most TADs and loops. We aim to extend DNA-MERFISH towards targeting an order-of-magnitude larger number of genomic loci, thus reaching sub-megabase resolution. Using improved MERFISH single-cell chromatin traces, we aim to both identify novel cell-type-specific features relevant to biological function as well as quantify the degree of variation of domains and loops across single cells.

## MERFISH Codebook Constraints:


- (1) greater than 10,000 loci are targeted (*sub-Mbp genome-wide resolution*)

(2) no targets likely to be within ~500 nm share a "1" bit in a given round (*diffraction limit*)


(3) all codewords have minimum Hamming Distance 4 from all other codewords (*error correction*)

(4) the number of bits per codewords (number of imaging rounds) is minimized (*scalability*)

Adapted from Su et al., Cell, 2020

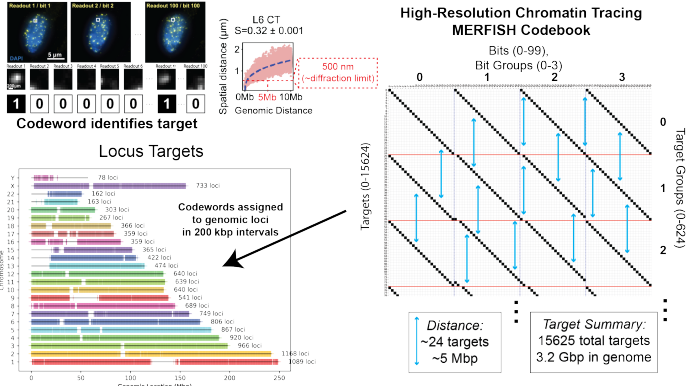

Median distance matrices, 800-kbp resolution, RPE-1, n = 1,562 cells



Bulk Hi-C contact frequency maps, 800-kbp bins, RPE-1 (Darrow et al., PNAS, 2016)

