

Getting Started with Dashboards and NRQL

Phil Weber
New Relic University

© 2024 New Relic, Inc. All rights reserved.




Agenda

- 01 Data types and Data Explorer
- 02 NRQL
- 03 Dashboard fundamentals
- 04 Chart types
- 05 Advanced dashboard techniques

© 2025 New Relic, Inc. All rights reserved


New Relic Platform

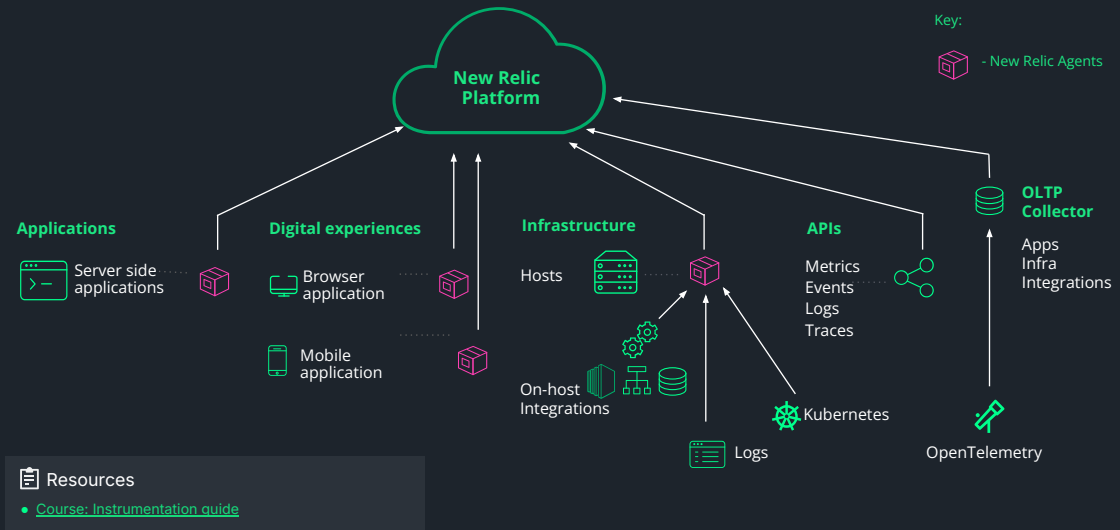

© 2025 New Relic, Inc. All rights reserved.



Metrics vs. Events

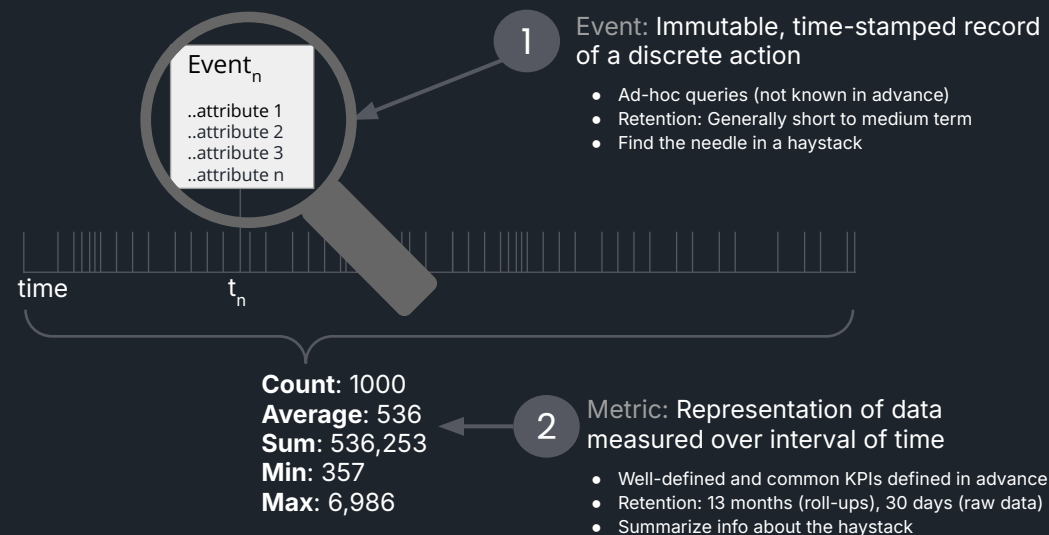


© 2025 New Relic, Inc. All rights reserved.



Common event types

`SELECT` function(attribute) `FROM` EventType `WHERE` condition `FACET` group by

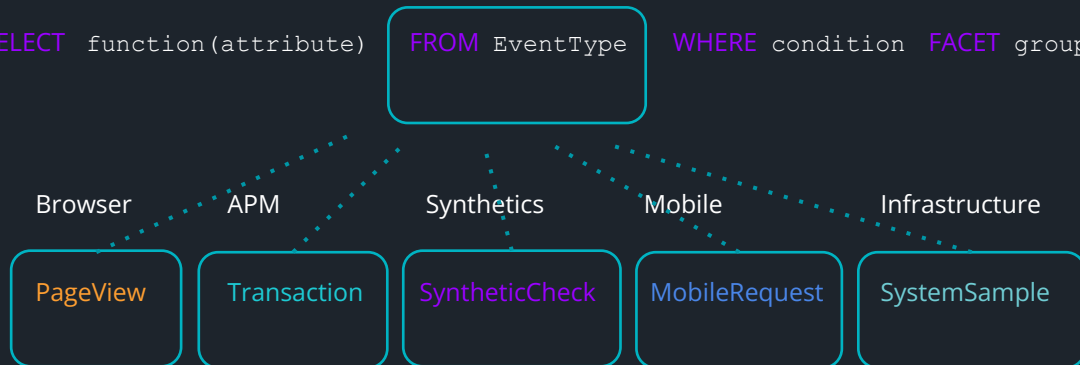

```
SELECT count(*) FROM PageView FACET PageUrl SINCE 1 day ago
```

7

5 mins

Lab: Data Explorer

1 Build these queries by selecting the following options:

- Event type: **Transaction** > **Count**, **name** > **FACET**
This shows throughput for different Transactions
- Event type: **Transaction** > **Count**, **appName** > **FACET**
This shows throughput for different Applications
 - Try a different chart type (Bar chart, Pie chart, etc.)
- Event type: **Transaction**, **duration** > **max**, **name** > **FACET**
This shows slowest Transactions
- Event type: **PageView**, **duration** > **max**, **pageUrl** > **FACET**
This shows slowest Pages. Try a Bar chart and filter to a pageUrl by clicking one from below

2 Try **PageView** > **Raw data** and explore the attributes of the PageView event type

9

NRQL syntax

SELECT ... FROM

SELECT function(attribute) **FROM** EventType **WHERE** condition **FACET** group by

SELECT count(*) **FROM** Transaction **WHERE** appName = 'Frontend' **FACET** name
FROM Transaction **SELECT** count(*) **WHERE** appName = 'Frontend' **FACET** name

5 mins

Lab: Explore your data

Try these queries

Select Query Your Data

1 SHOW EVENT TYPES

Which event types are reporting?

2

SELECT keyset() **FROM** Transaction

Explore the attributes. Do you think any of them are custom / business attributes?

3

SELECT count(*) **FROM** Transaction

Aggregate the data to retrieve a single value

4

SELECT count(*) **FROM** Transaction **FACET** appName

Select DISTINCT values (GROUP BY) using FACET

Look up default event types and attributes in the [New Relic data dictionary](#)

NOTE: You can't FACET until you aggregate

☒ **SELECT** * **FROM**

☒ **SELECT** count(*)

5 mins

Lab: Query Builder

NRQL mode

- 1 Add a new chart and type one of these queries in the query builder and explore the results. Choose *Table* view and add one to your dashboard.

- `SELECT * FROM Transaction`
- `SELECT * FROM PageView`
- `SELECT * FROM SystemSample`

- 2 Aggregate the data with a `count(*)` function, and group it using the `FACET` clause. Add this chart to your dashboard, for example:

- `SELECT count(*) FROM Transaction FACET appName`

- 3 Try the same query but try different `FACET` clauses (for example: `name`, `httpResponseCode`, etc)

- `SELECT count(*) FROM Transaction FACET httpResponseCode`

© 2025 New Relic, Inc. All rights reserved

new relic 12

10 mins

Lab: More advanced NRQL queries

Try some of these queries in the NRU Training account

Use these event types:

- 1 `PageView`
 - What is the worst (**max**) page load **duration** grouped (**FACET**) by `pageUrl`, `countryCode`, `userAgentName`
- 2 `Transaction`
 - **Count** `http.statusCodes` WHERE `http.statusCode > '300'` and group the results by `appName` and `http.statusCode`
- 3 `Transaction`
 - Create a table of average response time (**duration**) labelled AS 'Response time', and average **databaseDuration** AS 'Database time', grouped (**FACET**) by `name` and `request.method`
- 4 `PageView`
 - Using `count(*)`, create a pie chart showing the breakdown of different browsers (**userAgentName**) and **deviceType**
- 5 `SystemSample`
 - Show average **cpuPercent** by `hostname`

© 2025 New Relic, Inc. All rights reserved

new relic