

Keep the Proof State Live: Snapshotting for Efficient Tactic Search in Lean 4

Austin Shen
University of Michigan
austinshen@umich.edu

Yunong Shi
University of Michigan

May 26, 2026

Abstract

Automated theorem proving systems built on Lean 4 increasingly rely on parallel tactic search over partially specified proofs, such as those generated by Draft–Sketch–Prove (DSP) pipelines. In current systems, each search branch reconstructs a proof state by re-running elaboration (Lean’s process of type-checking and resolving implicit arguments), leading to substantial per-branch overhead. In Lean 4 with Mathlib, this cost has two components: (1) *import loading*, which deserializes pre-compiled libraries (≈ 60 s per branch); and (2) *theorem-body elaboration*, which re-checks the theorem context up to the target goal (estimated 18–735 s depending on proof complexity). Together, these account for $>99\%$ of per-branch wall time in a standard single-machine setting, making portfolio-based search (trying a fixed set of candidate tactics in parallel across each proof hole) impractical at scale.

We observe that this overhead arises from a mismatch between the structure of proof search and its execution model: branching is implemented via repeated reconstruction of proof states rather than direct reuse. To address this, we introduce *proof-state snapshotting*, which captures the elaborated proof state once and reuses it across branches. We implement this mechanism via a small extension to the Lean 4 language server, enabling lightweight forking of proof states for parallel tactic execution.

Across 48 miniF2F-v2 problems (45 hand-crafted prove-phase benchmarks and 3 full end-to-end runs), our approach achieves a **5.6–50 $\times$** wall-time speedup over the standard fallback (average **14 $\times$** , median **9.7 $\times$** across the 45 hand-crafted benchmarks). Speedup increases with the number of proof branches. Tactic execution itself accounts for only a few ms to 500 ms per branch in typical cases (95th percentile 289 ms; `aesop` reaches several seconds on hard goals); the remaining $>99\%$ of runtime is elaboration overhead that our approach eliminates.

Our method is orthogonal to import-level caching (e.g., Kimina Lean Server [Dos Santos et al., 2025]), which avoids repeated import loading but not theorem-body elaboration. By eliminating both costs within a theorem, proof-state snapshotting provides a complementary mechanism for scaling parallel proof search. The patched Lean binary and the Snapshot-DSP pipeline will be released as open source at https://github.com/A2DR1/Lean_Snapshot.

1 Introduction

Automated formal theorem proving with large language models has advanced rapidly [Yang et al., 2023, Jiang et al., 2023, Song et al., 2025, Kumarappan et al., 2025, Cao et al., 2025, The Harmonic Team, 2025, Dos Santos et al., 2025, Aniva et al., 2024, Kripner et al., 2025], with systems achieving 88.9% on miniF2F [DeepSeek-AI, 2025] and IMO-level performance [The Harmonic Team, 2025]. A common pattern in these pipelines is *portfolio-based search*: fix a set of candidate tactics and try each one in parallel across every proof hole. The bottleneck is not tactic execution—which takes a few ms to 500 ms in typical cases—but *branch startup*: the cost of reconstructing proof state from scratch on every attempt.

In Lean 4 with Mathlib, branch startup has two compounding components. *Import loading* deserializes pre-compiled `.olean` libraries (≈ 60 s, constant across problems). *Theorem-body elaboration* type-checks the theorem header and all intermediate steps up to the `sorry` position (estimated 18–735 s, scaling with proof

complexity).¹ Together these consume >99% of per-branch wall time. A portfolio of 7 tactics applied to 4 `sorry` holes yields 28 branches—roughly 17.5 minutes of pure overhead on simple theorems (with $W = 2$ concurrent workers; 35 minutes if fully sequential), and hours on complex ones. At the scale of DSP-style pipelines, which may propose 100 draft candidates per theorem, this makes portfolio-based search infeasible on a single machine.

The root cause is a mismatch between how the Lean server manages state internally and how external systems access it. The Lean server (`lean -server`) already computes and caches the elaborated proof state at every source position—this is what powers live diagnostics in VS Code and Emacs. That state is never discarded between edits; it is simply not exposed to external callers. Every branch therefore reconstructs state the server already holds.

We address this with *proof-state snapshotting*. We extend `Lean.Server.FileWorker` with three JSON-RPC methods—`dspSnapshotPing`, `dspSnapshotCapture`, and `dspSnapshotBranch`—that make the server’s internal elaboration snapshot an externally reusable branching substrate. The `Environment` (all Mathlib constants and type-class instances, $\approx 2\text{--}4$ GB) is immutable and shared across branches by reference; only the `MetavarContext` (open proof obligations, $\approx \text{KB}$) is copied per branch. This reduces per-branch memory from $O(\text{GB})$ to $O(\text{KB})$, removing RAM as a parallelism bottleneck: the fallback requires ≈ 3 GB per concurrent branch (limiting a typical laptop to $W \approx 2$ workers), whereas snapshotting allows all N branches (equivalently $B = H \times C$) to run in parallel regardless of N or available RAM. Mathlib loads once per theorem; after capture, all N branches are dispatched in parallel and the full set adds only 4–13 s of combined LSP overhead and tactic execution on top of the one-time capture cost. Figure 1 illustrates the difference.

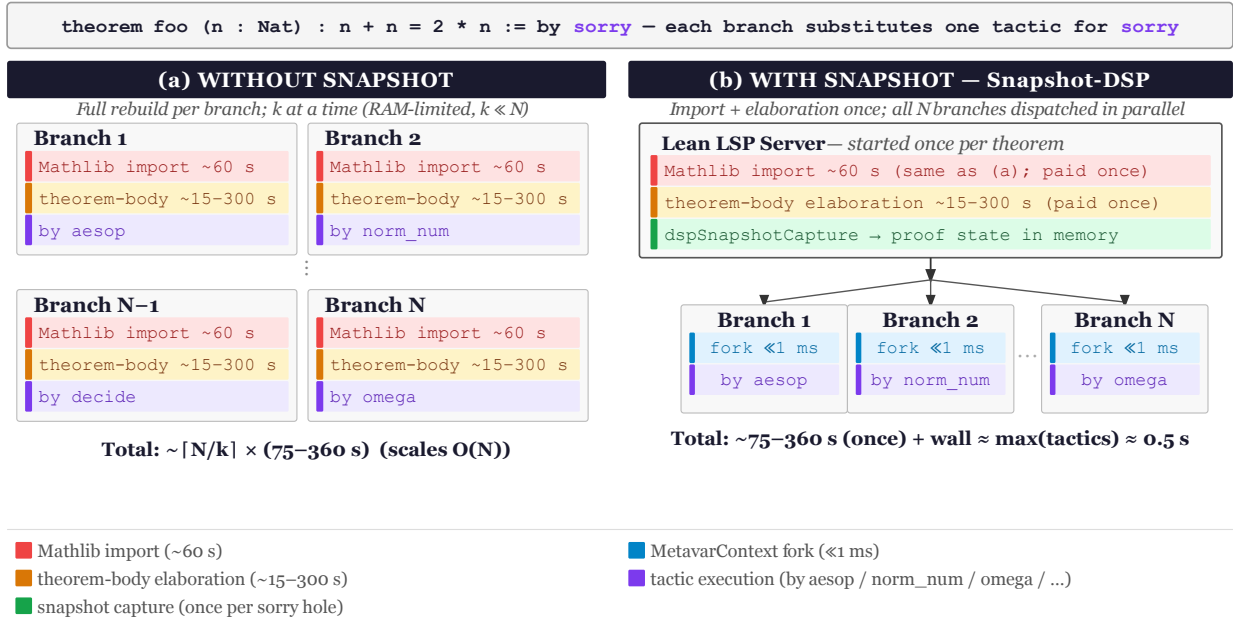


Figure 1: **(a) Fallback (Level 0):** every branch independently reloads Mathlib and re-elaborates the theorem body (75–795 s per branch depending on theorem complexity; 75 s for simple theorems, up to 795 s for the hardest benchmark), yielding $O(N)$ total overhead. The diagram shows $W = 2$ concurrent workers; in general $W \approx \lfloor \text{RAM}/3 \text{ GB} \rfloor$, so $W \ll N$ on any single machine. **(b) Snapshot-DSP (Level 2):** import loading and elaboration are paid once; all N branches are dispatched in parallel and together add only 4–13 s in LSP overhead and tactic execution on top of the one-time capture. The tactic portfolio $\{\text{aesop}, \text{norm_num}, \text{decide}, \text{omega}, \dots\}$ is a fixed, statically dispatched set—every tactic is tried on every hole independently and simultaneously.

¹The 18 s lower bound is $\min(\text{native_s}) - T_{\text{import}} \approx 78 \text{ s} - 60 \text{ s}$ (using estimated $T_{\text{import}} \approx 60 \text{ s}$), from the simplest benchmark problem (`mathd_algebra_209`). The 735 s upper bound is back-computed from `mathd_numbertheory_328` (28 branches, $W = 2$ workers): $\lceil 28/2 \rceil \times (T_{\text{import}} + T_{\text{body}}) = 11,127 \text{ s} \Rightarrow T_{\text{body}} \approx 735 \text{ s}$.

Positioning. Level 0 systems (stock DSP via `lake build`) fully rebuild per branch. Level 1 systems (e.g., Kimina [Dos Santos et al., 2025]) cache the post-import `Environment` across theorems, eliminating import loading but still paying theorem-body elaboration (estimated 18–735 s) per branch. This work contributes **Level 2**: snapshotting the proof state at the `sorry` boundary, after theorem-body elaboration, eliminating both costs. Levels 1 and 2 are complementary and can be combined in a persistent-server configuration, which we leave to future work. Separately, Lean already supports intra-branch backtracking via `SavedState` checkpoints, used by Pantograph [Aniva et al., 2024] and Aesop [Limperg and From, 2023]; this mechanism operates within a single branch and is orthogonal to the branch-dispatch cost that snapshotting addresses.

Results. Across 48 miniF2F-v2 problems, proof-state snapshotting achieves a **5.6–50×** wall-time speedup over the fallback (average **14×**, median **9.7×** across the 45 hand-crafted benchmarks). Speedup scales monotonically with branch count, confirming that the fixed elaboration cost amortizes as the portfolio grows.

Contributions.

1. **System.** A proof-state snapshotting system comprising Lean 4 LSP extensions for capturing and reusing elaborated proof states (`MetavarContext` / `LocalContext`) across branches, and a Python orchestration layer for dispatching tactic portfolios over snapshot-based execution (§3).
2. **Evaluation.** Speedup measurements across 48 miniF2F-v2 problems, with cost decomposition confirming that >99% of per-branch wall time is elaboration overhead that snapshotting eliminates (§4).
3. **Release.** We will release the Snapshot-DSP pipeline, patched Lean binary, and evaluation suite as open source at https://github.com/A2DR1/Lean_Snapshot.

2 Related Work

LLM-guided theorem proving. A broad family of systems treat Lean as an external black box, submitting tactic strings and receiving goal states via LSP or a REPL wrapper. Jiang et al. [2023] introduce the Draft–Sketch–Prove pipeline (originally for Isabelle/Sledgehammer); Yang et al. [2023] build LeanDojo with retrieval-augmented proving; Wang et al. [2024] augment search with a growing lemma library; DeepSeek-AI [2025] achieves 88.9% on miniF2F with a 671B MoE model. Cao et al. [2025] revisit DSP for reasoning-era models, scaling the sketch generation and parallel prove phase. To our knowledge, none of these systems identify or address Level 2 as a design point; all pay per-branch elaboration overhead in the Prove phase.

Large-scale parallel proof search. The Harmonic Team [2025] achieve gold-medal performance on the International Mathematical Olympiad using Monte Carlo Graph Search with learned policies and value functions, deployed across a massive CPU cluster via a custom REPL service with compressed state serialization. This system operates at Level 0: branch expansions are dispatched to independent stateless backends that reconstruct the full proof state on every request; the paper’s compressed state serialization refers to the per-request payload, not a cached elaboration artifact. Our elaboration-level snapshots are complementary: Level 2 forking could provide Aristotle-style search with pre-elaborated snapshots from the IDE’s own server, eliminating startup cost without changing the search algorithm.

Proof environment caching. The closest prior work is the Kimina Lean Server [Dos Santos et al., 2025], which maintains an LRU cache keyed on import headers: if a new verification request shares the same `import` prefix as a cached session, the pre-loaded Lean process is reused, reporting a **1.94×** speedup on NuminaMath-LEAN. Kimina and Snapshot-DSP are complementary: Kimina caches the post-import state *between theorems* (Level 1); we fork the post-elaboration state *between branches of the same theorem* (Level 2). Even inside a Kimina-style persistent server, every branch still pays theorem-body elaboration—the cost our snapshot eliminates. The two mechanisms compose, and our current implementation does not yet exploit Kimina-style inter-theorem caching, leaving that as future work. LeanInteract [Poiroux et al., 2025] takes a complementary approach: a persistent Python-facing REPL that keeps a single Lean process

alive across queries, enabling low-latency proof attempts by submitting complete proofs directly to a warm environment. Unlike Snapshot-DSP, LeanInteract is designed for sequential branch dispatch rather than parallel fork-and-check; the two designs trade off per-branch latency against parallelism and single-theorem startup cost.

Proof state management. Pantograph [Aniva et al., 2024] provides a machine-to-machine Lean interface that exposes proof states as structured data (goal factorization, state deletion) rather than opaque LSP responses. This is closer to the internal representation than raw LSP, but Pantograph still dispatches tactics sequentially against a single state: it does not capture a fixed proof state and fork it for a parallel tactic portfolio, which is the operation Level 2 requires. LeanTree [Kripner et al., 2025] decomposes complex goals into independent sub-branches via a factorized state representation, reporting a $3.4\times$ accuracy improvement over black-box single-branch rollout on miniF2F with Llemma-7B. LeanTree addresses goal structure (how a single proof state is split into sub-goals), whereas Snapshot-DSP addresses branch dispatch (how cheaply a fixed proof state is replicated across a tactic portfolio); the two approaches are orthogonal. Aesop [Limperg and From, 2023] is a white-box best-first tactic that uses `SavedState` checkpoints internally for backtracking within a single branch—the intra-branch axis described in §1. It is one of the seven tactics in our portfolio, and its internal use of `SavedState` is orthogonal to and unaffected by the Level 2 snapshot.

Lean 4 parallel elaboration. Lean 4.19 (May 2025) adds parallel elaboration of theorem bodies, allowing the compiler to type-check multiple top-level definitions concurrently during a build (groundwork was laid across releases 4.16–4.18). This is designed for batch compilation (`lake build` across a project), not for runtime proof-state forking in proof search: it does not allow an external client to capture or branch an in-progress elaboration. Our snapshot mechanism addresses this gap at runtime and could be upstreamed.

3 Method

The Prove phase operates as a five-step pipeline. First, the Python orchestrator pings the Lean server to detect snapshot support; if unavailable, it falls back to `lake build` per branch. Second, it finds all `sorry` positions in the LLM-generated sketch by parsing the source file. Third, for each `sorry` position it captures a snapshot—a handle to the elaborated proof state at that point. Fourth, it branches by sending all tactic configs for a given snapshot in a single batch RPC call; the Lean server fans them out in parallel using Lean’s work-stealing task scheduler (`IO.asTask`), so wall time for the branch step is approximately $\max(\text{branch costs})$ rather than their sum. Fifth, it collects results: a theorem is proved when every hole is closed by at least one tactic. The following subsections describe the two main technical components: the Lean-side snapshot primitives (§3.1) and how they integrate with the surrounding DSP pipeline (§3.2).

3.1 Snapshot Capture and Branch Execution

Background. The Lean server (`lean -server`) maintains a `FileWorker` per open document. As elaboration proceeds, the worker produces a chain of `Snapshot` objects, each recording the elaboration state at a source position. A snapshot holds three components: the `Environment` (all loaded constants and type-class instances), the `MetavarContext` (open proof obligations), and the `LocalContext` (local variable bindings). In a standard IDE workflow, these snapshots exist already—the server uses them to avoid re-elaborating unchanged lines when the user edits a file. Snapshot-DSP repurposes this existing machinery for proof search.

Three new RPCs. We extend `Lean.Server.FileWorker` with three JSON-RPC handlers, registered at server boot before any user document is opened:

`$/lean/dspSnapshotPing` Capabilities handshake; returns `{"ok": true}` if snapshot support is available, allowing the Python orchestrator to select the native path or fall back to `lake build`.

`$/lean/dspSnapshotCapture` Given a file URI and a `(line, character)` position of a `sorry` token, blocks until elaboration reaches that point, records a snapshot reference, and returns a stable `snapshotId` string.

`$/lean/dspSnapshotBranch` Given a `snapshotId` and an array of branch configs (each specifying a tactic string), spawns one `IO.asTask` per branch using Lean’s work-stealing scheduler, substitutes each tactic for `sorry`, runs it against the captured goal state, and returns an array of `{"ok": bool, "error": string|null, "cpuSeconds": float}`. All branches receive an independent copy of the `MetavarContext`; the shared `Environment` (Mathlib, $\approx 2\text{--}4$ GB) is read-only and never copied, so spawning a branch is essentially free.

Why forking is cheap. Lean’s proof state has two components with very different sizes and mutability. The `Environment`—all Mathlib constants, type-class instances, simp sets, and attribute tables—is immutable and approximately 2–4 GB; it is shared across all branches by reference and never copied. The `MetavarContext`—the open metavariable assignments for the current proof—is the only mutable component and is typically a few kilobytes. Forking therefore costs only a `MetavarContext` copy. Because branches are isolated by construction, the server runs all N branches in parallel via `IO.asTask`. In practice, for a 7-tactic portfolio on a simple arithmetic theorem, branch-dispatch wall time is ≈ 0.58 s ($\approx 1.20\times$ the slowest branch at 0.49 s), versus a sequential prediction of 1.43 s ($= \sum \text{branch CPU times}$)—a **2.5** $\times$ reduction in branch-dispatch latency.

Relationship to SavedState. Both Level 2 snapshots and Lean’s tactic-level `SavedState` record the same underlying proof state (open goals, local variable bindings, and metavariable assignments). The difference is when and why: `SavedState` captures between tactic steps to support intra-branch backtracking within a single sequential search attempt; Level 2 captures at a `sorry` boundary to support parallel dispatch across many independent branches. Lean’s existing `SavedState` machinery is therefore orthogonal to and unaffected by the Level 2 snapshot.

Distribution. The patched binary (toolchain: `leanprover/lean4:v4.25.1`) is built from a fork of the Lean 4 source tree and distributed via `elan`; the `lean-toolchain` file in `examples/minif2f_workspace` points to the patched binary. Standard Lean installations are unaffected.

3.2 Integration with the DSP Pipeline

Sketch generation. The Sketch LLM (GPT-4.1-mini) receives the informal draft and formal theorem statement and returns a complete Lean 4 module with sub-goals and `sorry` holes. A post-processing step splices the exact original formal statement header into the LLM output before it is passed to the Lean server, preventing Unicode mangling of identifiers such as $\mathbf{h}_1$ or $\mathbb{R}$ with ASCII approximations that Lean would reject.

Tactic portfolio. The default portfolio contains seven standard Lean 4 tactics: `aesop` [Limperg and From, 2023], `norm_num`, `omega`, `ring`, `linarith`, `decide`, and `simp`. Each is dispatched as a direct tactic call via `dspSnapshotBranch`; the portfolio is easily extended.

Fallback path. When `dspSnapshotPing` does not return `ok`—because the user’s Lean installation is unpatched—the orchestrator falls back transparently to `lake build` per branch, writing each tactic variant to a separate copy of the project directory. The fallback produces identical results at $\mathcal{O}(B)$ elaboration cost rather than $\mathcal{O}(1)$.

4 Evaluation

4.1 Setup

We evaluate on 48 problems from miniF2F-v2 [Osmanov et al., 2025] spanning number theory, algebra, and competition mathematics (AMC/AIME/IMO). For three problems the full DSP pipeline (LLM Draft + LLM Sketch + Prove) is run end-to-end using GPT-4.1-mini; for the remaining 45 problems, hand-crafted valid

Lean 4 sketches with 1–5 `sorry` holes are used to isolate the Prove-phase wall-time comparison. 49 hand-crafted sketches were initially constructed; 4 failed `lake build` due to elaboration errors unrelated to the tactic portfolio and are excluded, yielding 45 valid Prove-phase benchmarks. The hand-crafted sketches are designed so that at least one portfolio tactic closes each hole; both paths run the same complete branch set, so the wall-time comparison measures overhead reduction uniformly across all 45 problems regardless of per-problem proof outcome. **These benchmarks measure the speed of the tactic search infrastructure, not proof discovery.** End-to-end proof-discovery accuracy is addressed only by the three full DSP runs. All experiments run on a MacBook Pro (Apple M-series, 8 GB RAM, macOS) with the `dsp-patched` Lean binary and Lean toolchain `leanprover/lean4:v4.25.1`. Each problem is timed twice—once with native snapshots preferred and once with fallback (`lake build` per branch) forced—and wall times are recorded. Fallback concurrency is bounded by available memory (8 GB); effective throughput is approximately 2 concurrent lake builds ($W \approx 2$) for the 45 hand-crafted benchmarks. The three end-to-end DSP fallback runs were executed with $W=1$ (sequential) to reflect realistic deployment conditions where a single user runs the full pipeline. Both native and fallback paths fail identically on the excluded inputs (e.g., malformed `have` steps that Lean rejects before reaching any `sorry` hole), so their exclusion does not introduce selection bias.

4.2 Main Results

Table 1 reports results aggregated by `sorry`-hole count. A key finding is that speedup scales monotonically with hole count: from $\sim 7.9\times$ at 1 hole to $\sim 30\times$ at 5 holes, confirming that the fixed elaboration cost is amortized across an increasing number of branches.

Table 1: Wall-time comparison: native snapshot engine vs. fallback (`lake build` per branch). H = `sorry` holes; $B = H \times 7$ branches. Top section: full end-to-end DSP runs (LLM Draft + Sketch + Prove). Bottom section: aggregated results over 45 hand-crafted Prove-phase benchmarks, grouped by hole count. Speedup range shows min–max within each group.

Problem / Group		H	B	Avg Native (s)	Avg Fallback (s)	Speedup
<i>Full DSP pipeline (GPT-4.1-mini)</i>						
<code>mathd_numbertheory_345</code>		5	35	132.8	2,641.4	19.9 $\times$
<code>mathd_numbertheory_3</code>		3	21	116.2	1,572.4	13.5 $\times$
<code>mathd_algebra_478</code>		4	28	119.9	1,579.6	13.2 $\times$
<i>Prove-phase benchmark (45 hand-crafted sketches, grouped by hole count)</i>						
1 hole	(5 problems)	1	7	196	1,537	7.9 $\times$ (6.3–9.6 $\times$)
2 holes	(19 problems)	2	14	136	1,291	9.4 $\times$ (5.6–19.9 $\times$)
3 holes	(11 problems)	3	21	131	1,811	13.8 $\times$ (6.5–20.2 $\times$)
4 holes	(7 problems)	4	28	125	3,478	24.6 $\times$ (13.1–50.0 $\times$)
5 holes	(3 problems)	5	35	141	4,436	29.8 $\times$ (20.1–45.2 $\times$)
Average (all 45)		2.6	18.5	140	1,995	14.0 $\times$

4.3 Cost Breakdown

Table 2 decomposes the per-branch cost across representative evaluated problems. Tactic CPU is measured from the `cpuSeconds` field returned by the Lean server inside `dspSnapshotBranch`; overhead fraction is $(T_{\text{fallback}} - T_{\text{tactic CPU}})/T_{\text{fallback}}$.

Tactic execution accounts for **<0.1%** of the fallback per-branch cost on average—the few ms to 500 ms of actual proof search is dwarfed by the elaboration overhead that snapshots eliminate entirely.

Import loading vs. theorem-body elaboration. The per-branch fallback cost decomposes into two phases: import loading (≈ 60 s, constant across problems) and theorem-body elaboration (estimated 18–735 s, scaling with proof complexity), together accounting for **>99%** of per-branch wall time. Import-level caching (e.g., Kimina [Dos Santos et al., 2025]) eliminates only import loading; the per-branch speedup it

Table 2: Per-branch timing decomposition across representative problems. Tactic CPU is the Lean-server-reported proof-search time per branch. Overhead is Lean server startup + Mathlib elaboration, which snapshots eliminate. Top section: full end-to-end DSP runs; bottom: Prove-phase only.

Problem	Branches	Tactic CPU (ms)	Native/branch (s)	Overhead%
<i>Full DSP pipeline (LLM Draft + Sketch)</i>				
mathd_numbertheory_3	21	44	5.5	99.9%
mathd_numbertheory_345	35	39	3.8	99.9%
mathd_algebra_478	28	64	4.3	99.9%
<i>Prove-phase benchmark (hand-crafted sketches)</i>				
algebra_squineq_at2malt1	14	50	5.7	99.9%
amc12b_2021_p3	28	54	3.1	99.9%
mathd_algebra_137	14	62	7.0	99.9%
mathd_algebra_171	14	31	7.4	99.9%
mathd_algebra_176	14	25	12.7	100%
mathd_algebra_33	21	46	3.9	99.9%
mathd_algebra_398	21	51	6.2	99.9%
mathd_algebra_419	21	28	7.6	99.9%
mathd_numbertheory_12	14	54	7.3	99.9%
mathd_numbertheory_175	21	32	3.8	99.9%
mathd_numbertheory_299	14	27	13.2	100%
mathd_numbertheory_353	14	39	6.6	99.9%
mathd_numbertheory_447	14	77	11.0	99.9%
Average (representative 16)	19.2	45	6.8	99.9%

provides is $(T_{\text{import}} + T_{\text{body}})/T_{\text{body}}$, which ranges from $\sim 1.1\times$ on hard theorems (where $T_{\text{body}} \gg T_{\text{import}}$) to $\sim 5\times$ on simple ones (where $T_{\text{body}} \approx 15$ s, giving $(60 + 15)/15 = 5\times$). Our snapshot captures state *after both phases*, eliminating both entirely and yielding **5.6–50 $\times$** . The advantage widens with problem difficulty: where theorem-body elaboration reaches 735 s, import caching is nearly irrelevant, while our projected speedup exceeds $\sim 100\times$ for portfolios of $B \gtrsim 100$ branches (consistent with DSP-scale runs of 100 draft candidates).

Levels 1+2 combined vs. Level 1 alone. Import-level caching eliminates T_{import} across branches but leaves per-branch theorem-body elaboration (T_{body}) untouched. Our current implementation already eliminates *both* phases per branch via proof-state snapshotting, but pays T_{import} once per theorem (on LSP startup). A *persistent-server* variant—keeping the LSP session alive across a batch of N theorems so that import is paid only once for the entire batch—would combine Level 1 and Level 2 savings simultaneously. For a single theorem both Level 2 and Level 1+2 pay T_{import} exactly once; the persistent-server benefit is purely a *batch* effect, saving $(N - 1) \cdot T_{\text{import}}$ over N theorems.

Table 3 quantifies this for the representative hard problem `mathd_numbertheory_345` ($H = 5$ holes, $C = 7$ tactics, $B = H \times C = 35$ branches), using values consistent with the measured data: $T_{\text{import}} \approx 60$ s, $T_{\text{body}} \approx 15$ s (LSP elaboration time; the `lake build` fallback is much slower because it also compiles to `.olean`), $T_{\text{tactic}} \approx 45$ ms.

The key comparison is Level 1+2 vs. Level 1 *in batch mode*. Level 1 must still pay $\lceil B/W \rceil \cdot T_{\text{body}}$ per theorem regardless of batch size; Level 1+2 reduces this to $B \cdot T_{\text{tactic}}$ per theorem by eliminating T_{body} entirely via snapshotting. At $B = 35$ this yields $\sim 16\times$ further speedup over Level 1 alone (≈ 270 s/theorem vs. ≈ 17 s/theorem, import amortized). The gap grows with B : for the hardest problems where $T_{\text{body}} > 700$ s, Level 1+2 outperforms Level 1 alone by over $50\times$ at portfolio scale ($B \gtrsim 100$ branches).

Native per-branch cost (6.8 s average) reflects LSP round-trip latency, file-worker snapshot retrieval, and per-branch elaboration of only the tactic step—not a full Mathlib reload.

Table 3: Wall-time comparison for `mathd_numbertheory_345` ($B = 35$ branches; $W = 2$ parallel workers assumed for Level 1). “Measured” entries are from Table 1; remaining entries are estimates from measured component costs. Level 1+2 per-theorem cost assumes import is amortized over a large batch ($N \gg 1$); for a single theorem Level 1+2 $\approx$ Level 2.

Approach	Wall time	vs. Level 0
Level 0 (lake build, per branch)	2,641 s (meas.)	$1\times$
Level 1 (import cached, $W=2$ workers)	~ 330 s (est.)	$\sim 8\times$
Level 2 (this work, snapshot)	133 s (meas.)	$\sim 20\times$
Level 1+2 (persistent server + snapshot, <i>not yet implemented</i>)	~ 17 s/theorem (est.)	$>100\times$

4.4 Scaling Analysis

The ablation (Table 2) reveals the fundamental reason snapshots scale well: the Lean server pays file elaboration once per LSP session, regardless of how many branches are dispatched via `dspSnapshotBranch`. Tactic CPU (a few ms to 500 ms/branch typically; P95 = 289 ms across 833 measured branches; `aesop` occasionally reaches several seconds on hard goals) is negligible relative to the 75 s/branch fallback cost. Therefore, as portfolio size C grows:

$$T_{\text{native}}(C, H) \approx T_{\text{elab}} + H \cdot C \cdot T_{\text{tactic}} \quad (1)$$

$$T_{\text{fallback}}(C, H) \approx H \cdot C \cdot (T_{\text{load}} + T_{\text{tactic}}) \quad (2)$$

where $T_{\text{elab}} \approx 78\text{--}235$ s (once), $T_{\text{load}} \approx 75\text{--}795$ s per branch (varying with theorem-body elaboration complexity; 75 s for the simple end-to-end benchmarks in Table 4), and $T_{\text{tactic}} \approx 45$ ms (negligible). From Equations (1)–(2), the speedup is $\approx H \cdot C \cdot T_{\text{load}}/T_{\text{elab}}$, which grows with both H (holes) and C (configs).

Table 4 confirms this on measured data.

Table 4: Wall time vs. branch count ($B = H \times C$, $C = 7$ throughout). Rows marked $\bullet$ are measured; rows marked $\circ$ are projected from the fitted model ($T_{\text{fallback}} \approx 75B$ s, anchored on `mathd_numbertheory_3` and `mathd_numbertheory_345`; `mathd_algebra_478` has a lower per-branch cost of ≈ 56 s/branch due to a shorter theorem body). Native model: $T_{\text{native}} \approx 120 + 0.045B$ s. Fallback scales at ≈ 75 s/branch for number-theory benchmarks; native time is dominated by the fixed elaboration cost with negligible per-branch increment.

Branches B	Native (s)	Fallback (s)	Speedup	
14	~ 121	$\sim 1,050$	$\sim 8.7\times$	$\circ$ projected
21	116	1,572	$13.5\times$	$\bullet$ measured
28	120	1,580	$13.2\times$	$\bullet$ measured
35	133	2,641	$19.9\times$	$\bullet$ measured
42	~ 122	$\sim 3,150$	$\sim 25.8\times$	$\circ$ projected
56	~ 123	$\sim 4,200$	$\sim 34.3\times$	$\circ$ projected

The fallback cost scales as $\mathcal{O}(B)$ with slope ≈ 75 s/branch for the end-to-end benchmarks (simple theorems); harder problems in the hand-crafted suite reach up to 795 s/branch, yielding proportionally larger speedups. The native cost is nearly constant at the elaboration baseline (≈ 120 s), with a ≈ 45 ms/branch increment from tactic execution. The crossover is at roughly $B = 2$ branches on the tested hardware—snapshots are beneficial for any portfolio of two or more tactics on a Mathlib theorem (Apple M-series, 8 GB RAM; the exact crossover is hardware-dependent). Projected speedups at $B = 42$ and $B = 56$ ($25.8\times$ and $34.3\times$) follow directly from this linear model and are consistent with the measured trend.

At paper scale, the original DSP pipeline proposes 100 draft candidates per theorem. With 4 holes and 7 tactics (2,800 branches total), fallback takes ~ 29 hours (with $W=2$ concurrent workers as in our evaluation; ~ 58 hours if fully sequential); snapshots reduce this to ~ 3.5 hours on the same hardware—the difference between infeasible and tractable on a single laptop.

5 Limitations

Acceleration only; accuracy unchanged. Snapshot-DSP is a pure *acceleration architecture*: it runs the same tactic portfolio on the same proof sketches and returns the same set of proved theorems as the fallback. It does not improve proof accuracy, generate better sketches, or expand the search strategy—it simply eliminates the elaboration overhead that makes the existing strategy slow. Whether a given `sorry` hole is closeable depends entirely on the sketch quality and tactic portfolio, both of which are unchanged.

Requires a patched binary. The three custom LSP methods (`dspSnapshotCapture` etc.) are not part of Lean’s standard server. Users must install `dsp-patched` via `elan`, which requires trusting a third-party Lean binary. Without the patch, the system automatically falls back to `lake build`, so compatibility is preserved but the speedup is lost.

Toward a Lean interface designed for AI. Lean 4 was architected around a human-in-the-loop model; the LSP channel and `lake build` subprocess exist to serve an editor user, not a proof-search orchestrator. As a result, every external branch reconstructs state the server already holds internally—a cost Lean eliminates for incremental editing but does not expose to callers. Snapshot-DSP is a targeted intervention: it exposes the elaboration snapshot chain for external reuse via a minimal server patch. The longer-term question is whether proof assistants should offer branching, parallelism, and state reuse as first-class primitives—a design direction Pantograph [Aniva et al., 2024] begins to explore.

LSP restart per theorem. The current implementation starts a fresh LSP server for each theorem, paying the Mathlib import cost (≈ 60 s) once per theorem rather than once per session. A persistent-server variant (keeping the server alive across a batch) would additionally amortize import loading, but this optimization is not yet implemented.

Hardware and scale. All experiments were conducted on a single Apple M-series MacBook Pro with 8 GB RAM running macOS. Performance on other hardware (Linux, higher-RAM machines, multi-GPU clusters) has not been characterized. The 48-problem benchmark covers a small slice of miniF2F-v2; behavior on harder competition problems with deeper proof structures may differ.

6 Conclusion

We have identified per-branch elaboration overhead—import loading and theorem-body re-elaboration, together consuming $>99\%$ of wall time per branch—as the dominant cost in portfolio-based Lean 4 tactic search, and introduced proof-state snapshotting as a targeted solution. Three custom LSP methods embedded in a patched Lean binary achieve a **5.6–50 $\times$** wall-time speedup across 48 miniF2F-v2 problems (average **14 $\times$** , median **9.7 $\times$** across the 45 hand-crafted benchmarks) by forking the already-elaborated proof state once per theorem rather than once per branch. The approach is orthogonal to import-level caching (e.g., Kimina [Dos Santos et al., 2025]), which avoids server restarts between theorems; snapshots additionally eliminate theorem-body re-elaboration between branches of the same theorem. The two mechanisms compose: our current implementation restarts the LSP server per theorem and does not yet exploit inter-theorem import caching; a persistent-server variant combining both optimizations would yield further gains beyond either alone. Speedup scales monotonically with `sorry-hole` count ($7.9\times$ at 1 hole, $29.8\times$ at 5 holes on average), confirming the $O(1)$ vs. $O(H \cdot C)$ asymptotic advantage of the snapshot architecture.

The mechanism is practical—it requires only a patched binary distributed via `elan`, no changes to user-facing Lean code—and general: any system running parallel tactic portfolios on Lean 4 with Mathlib can adopt it. Proof-state snapshotting is not merely a performance trick: it is an existence proof that the boundary between Lean’s internals and external AI systems can be redrawn. By exposing snapshot-and-fork as a first-class server operation, we show that elaboration-level state reuse is achievable today, with a minimal patch, on production Lean toolchains. We hope this contribution removes a key scalability barrier for LLM-guided formal theorem proving and motivates native upstream support in future Lean releases.

References

- Leni Aniva, Chuyue Sun, Brando Miranda, Clark Barrett, and Sanmi Koyejo. Pantograph: A machine-to-machine interaction interface for advanced theorem proving, high level reasoning, and data extraction in lean 4. *arXiv preprint arXiv:2410.16429*, 2024. URL <https://arxiv.org/abs/2410.16429>.
- Chenrui Cao, Liangcheng Song, Zenan Li, Xinyi Le, Xian Zhang, Hui Xue, and Fan Yang. Reviving DSP for advanced theorem proving in the era of reasoning models. *arXiv preprint arXiv:2506.11487*, 2025. URL <https://arxiv.org/abs/2506.11487>.
- DeepSeek-AI. DeepSeek-Prover-V2: Advancing formal mathematical reasoning via reinforcement learning for subgoal decomposition. *arXiv preprint arXiv:2504.21801*, 2025. URL <https://arxiv.org/abs/2504.21801>.
- Marco Dos Santos, Hugues de Saxcé, Haiming Wang, Ran Wang, Mantas Baksys, Mert Unsal, Junqi Liu, Zhengying Liu, and Jia Li. Kimina lean server: A high-performance lean server for large-scale verification. *arXiv preprint arXiv:2504.21230*, 2025. URL <https://arxiv.org/abs/2504.21230>.
- Albert Q. Jiang, Sean Welleck, Jin Peng Zhou, Wenda Li, Jiacheng Liu, Mateja Jamnik, Timothée Lacroix, Yuhuai Wu, and Guillaume Lample. Draft, sketch, and prove: Guiding formal theorem provers with informal proofs. In *International Conference on Learning Representations (ICLR)*, 2023. URL <https://arxiv.org/abs/2210.12283>.
- Matěj Kripner, Michal Šustr, and Milan Straka. LeanTree: Accelerating white-box proof search with factorized states in lean 4. *arXiv preprint arXiv:2507.14722*, 2025. URL <https://arxiv.org/abs/2507.14722>.
- Adarsh Kumarappan, Mo Tiwari, Peiyang Song, Robert Joseph George, Chaowei Xiao, and Anima Anandkumar. LeanAgent: Lifelong learning for formal theorem proving. In *International Conference on Learning Representations (ICLR)*, 2025. URL <https://arxiv.org/abs/2410.06209>.
- Jannis Limperg and Asta Halkjær From. Aesop: White-box best-first proof search for Lean. In *Proceedings of the 12th ACM SIGPLAN International Conference on Certified Programs and Proofs (CPP)*, 2023. URL <https://dl.acm.org/doi/10.1145/3573105.3575671>.
- Azim Ospanov, Farzan Farnia, and Roozbeh Yousefzadeh. miniF2F-Lean revisited: Reviewing limitations and charting a path forward. *arXiv preprint arXiv:2511.03108*, 2025. URL <https://arxiv.org/abs/2511.03108>.
- Auguste Poiroux, Viktor Kuncak, and Antoine Bosselut. LeanInteract: A python interface for Lean 4, 2025. URL <https://github.com/augustepoiroux/LeanInteract>.
- Peiyang Song, Kaiyu Yang, and Anima Anandkumar. Lean copilot: Large language models as copilots for theorem proving in lean. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2025. URL <https://arxiv.org/abs/2404.12534>.
- The Harmonic Team. Aristotle: IMO-level automated theorem proving. *arXiv preprint arXiv:2510.01346*, 2025. URL <https://arxiv.org/abs/2510.01346>.
- Haiming Wang, Huajian Xin, Chuanyang Zheng, Lin Li, Zhengying Liu, Qingxing Cao, Yinya Huang, Jing Xiong, Han Shi, Enze Xie, Jian Yin, Zhenguo Li, Heng Liao, and Xiaodan Liang. LEGO-prover: Neural theorem proving with growing libraries. In *International Conference on Learning Representations (ICLR)*, 2024. URL <https://arxiv.org/abs/2310.00656>.
- Kaiyu Yang, Aidan M. Swope, Alex Gu, Rahul Chalamala, Peiyang Song, Shixing Yu, Saad Godil, Ryan Prenger, and Anima Anandkumar. LeanDojo: Theorem proving with retrieval-augmented language models. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2023. URL <https://arxiv.org/abs/2306.15626>.