RACE: Scalable Statistical Estimation of Functional Consistency in LLM Neurons


Runyu Wang[1], Bo Liu[2], Xiaxin Zhang[1], Yu Han[1], Jiawei Cao[1], Xiaoye Zhang[3], Zhe Zhang[4], Yifan Yang[4], Peng Ping[1,*]

[1]Nantong University [2]Chongqing University of Post and Telecommunications
[3]China Southern Power Grid Company Limited [4]Meituan

Stable residual alignment reveals neurons for specific model behaviors.

01 Collect Signed Evidence

Strong activations alone can hide inconsistent behavior. RDA collects signed residual evidence across all generated tokens (code/math) or teacher-forced tokens (reference/PyComp-1K).

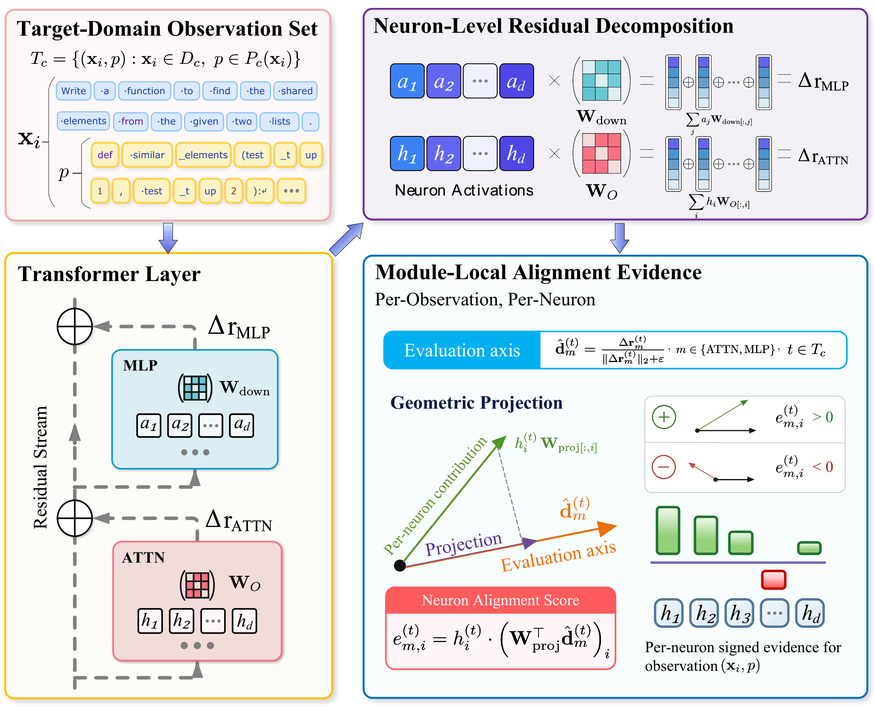

Original paper, Fig. 1: residual-direction alignment (RDA). The axis is the current module's update, and each neuron supplies signed alignment evidence.

02 Estimate, Rank, and Filter

Functional consistency: positive mean evidence with low variability.

Forward-Pass Evidence

For neuron j at token-position observation t:

$$e_j^{(t)} = a_j^{(t)} \mathbf{w}_j^\top \hat{\mathbf{d}}^{(t)}, \qquad \hat{\mathbf{d}}^{(t)} = \frac{\Delta \mathbf{r}^{(t)}}{\|\Delta \mathbf{r}^{(t)}\|_2 + \varepsilon}.$$

Here $\mathbf{w}_j$ is the output-projection column; a_j is the MLP activation or attention output channel.

Bayesian Aggregation

Model $e_j^{(t)} \sim \mathcal{N}(\mu_j, \sigma_j^2)$ with a Normal-Inverse-Gamma prior. Update from the observation count, mean, and centered sum of squares.

$$\mu_j \mid \{e_j^{(t)}\} \sim t_{2\alpha_n}(\mu_{n,j}, \sigma_{\mu,j}), \qquad \sigma_{\mu,j}^2 = \frac{\beta_{n,j}}{\alpha_n \lambda_n}.$$

Conservative Alignment Magnitude (CAM):

$$\mathrm{CAM}_j = \mathbf{1}[\mu_{n,j} > 0] \max\{0, \mu_{n,j} - t_{.95,2\alpha_n} \sigma_{\mu,j}\}.$$


The lower credible bound penalizes noisy or scarce evidence. Default prior: $(\mu_0, \lambda_0, \alpha_0, \beta_0) = (0, 1, 1, 1)$; $\gamma = .05$.

Reference-Set Filtering (RSF)


Remove neurons that rank highly on a general reference set (WikiText-2), then retain the top target neurons **within each layer and module**. Suppress their activations to test behavioral relevance.

03 Selective Suppression: Broad to Narrow

Code-selected MLP neurons: strong target and OOD drops, with much smaller effects on other benchmarks.

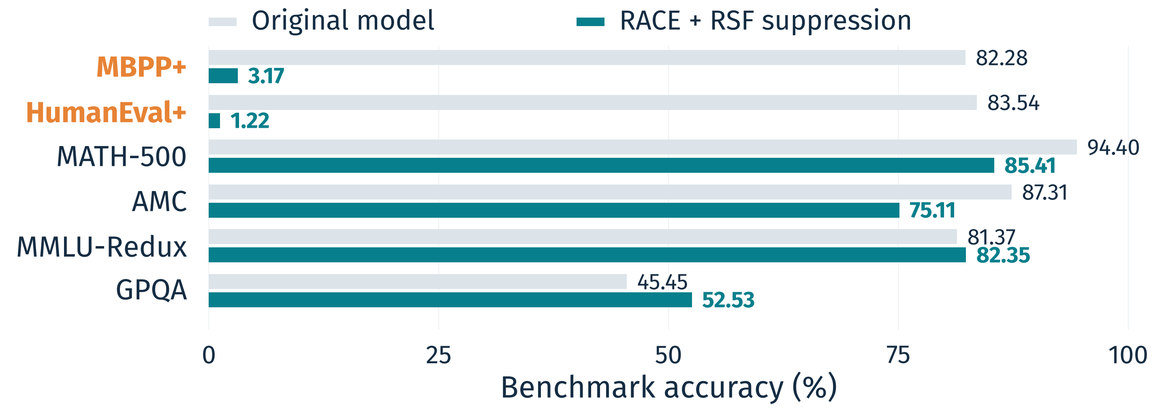


Qwen3-4B-it; MBPP+ scoring, WikiText-2 RSF, top-1% MLP suppression per layer. Accuracy averages three runs (Table 21); code targets are orange.

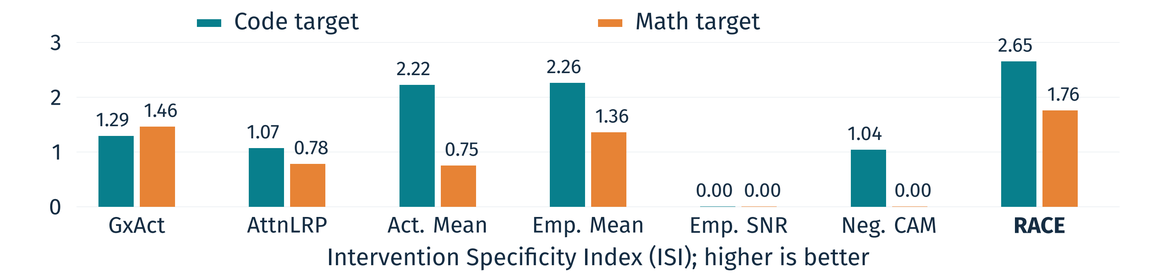

Same top-1% MLP budget with RSF. ISI measures target drop relative to non-target drop; higher is better (Fig. 3; Tables 21, 23).

From Broad Capability to a Narrow Behavior

PyComp-1K: 1,000 AST-verified Python statements targeting comprehensions. Suppress $K_{\mathrm{sel}} = 10$ neurons per layer after RSF.

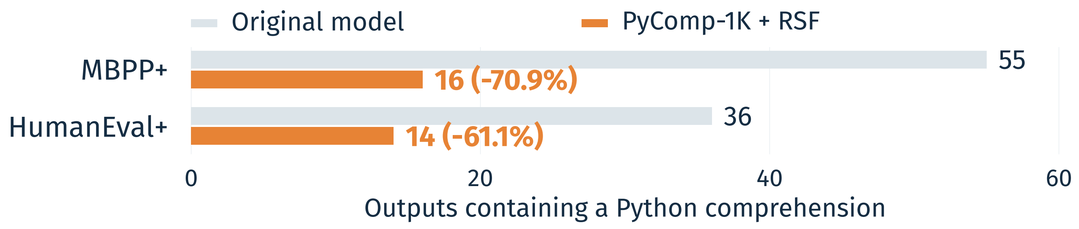


Qwen3-4B-it; number of outputs containing at least one comprehension (Table 5).

Functional correctness on the **remaining comprehension-using solutions**: MBPP+ 92.73% → 87.50%; HumanEval+ 86.11% → 85.71% (conditional subset scores).

04 Verify the Distributional Effect

Target-corpus perplexity rises sharply; the general reference corpus changes by less than 3%.

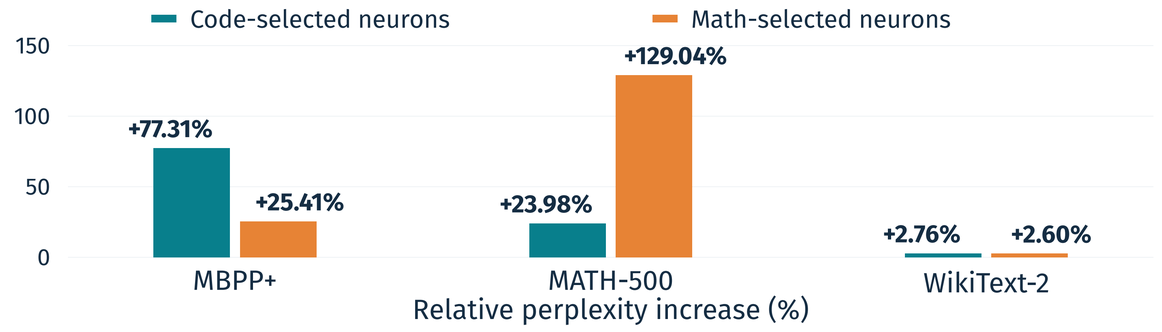

Qwen3-4B-it, RSF, top-1% MLP suppression per layer. Relative perplexity increase from Table 4; each color uses its own target scoring set.

The Effect Extends to 32B Models

OLMo-3.1-32B-it, math scoring + WikiText-2 RSF; top-5% MLP suppression per layer (Table 3).

Benchmark	Original	Suppressed
MATH-500 (target)	86.40	**6.72**
AMC (OOD)	79.85	**7.46**
GPQA	48.60	37.79
MMLU-Redux	84.70	77.79

Scope: domain-specific effects are stronger in MLPs. Attention channels show greater cross-domain overlap, and RSF yields weaker attention specificity. Linear projections can miss nonlinear interactions.

Paper, Code, and Contact

Paper: arXiv:2608.24758v2
Code: github.com/Nexround/RACE
Contact: 2430310032@stmail.ntu.edu.cn
*Corresponding author: pingpeng@ntu.edu.cn