


How Is AI Opening Air Quality Data to Citizens?

5th Next-Gen Mentoring Workshop · Tuesday 22 September 2026 · 11:00 CEST · online

Miguel Escribano

inBiot Monitoring SL · stakeholder of NextAIRE

mescribano@inbiot.es · www.inBiot.es

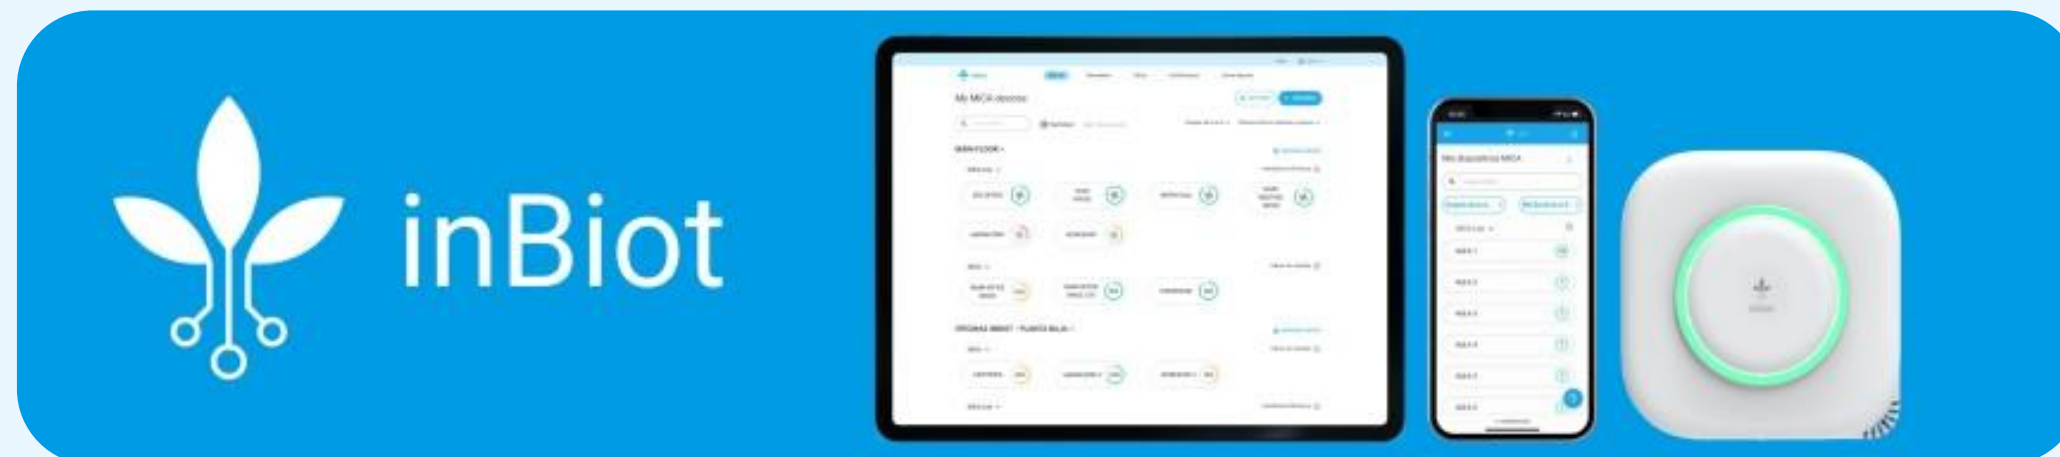

CONTENTS

Six sections

- 01** Who we are
- 02** The challenges of AQ & AI
- 03** How AI opens the data
- 04** What inBiot is building
- 05** Scenarios & Use cases
- 06** **Exercises: BYOA (Build Your Own Agent)**

The pack

exercises/ Unzip this folder. It is the project.
Every exercise folder has README.md, AGENTS.md and CLAUDE.md.

- 1

ex1_workspace
The host folder. Open the zip in one IDE.
- 2

ex2_openrouter
settings.local.json.example install-openrouter-models.sh
- 3

ex3_next_air_assistant
next-air-assistant/ the plugin. Also used by 4 and 5.
- 4

ex4_n8n_alerts
daily-open-meteo-alert.json
- 5

ex5_chainlit
app.py llm.py tools.py brain.py Start Next-Air-Assistant.bat
- 6

ex6_openair
README only. The MCP server is the openair kit.
- 7

ex7_always_on_host
README only. Hermes Desktop, first look.

next-air-assistant/
Markdown and JSON. No application code.

agents/
next-air-assistant.md. Persona, OODA, the pause.

skills/
assess forecast-co2 open-close-filter-stay help

knowledge/
thresholds.md preconditions.md

commands/
/assess /forecast-co2 /help /open-close-filter-stay

mcp.json
Open-Meteo outdoor air and weather. Tavily search.

adapters
plugin.json Claude Codex Cursor VS Code

examples
classroom_co2_24h.csv synthetic, 10-minute steps

 SECTION 01

Who we are

Celebrating Airlab award: we give away a MICA Plus IAQ monitor, for one study



- A MICA Plus monitor.
- Twelve months of the MyinBiot software.
- The inBiot data MCP, so your assistant can read the sensor.

inBiot will choose the study that fits better.

👉 WRITE TO

mescribano@inbiot.es

- Who you are.
- Which setting: a home, a school, an office, a ward, a hall.
- What you want to learn.
- If you can share the data.
- If you aim to publish.

A
3 in 1
solution

Hardware


SaaS

Technical support
service

7 YEARS
100% in-House

13
measured
parameters

5
indicators



+6000
devices deployed

+30
countries

Trusted partners in over
10 countries

Clients/Partners



Alliances



 SECTION 02

The challenges

Challenge 01: Making IAQ data available for all

HEALTH IMPACT / RESEARCH / LEGAL

What affects health and
the exposome?



CERTIFICATIONS / ESG / WELLNESS

What does the standard
require?



SMART FACILITY MANAGEMENT

What the building should
do next



CITIZEN SCIENTISTS

What should I do in this
room this afternoon?

The air in here
The air outside
What to do next



EPBD recast 2026

And now continuous measurement is mandatory.

02 THE CHALLENGES

Challenge 02: understanding complex indoor-air dynamics.

A snapshot is not a week

- Occupant behaviour
- Dynamic ventilation operation
- Spatial variability within the same building
- Fast, episodic events



A week of CO₂, PM_{2.5} and T in a real space: three distinct dynamics that no spot measurement captures.

The laboratory measures precisely at that instant. **The continuous sensor** captures what happens the rest of the time.

02 THE CHALLENGES

Challenge 03: Securing the Data Quality Objective (DQO)

Domestic indicative	IAQ indicative	IAQ instrumentation	Ambient-air indicative	Reference station
USE Personal information · no traceability	USE Healthy-building management & certification	USE One-off technical studies & research	USE Support for official networks, hotspots	USE Regulatory compliance · emissions
REGULATION / STANDARDS —	REGULATION / STANDARDS UNE 171330 · EPBD · PSCAI	REGULATION / STANDARDS EN 50543 · ISO/IEC 17025 · reference analytical methods · PSCAI	REGULATION / STANDARDS CEN/TS 17660 · PAS 4020 · Directive 2008/50/EC (indicative)	REGULATION / STANDARDS ISO/IEC 17025-accredited · Directive 2008/50/EC (reference)
	 CO2, PM2.5, PMs, tVOCs, Formaldehyde, O3, NO2, Noise...			

Challenge 04: Europe and the AI Act



01 What applies today

- The assistant states that it is an AI system in its first message, as Article 50 has required since August 2026.
- We must mark the text it generates as AI output by December 2026.
- The high-risk obligations moved to December 2027, but they were not removed.

02 Why it is not high-risk

- We declare one purpose: the assistant assesses indoor air and advises on ventilation.
- The assistant reads occupancy by room, so it never identifies who sits at a desk.
- Human-in-the-loop: A person confirms every instruction the assistant sends to the building system.


03 Personal data and transfers

- A room reading becomes personal data as soon as the room identifies a person.
- The customer runs an impact assessment and consults the works council before go-live.
- What leaves should read "Room 2.3, 1,100 ppm", not "John's office" or a desk identifier.

Reg. (EU) 2024/1689 as amended by (EU) 2026/1744 · GDPR · Data Act. Working brief, not legal advice.

03 HOW AI OPENS THE DATA

Challenge 05: Keep up with innovation. An example: JEV

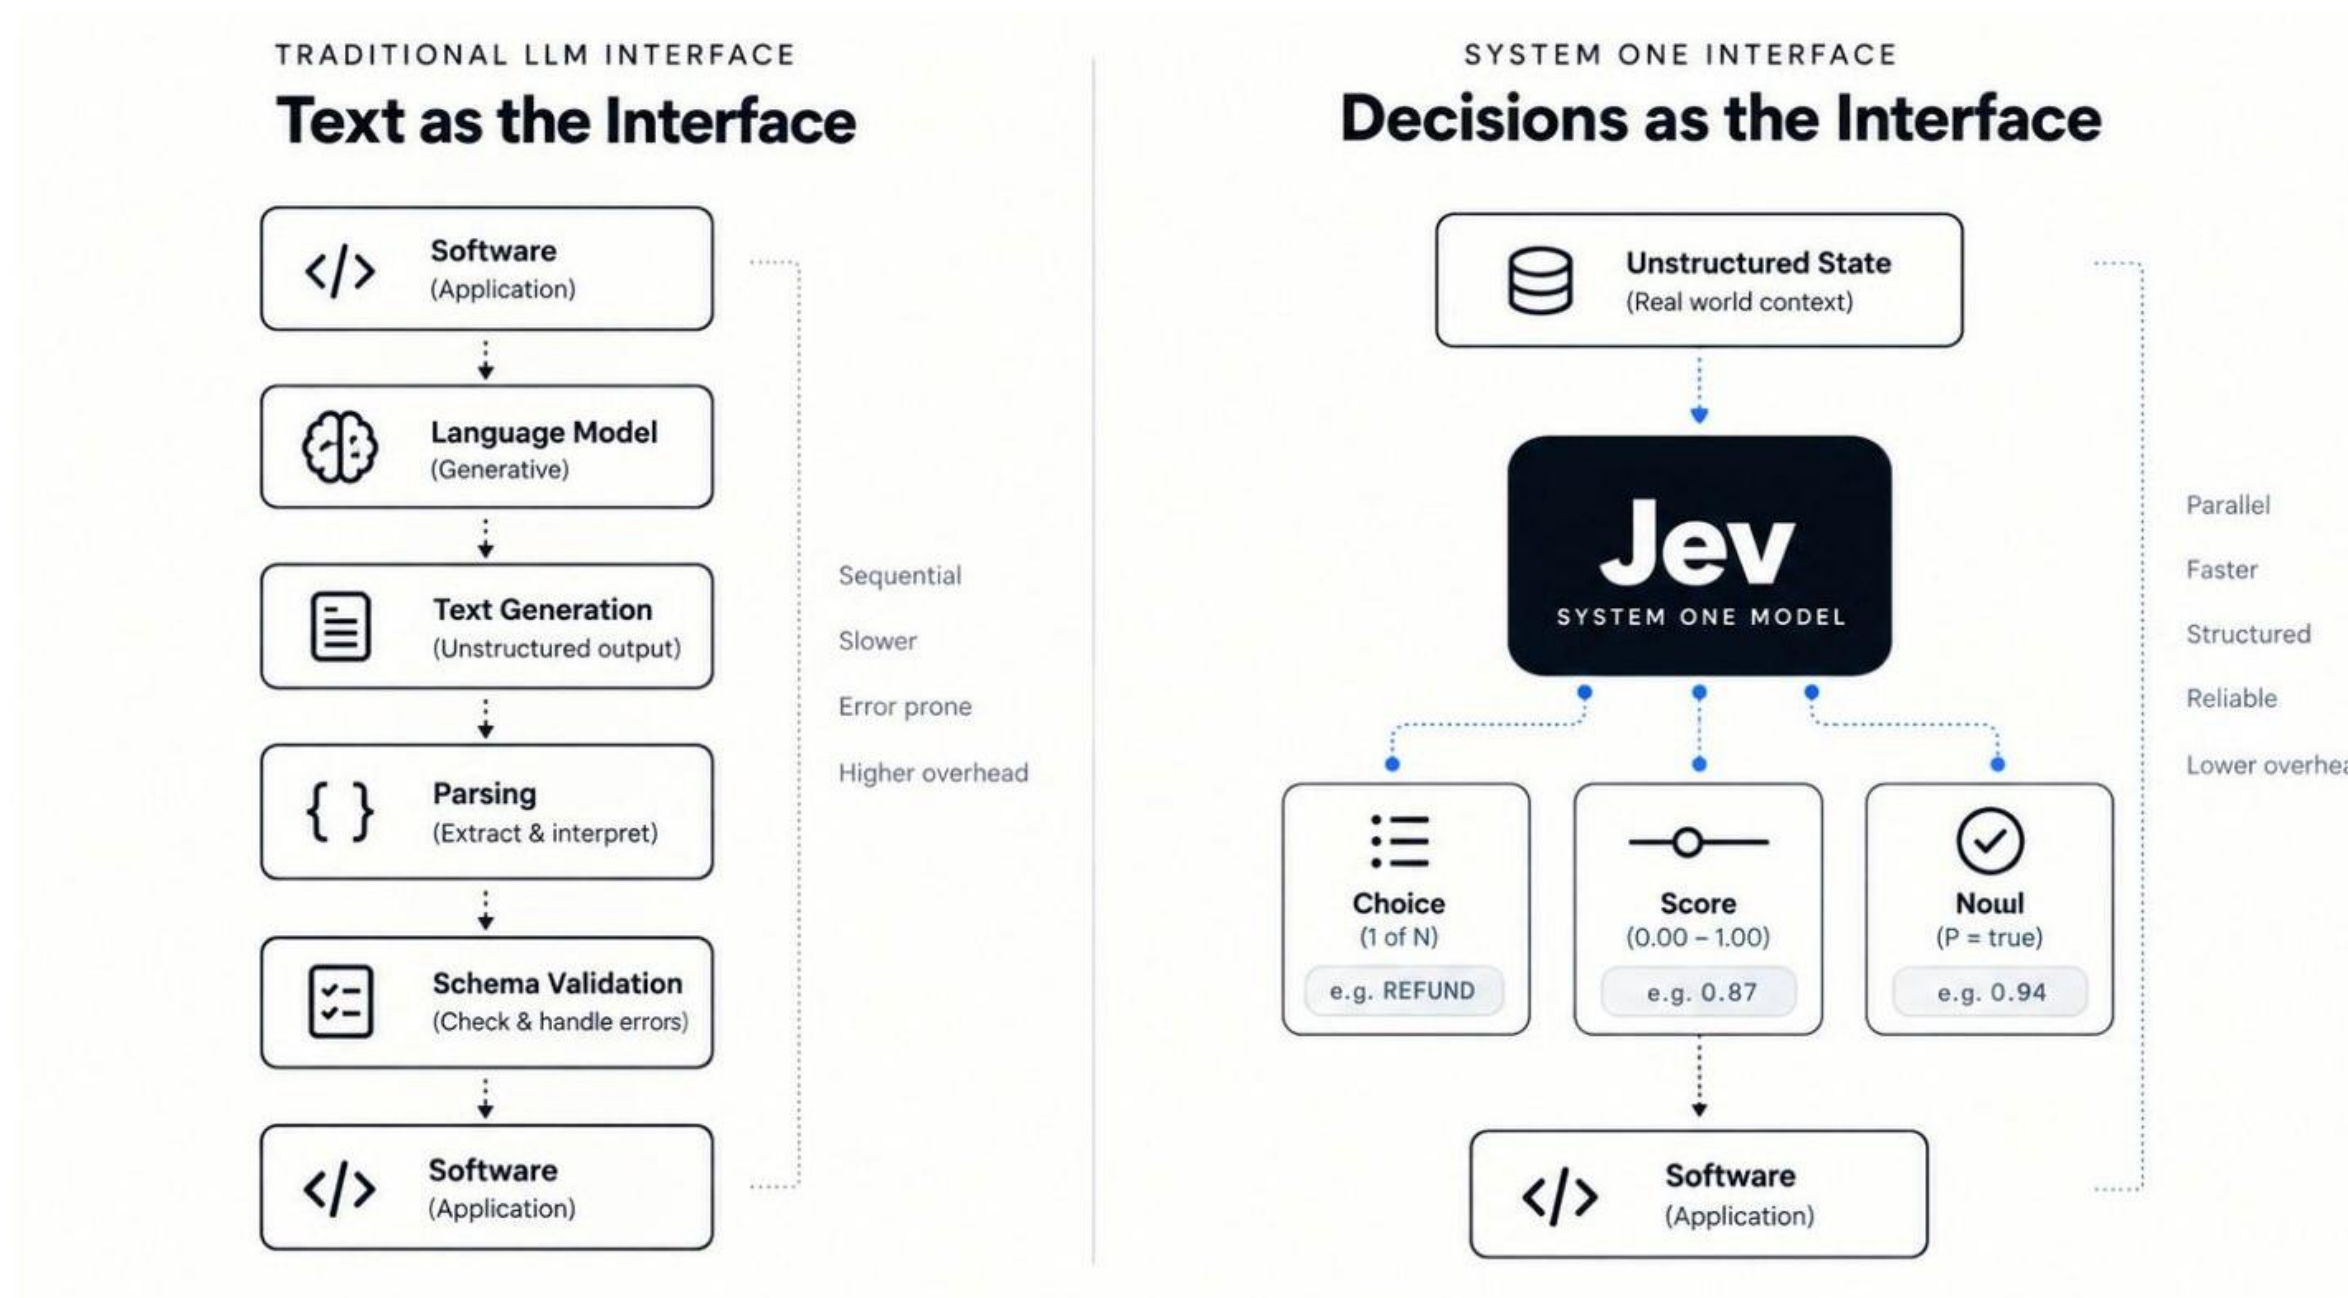

200x speed
1/400 cost

SECTION 03


How Is AI Opening Air Quality Data to Citizens?

Machine learning already does sensing, calibration, dispersion, monitoring, and forecast.


03 HOW AI OPENS THE DATA

The Ai autonomy ladder: from model to agent

A standard chatbot mostly answers. An agent does something more structured: it receives a goal, reasons about the next step, calls tools when needed, observes what comes back, and then decides whether to continue, stop, or change strategy. This loop is what makes the system agentic.

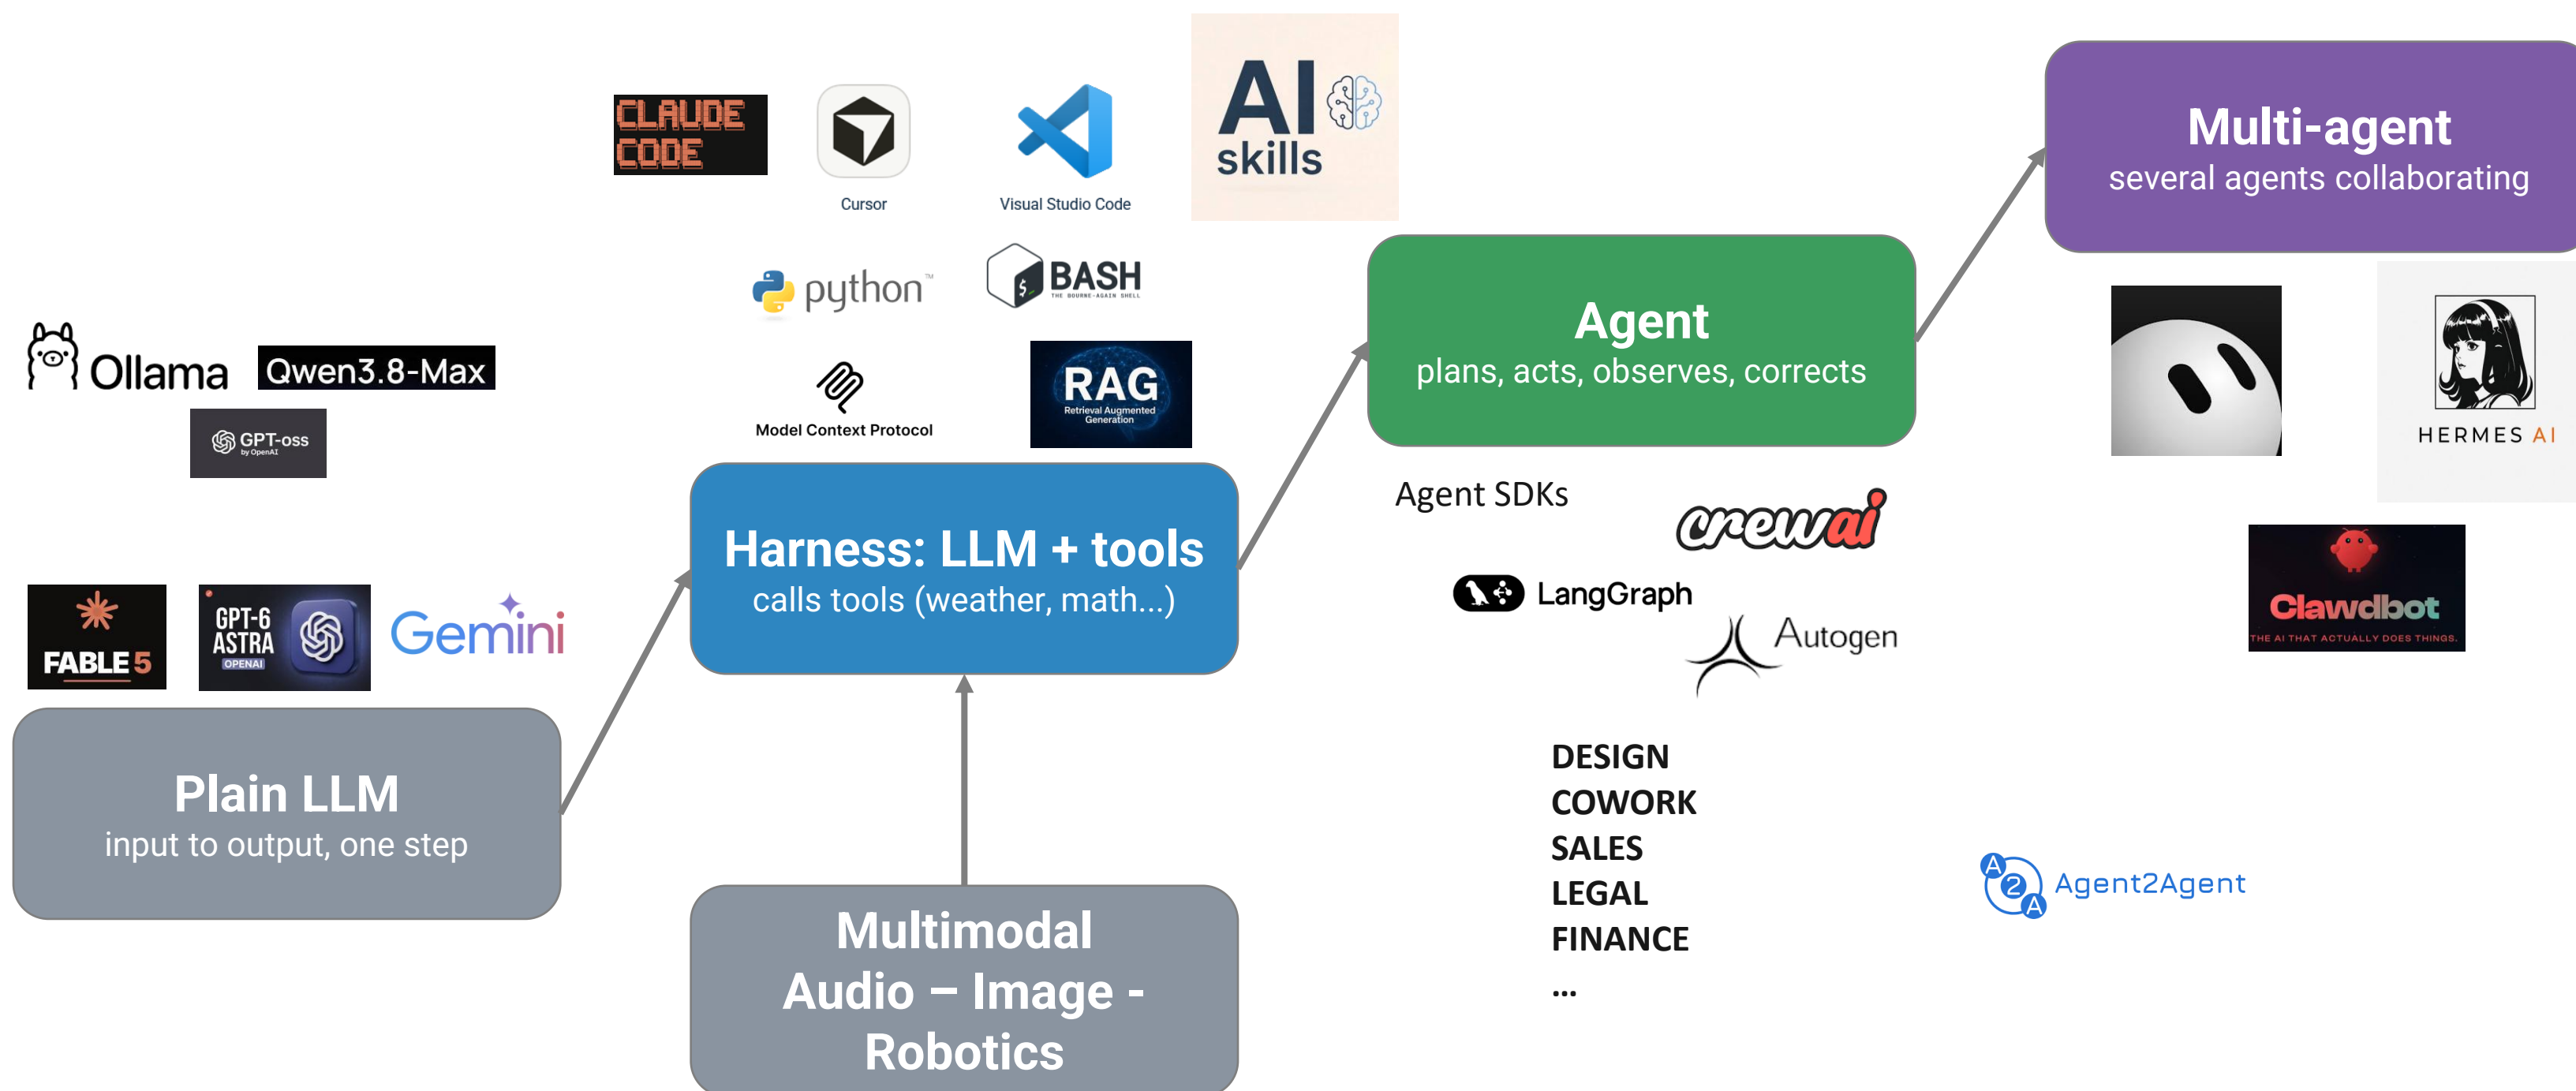

Basic framework for Agentic solutions: perceive, reason, act, repeat

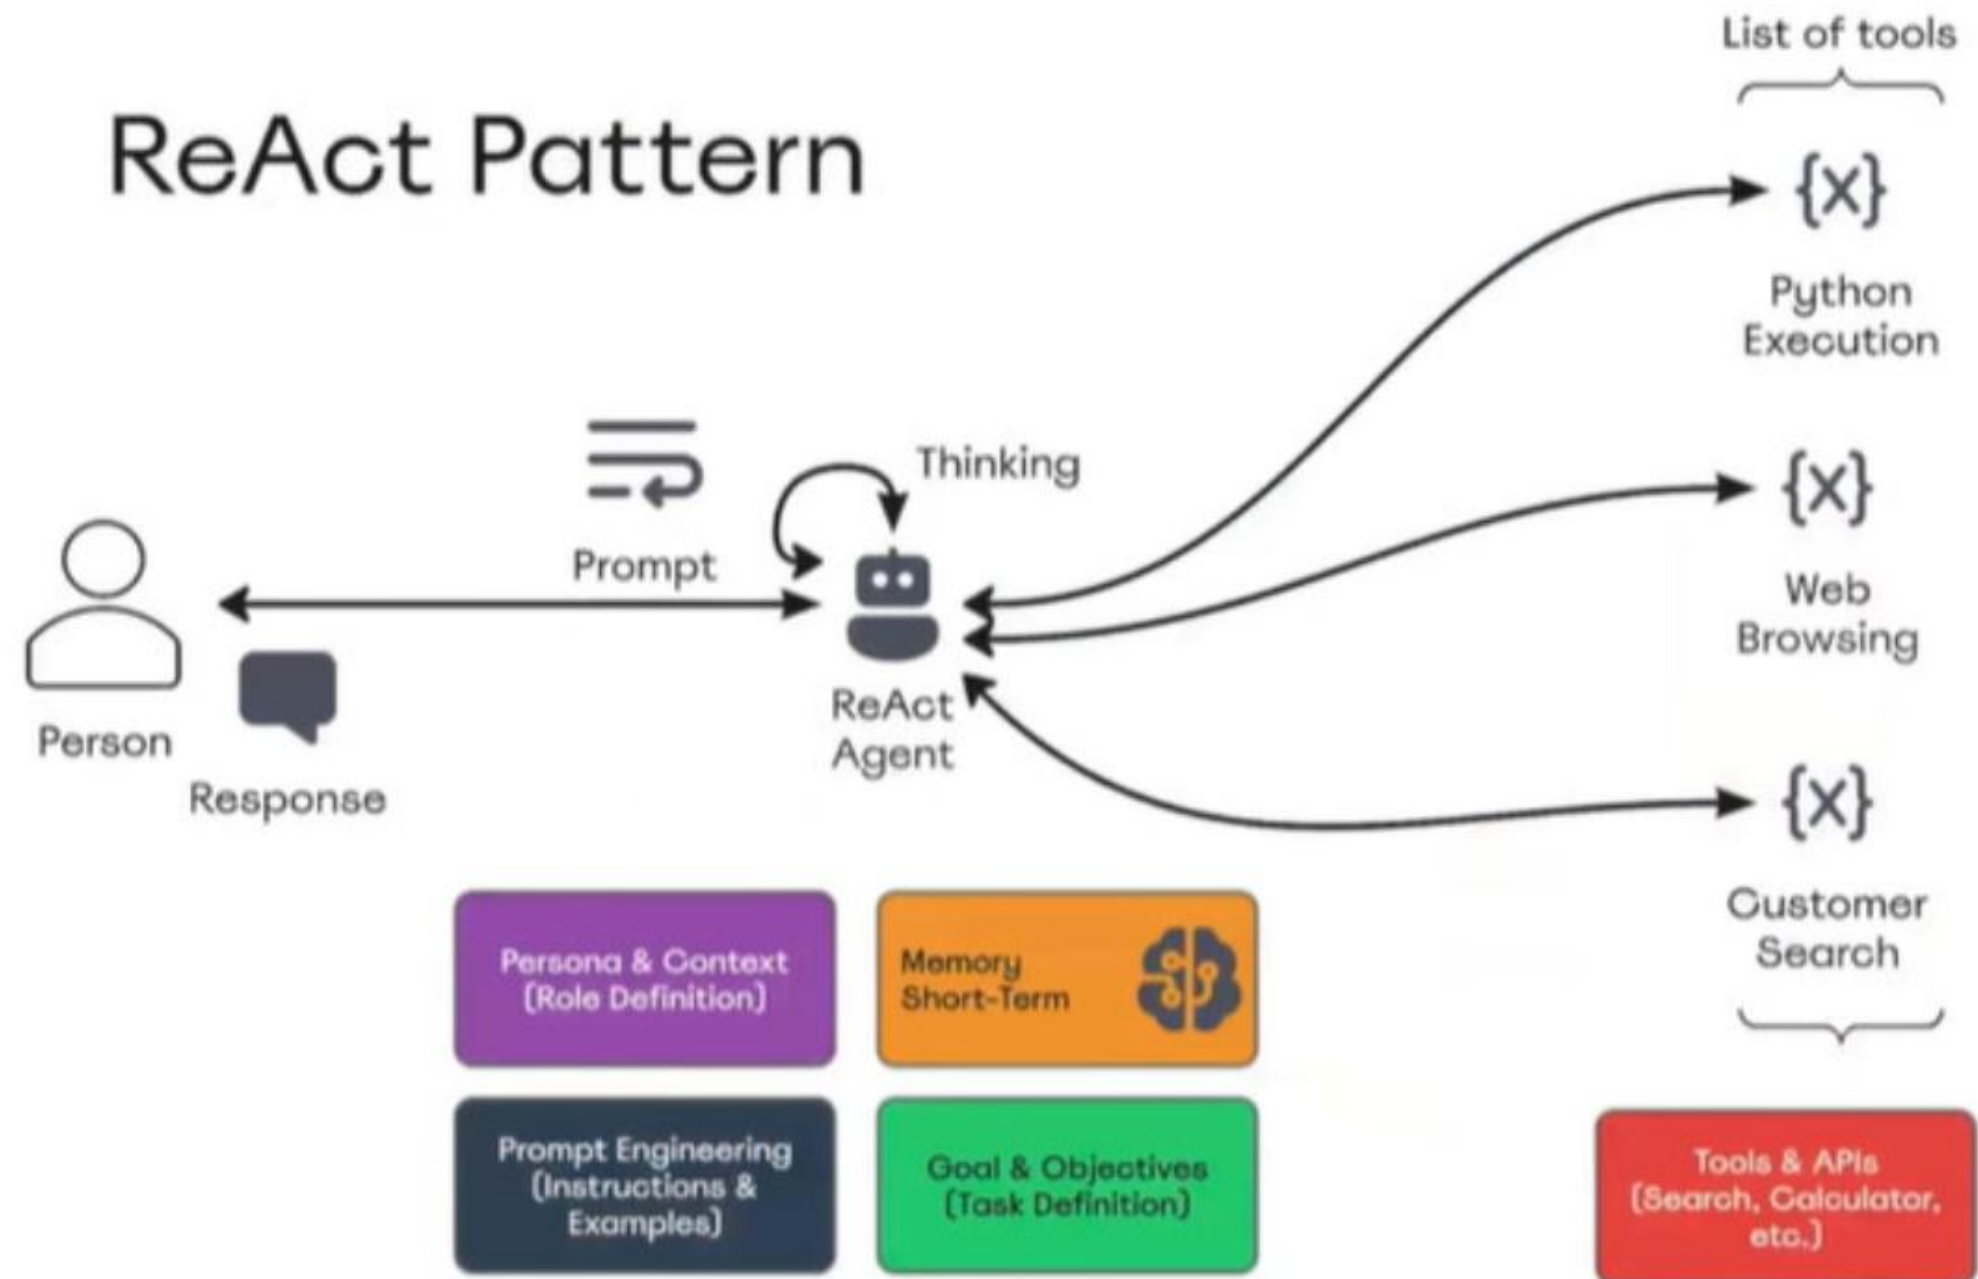

Air Quality AI initiatives (open source / non-commercial)

2017

2024

2025

2026

Bots translate the index

AskSmokey turned open readings into emoji reports on Twitter; Shoot! I Smoke turned PM2.5 into cigarettes a day.

Amrit Sharma; Coelho and Martiny

The model writes the code

VayuBuddy takes a question in plain language, writes and runs Python over India's public sensor data, and answers in plain language, with a plot when one helps.

IIT Gandhinagar; seven models on 45 questions

Knowledge and benchmarks

VayuChat adds demographics and funding records and ships a benchmark; **AirGPT** and Emission-GPT read curated literature instead of remembering it.

IIT Gandhinagar; npj Climate and Atmospheric Science; HKUST

Tools, MCP, edge, and roles

Numbers arrive only through tools over MCP (AMI); a Raspberry Pi with Open-Meteo and a local model keeps everything at home (HIAPLLM); agents with roles share the work (PLAM; Neuro-Air).

 *The shape of exercises 3 to 5*

INDOOR IS STILL A HANDFUL

A few dozen outdoor assistants, a handful indoor.

#AskSmokey scienceandperspective.com/2017/10/29/clean-air-supposed-to-be-free · Shoot! I Smoke shootismoke.app · VayuBuddy arxiv.org/abs/2411.12760
VayuChat arxiv.org/abs/2511.01046 · AirGPT doi.org/10.1038/s41612-025-01070-4 · Emission-GPT arxiv.org/abs/2510.02359
AMI arxiv.org/abs/2511.03706 · HIAPLLM github.com/ParthaPRay/Air_Pollution_LLM_Advisor · PLAM doi.org/10.3390/fi18020078
AIRWISE arxiv.org/abs/2606.22496 · Occupant-centric control doi.org/10.1016/j.enbenv.2026.04.001 · Crew Air Analyzer github.com/rooneyrulz/crew-air-analyzer
Neuro-Air doi.org/10.1038/s44407-026-00102-4

One example: Crew Air Analyzer

crew-air-analyzerPublic

Unwatch1Fork0Starred2

main2 Branches0 Tags

Go to file

Add fileCode

rooneyrulzUpdate README.MD3491cba · last year2 Commits

backend	initial commit	last year
.gitignore	initial commit	last year
LICENSE	initial commit	last year
README.MD	Update README.MD	last year

READMEMIT license

About

crew-air-analyzer — An intelligent multi-agent system for analyzing and reporting indoor air quality using AI, built with FastAPI and CrewAI on the backend and a sleek Next.js + Tailwind frontend.


crewai, fastapi, groq, langchain, llama3, nextjs, openai, pandas, pydantic, shadcn-ui, tailwindcss, typescript

Readme, MIT license, Activity, 2 stars, 1 watching, 0 forks

Report repository



Multi-Agent System

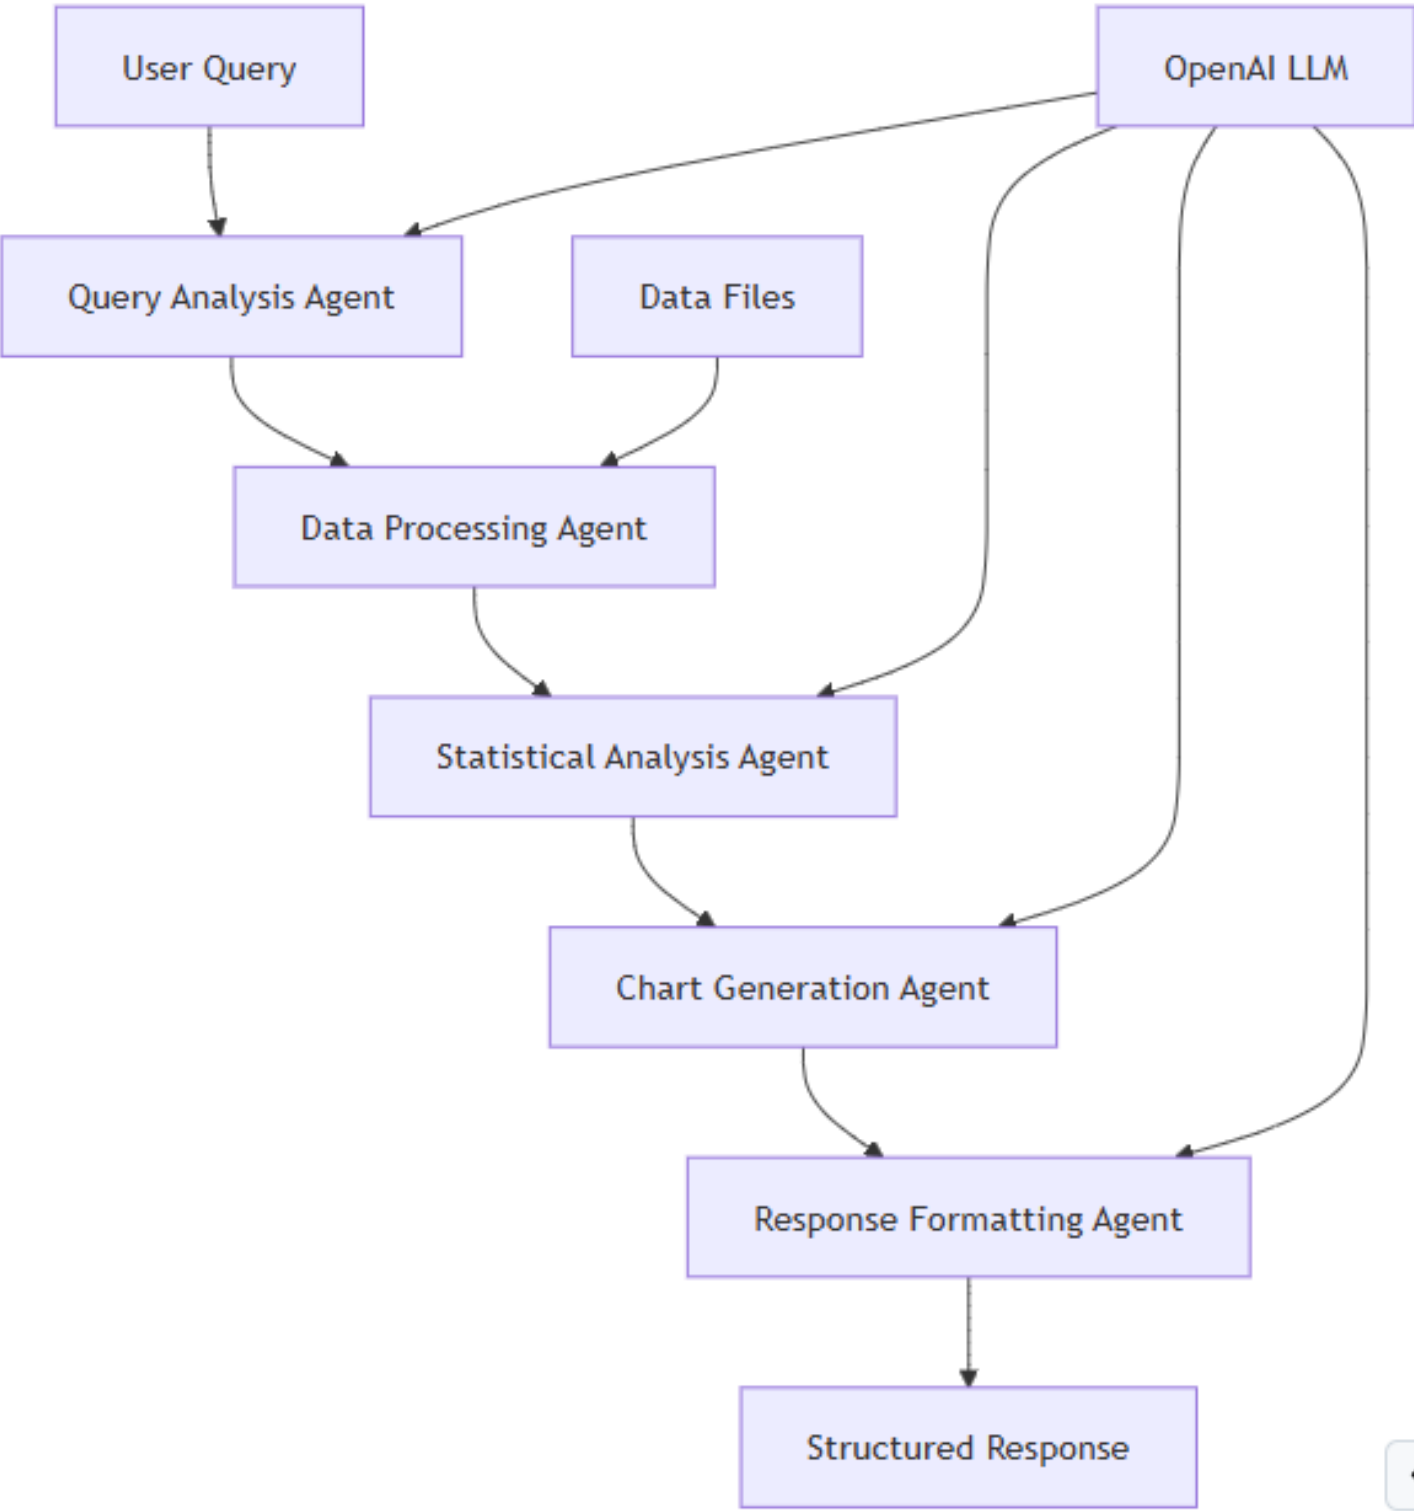

IAQ catalogues to feed your agent with

CATALOGUE	WHAT IT HOLDS	WHERE
PANDORA	About 10k emission rates from 747 sources. They feed models, not this room.	db-pandora.univ-lr.fr
annex (IEA EBC 86)	More than 10k homes, measured.	iea-ebc-annex86.github.io
Global IAQ database	Field measurements from Licina / HOBEL at EPFL, still being built.	iaqdb-dev.epfl.ch
IEQ Guidelines	National and international limits in one table. IAQ from 40 countries.	ieqguidelines.org
OQEI / OQAI	French campaigns: 571 homes, 300+ schools, plus health-care buildings.	oqei.fr
IPChem Indoor Air	JRC hub for SINPHONIE, OFFICAIR and AIRMEX chemical occurrence.	ipchem.jrc.ec.europa.eu
WHO HAP	196 household studies, 43 countries. Kitchen and personal PM and CO.	who.int/hap-measurement-db
EDIAQI	Croatia room: sensors plus cooking, cleaning, doors, presence.	zenodo.org/14763137
K-HEALTHinAIR	Homes, schools, hospital, market. Indoor and outdoor. AT and ES pilots.	k-healthinair.eu
SynAir-G	Calibrated school sensor boxes, several countries, 2025 to 2026.	zenodo.org/18196048
Aalborg apartments	Five homes, 7 days, occupancy ground truth next to CO2, T, RH.	doi.org/10.54337
Aalborg offices	Six rooms, 2023, camera occupancy plus HVAC.	zenodo.org/10673763
ASHRAE occupant behavior	34 datasets, 15 countries. Windows, AC, presence. Not chemistry.	ashraeobdatabase.com
MIT-JCI IAQ-HVAC	Campus rooms: CO2, occupancy, supply flow, TVOC, PM.	github.com/MIT-JCI-IAQ-HVAC
Open-Meteo Air Quality	Hourly CAMS forecast, Europe about 11 km. Already in the pack.	open-meteo.com
CAMS	Source of that forecast. Also on slide 15.	atmosphere.copernicus.eu
OpenAQ	Ground measurements, not AQI. Lineage of AskSmokey.	docs.openaq.org
EEA download service	Official Europe, E1a and up-to-date E2a, Parquet.	eea.europa.eu
WHO Ambient V8	Annual city means, 8,023 settlements. Context, not a window.	who.int/air-quality-database
EDGAR v8.1	Outdoor emission grids, 1970 to 2022. The outdoor cousin of PANDORA.	edgar.jrc.ec.europa.eu
SPECIATE v5.4	6,897 source profiles for models.	epa.gov/speciate

03 HOW AI OPENS THE DATA

Principles that turn raw data into reliable decisions

1. LLMs write code over our data

The model writes and runs code over the data, so the number is computed, not recalled.

VayuBuddy, VayuChat

2. Grounding models into domain knowledge

Standards, thresholds and literature it consults instead of remembering.

AirGPT, Emission-GPT

3. Numbers come only through tools, no LLMs

Readings and forecasts arrive by tool call, never from memory.

AMI; VayuChat's rule: never hand the model the table

4. Observability and localization

Local or free models, inference on your machine, your key in your pocket.

HIAPLLM on a Raspberry Pi

5. Mixture-of-Experts split the work by role

Planning agents and language agents share the work.

PLAM, Plovdiv

6. Assistants plug into the host in use

The assistant exposes or consumes tools through the Model Context Protocol inside an application people already open.


AMI

Six patterns the field has converged on since 2024. Every path combines some of them. Each project is linked on the Paths already taken slide.

 SECTION 04

What inBiot is building for the new era of IAQ situational intelligence

Governance and observability as guardrails

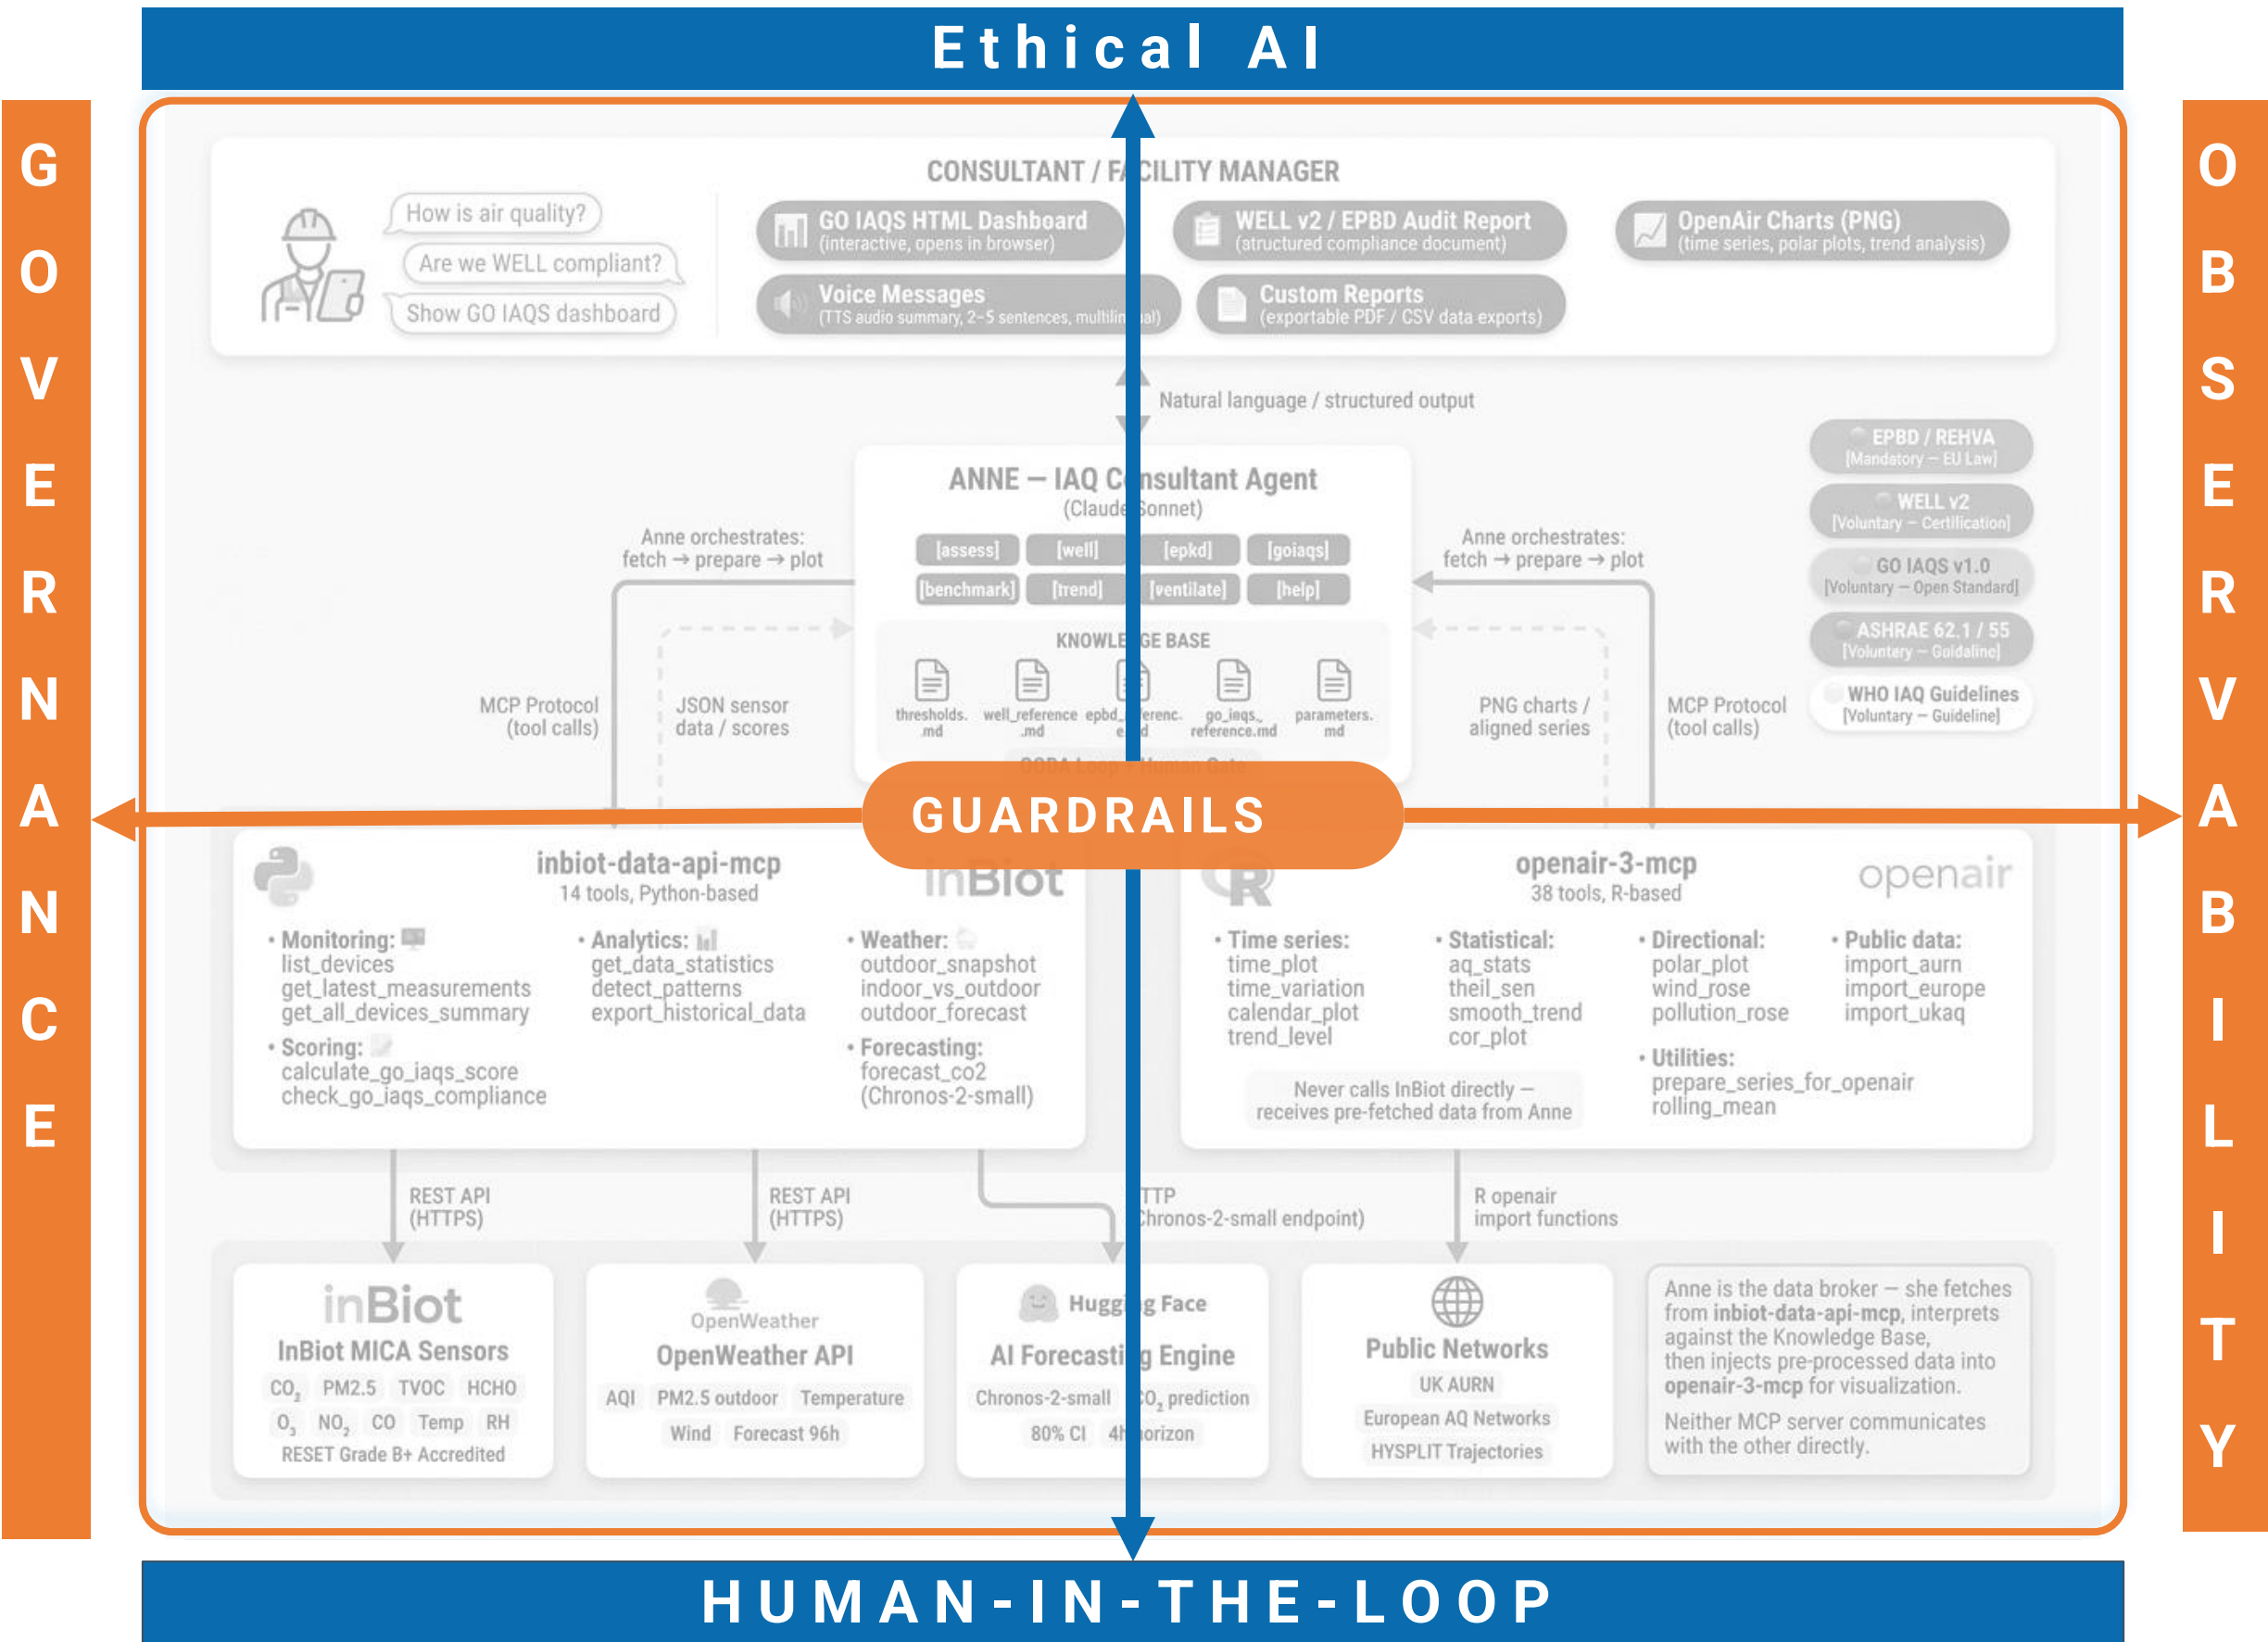

04 WHAT INBIOT IS BUILDING


The challenge of embedding AI into IAQ management with safeguards

Anne.

A deterministic IAQ assistant with judgement and capability.

- UX
- Real-time data
- Tools
- Hard & soft skills
- Domain knowledge
- RAG
- Governance
- Observability
- AIOps
- MLOps
- DevOps
- Legal, EU AI Act
- GDPR
- ...

 **Exercise 5** helps you build a basic app

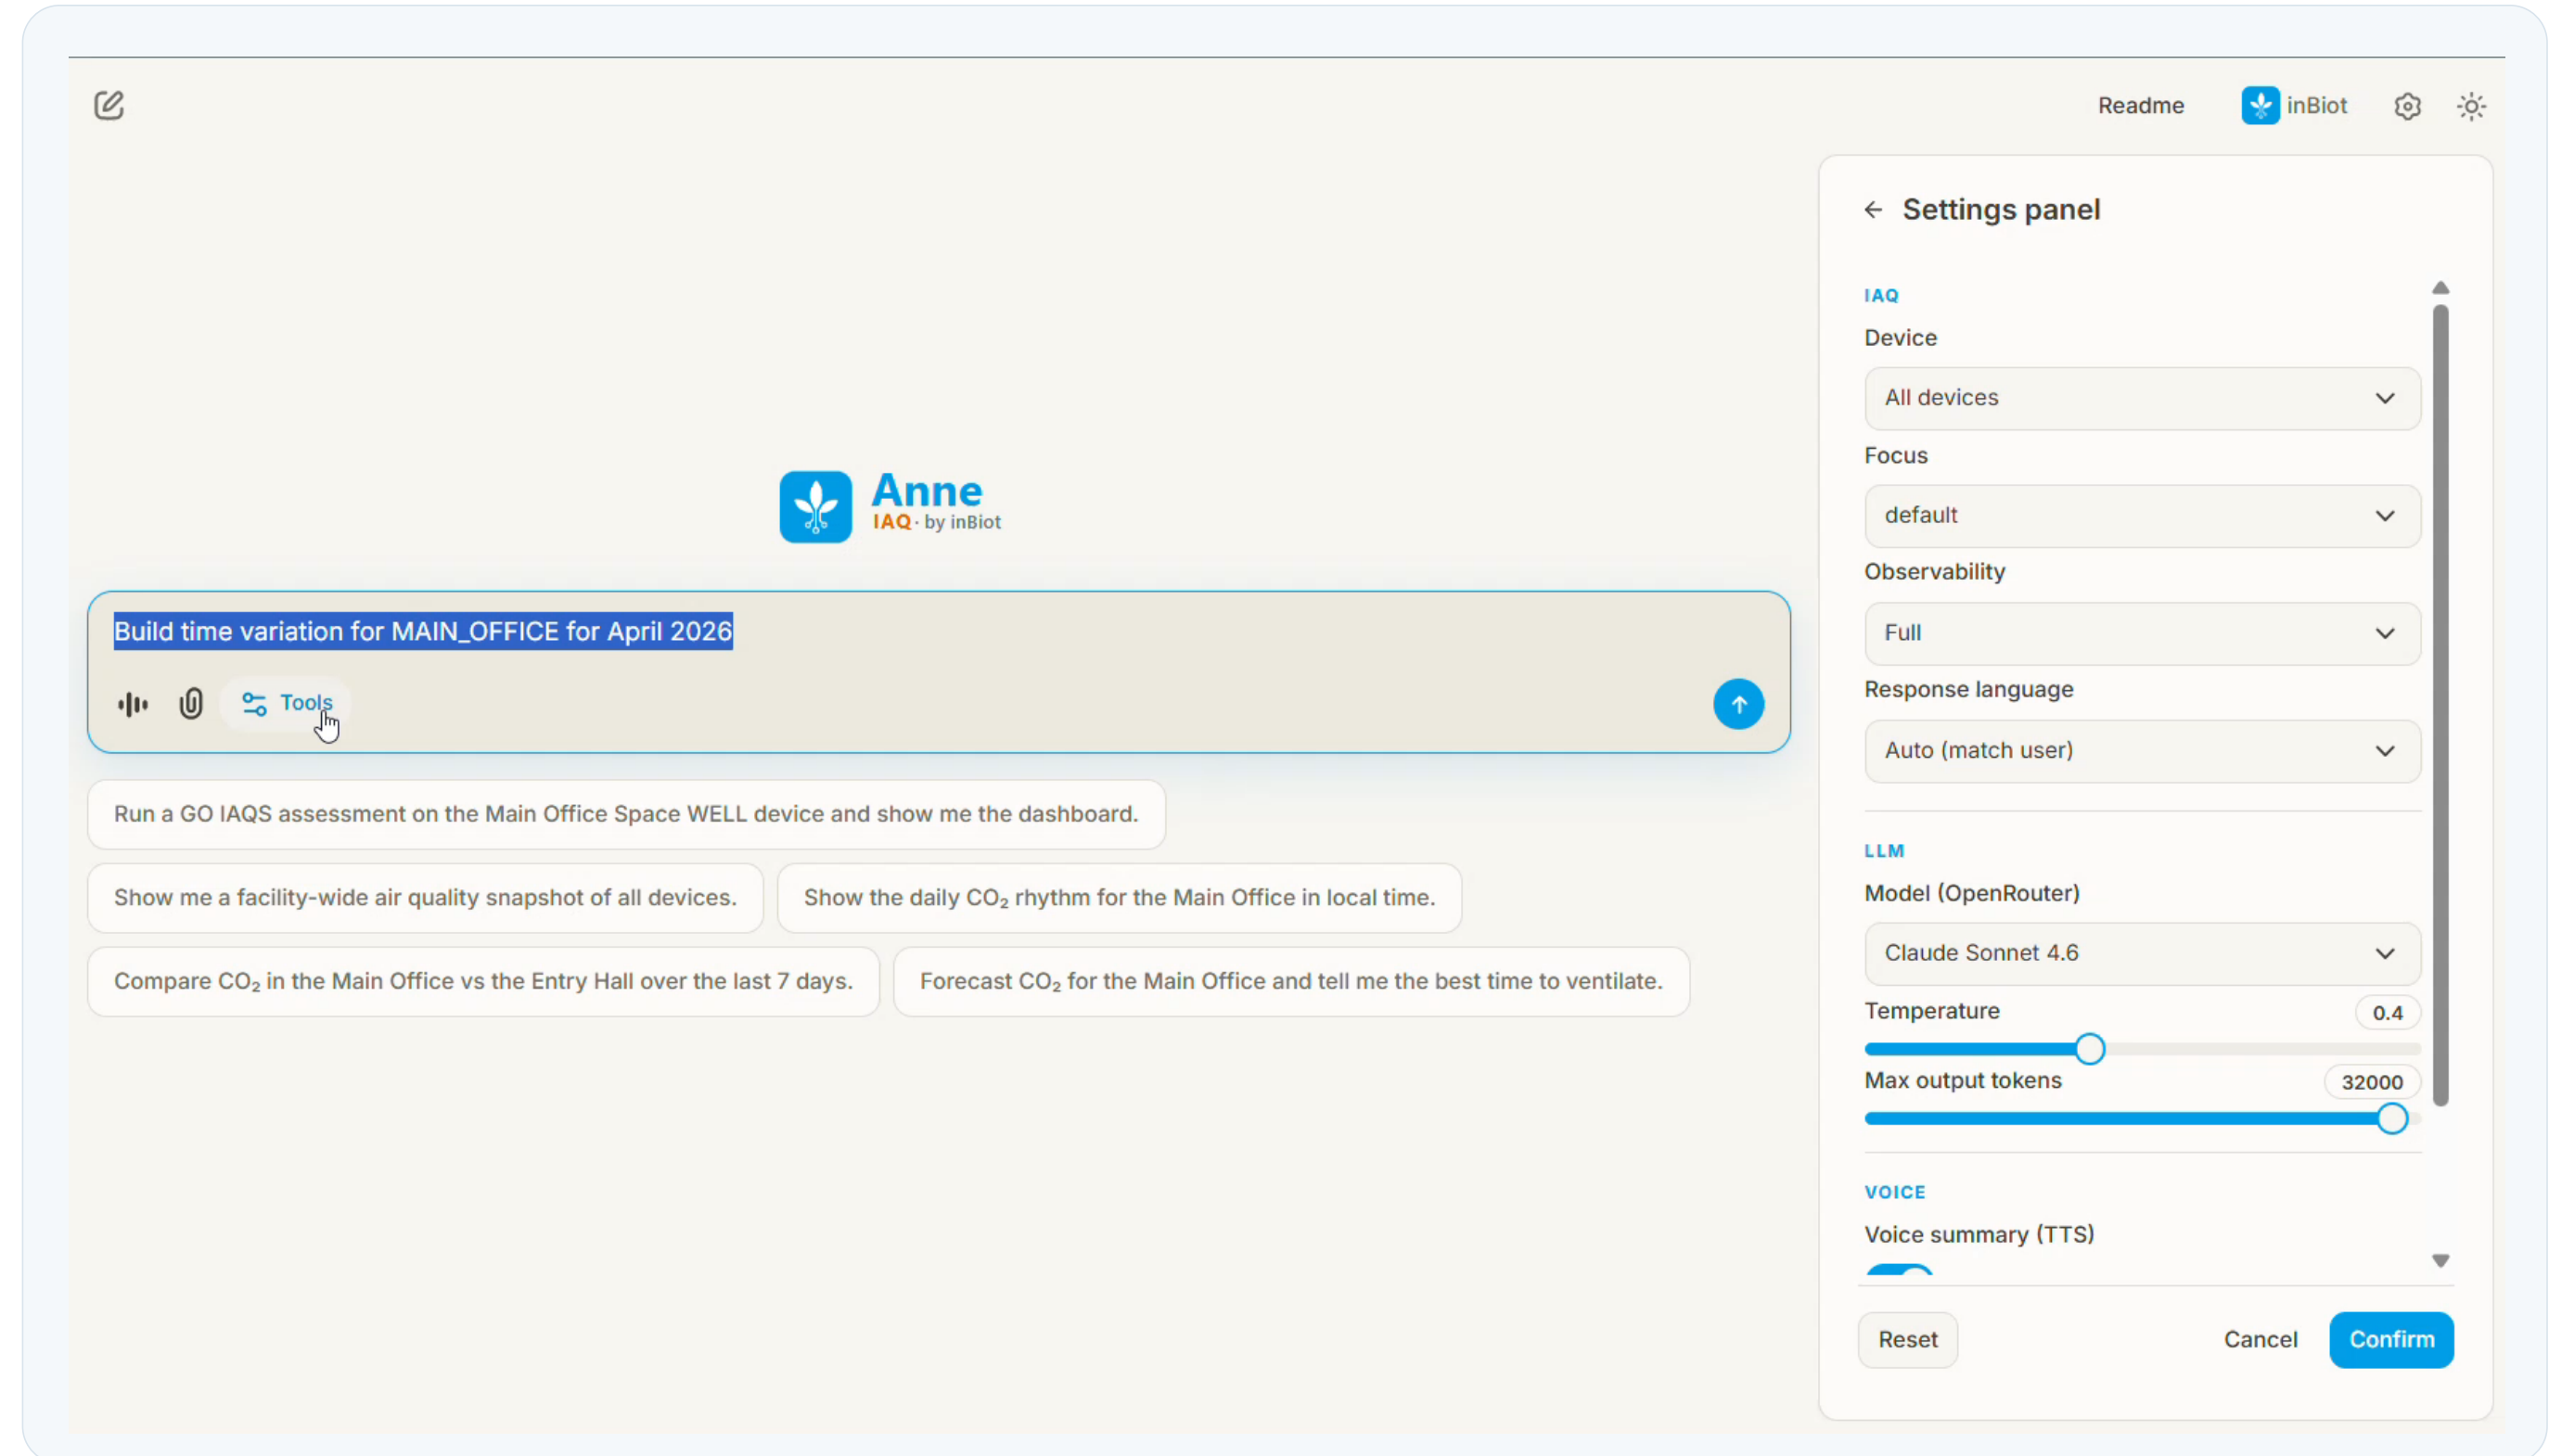

ROADMAP

It's not a chatbot. It's not an agent. It's not a Digital Twin.


00 **+ Independence**
LLMs Open Source?




01 **+ Data + Users**
Early Adopters

02 **+ Runtime**
+ HRL

A harness for every task
Dynamic workflows in Claude Code

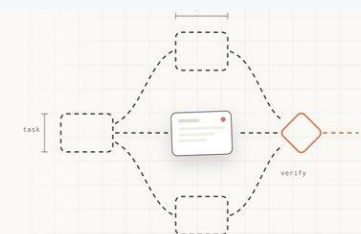

03 **+ Memory**
Reliable persistence across sessions / users / buildings

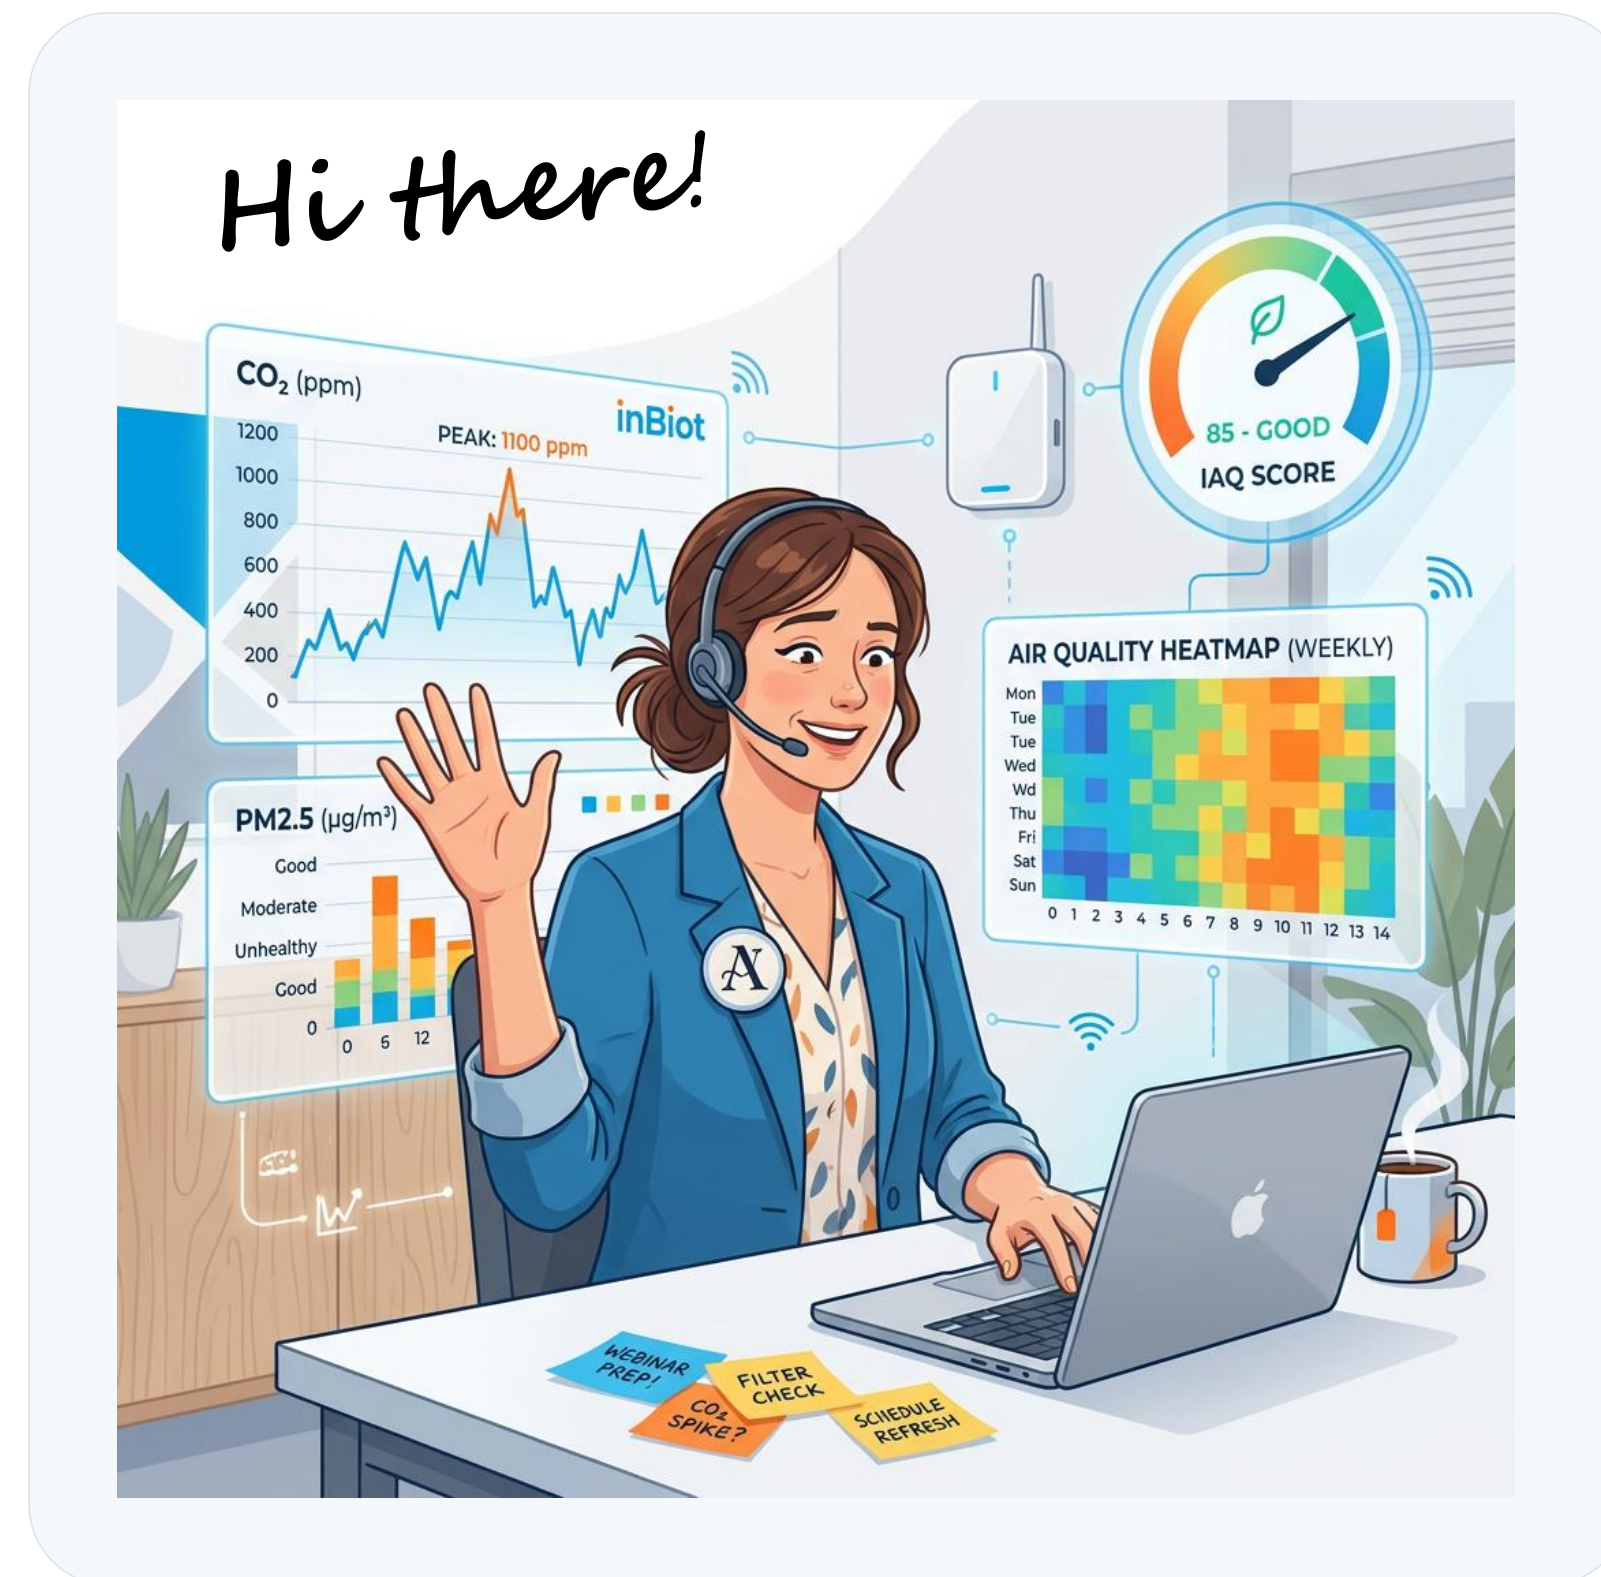


 SECTION 05

Scenarios & Use Cases for AI

[Home](#) · [School](#) · [Office](#) · [Healthcare](#) · [Civic](#)


05 SCENARIOS

At Home: There is a wildfire outside. Am I safe inside?

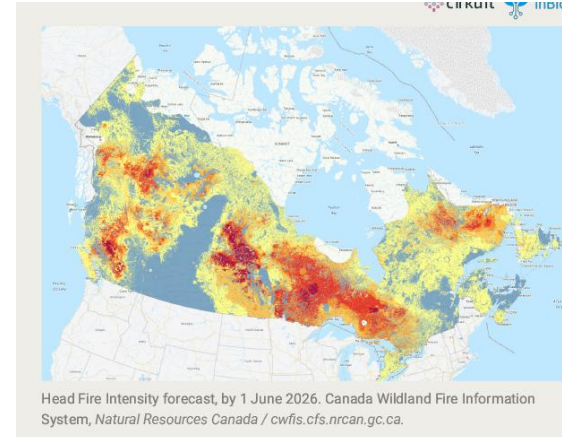



This time was different: the model traced smoke from 800km away, North-East

Fires in northern Saskatchewan and Manitoba sent smoke south and west into the Alberta foothills, on the return flow of a departing low-pressure system. Source: CAMS / ECMWF Fire Emissions Watch.

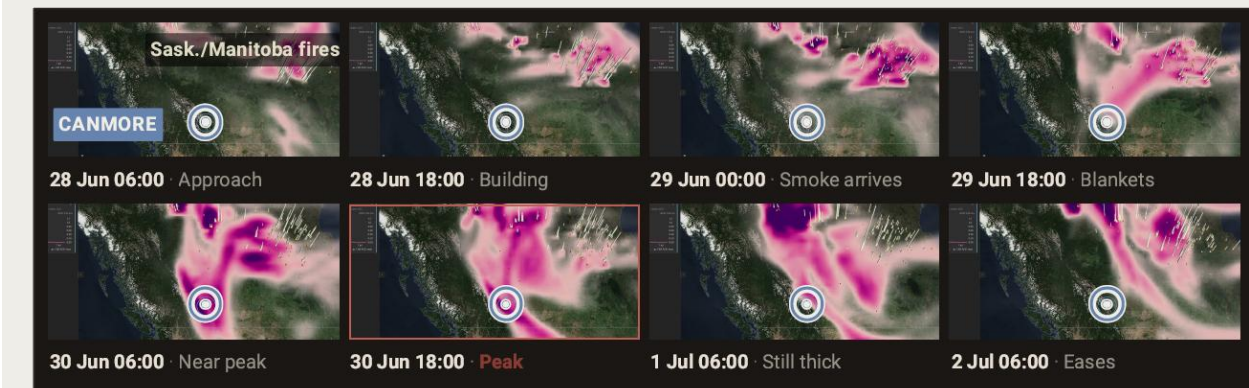

Smoke's PM2.5 peaked and blanketed the whole region on Jun 29th

Smoke filled the valley. Staff checked the usual outdoor numbers and they were all bad: Calgary, Banff, Golden, here. Stay indoors was the advice. The question was whether that was enough, and nobody could answer it from a public map alone.

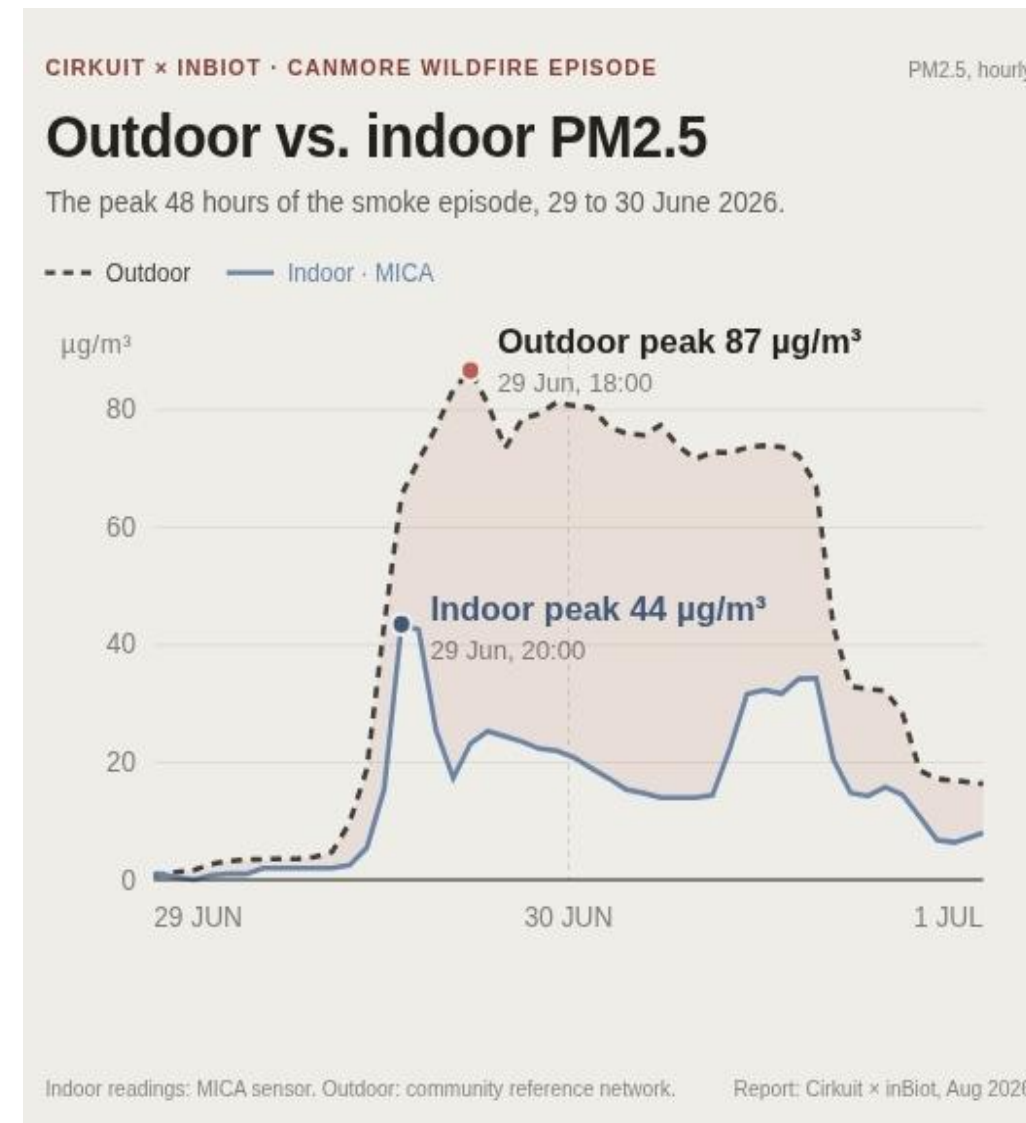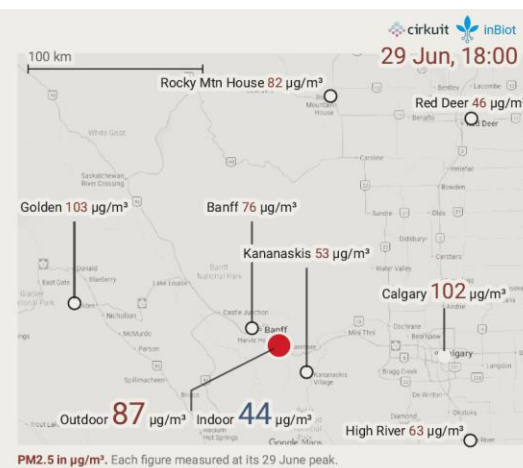

Six sources

Indoor measurements, community monitors, official stations, satellite imagery, modelled forecasts, and public notices were read together after the smoke had passed.



Before and after

Before: aligning those clocks and writing one reading required hours of gathering and cleaning data, python, managing csv... designing and producing the reports

Now: A full 20 slides report in 4 hours

05 SCENARIOS

At School: should we ventilate this class, or send the children home?

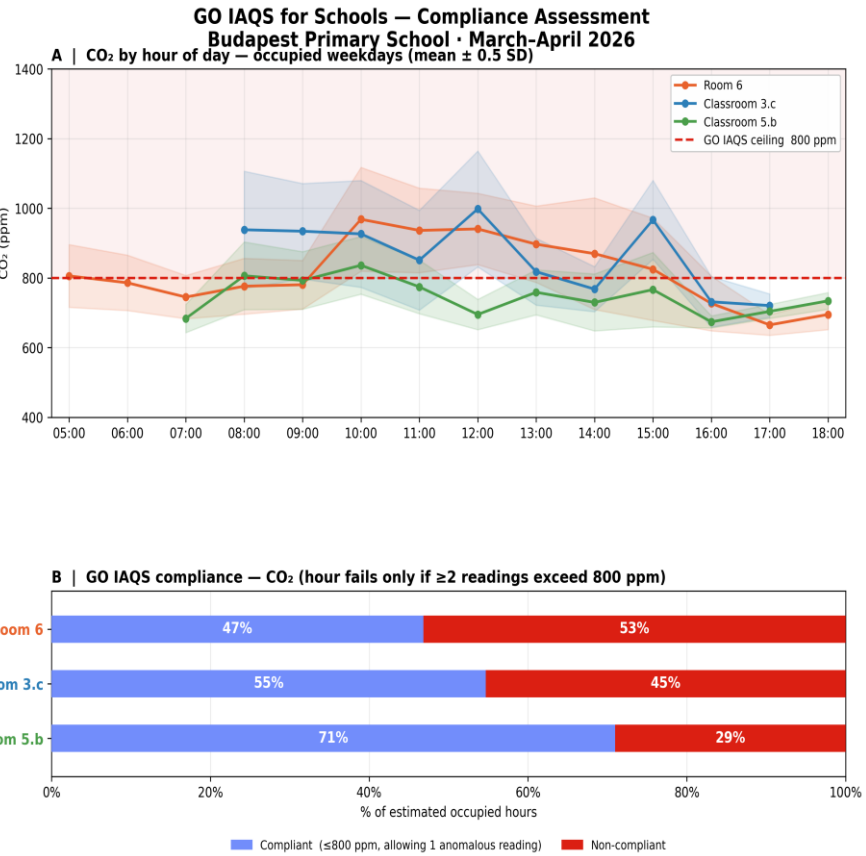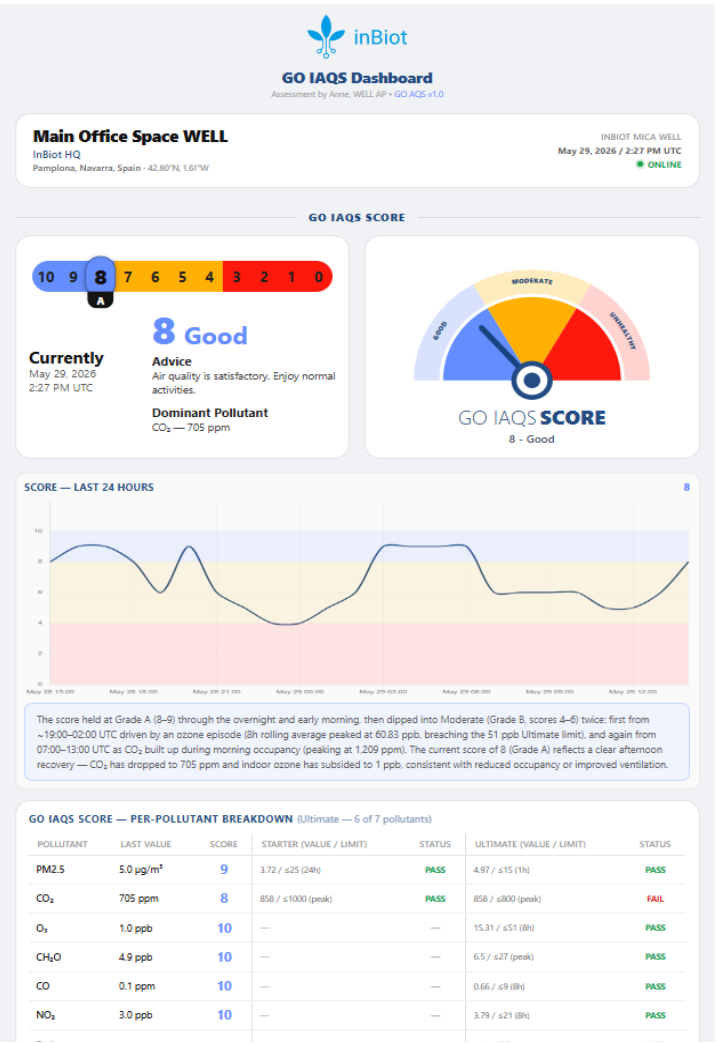

From the API

Classroom records were pulled through the API, occupied hours were identified, and compliance with GO IAQS Schools was scored.

The figures

Every chart and statistic in the study was produced in that same pass.

Before and after

Before: extracting the series, scoring the rooms, and drawing this pack by hand was a week of careful analysis.

Now: the same pack comes out of one pass in 5 minutes.

Anne designed, built and interpreted these figures.

GO IAQS for Schools Strategic Plan (EN20260611-1), May 2026 · Step 1 baseline audit · Budapest primary school, March to April 2026

05 SCENARIOS

At the Office: I spend 8h every day at the office. What am I exposed to?



Anne designed, built and interpreted this figure.

Agent to agent

The inBiot agent passes a carbon dioxide forecast and a natural-language reading to the BMS agent, so the building system receives both.

Before and after

Before: the ventilation hour and a readable sentence for facilities were a specialist's morning note.


Now: the two agents can exchange both every morning.

05 SCENARIOS

At the Hospital: Designing a sensor network for comfort & exposure risk

FLOOR 1 / HOSPITALIZATION WARD

2D plan · schematic, not a survey · sensors as on the original plate

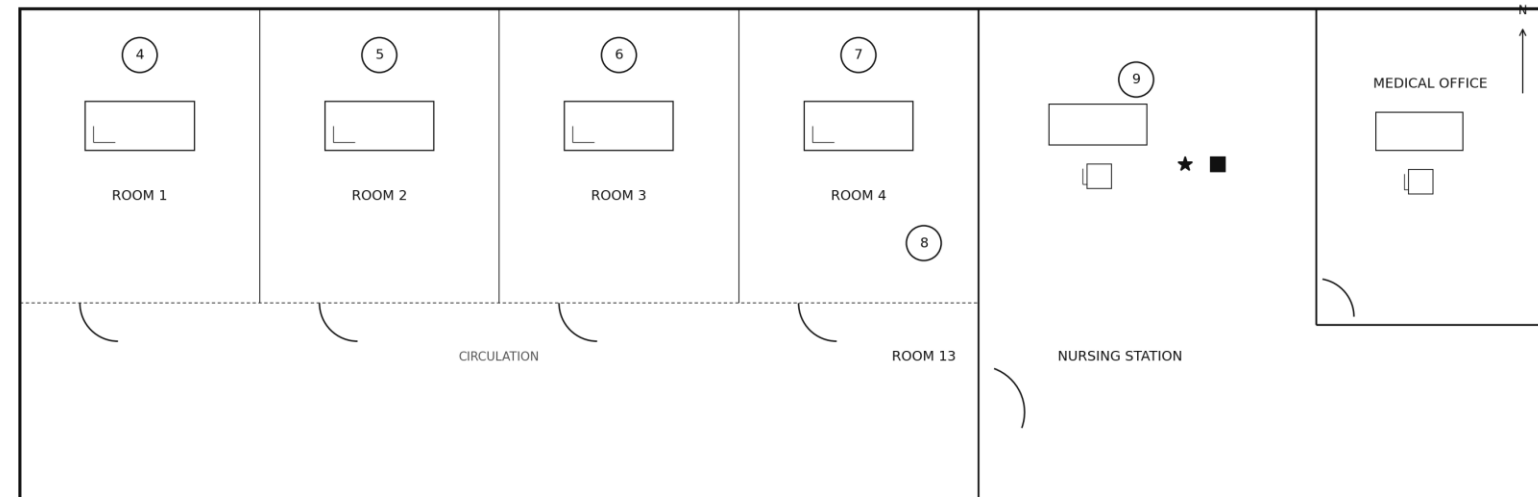

○ Continuous IAQ monitor (MICA)

★ VOC sample

■ Microbiome sample



From the plan


The layout was read room by room: wards, ICU, waiting, pathology, and rooms that do not take a monitor.

Before and after

Before: classifying a hospital plan and returning a placement took a morning with a highlighter.

Now: a generative assistant returns a provisional placement from the same layout in one sitting.

At a Public Space: The hall is crowded. Is the air still safe to stay?

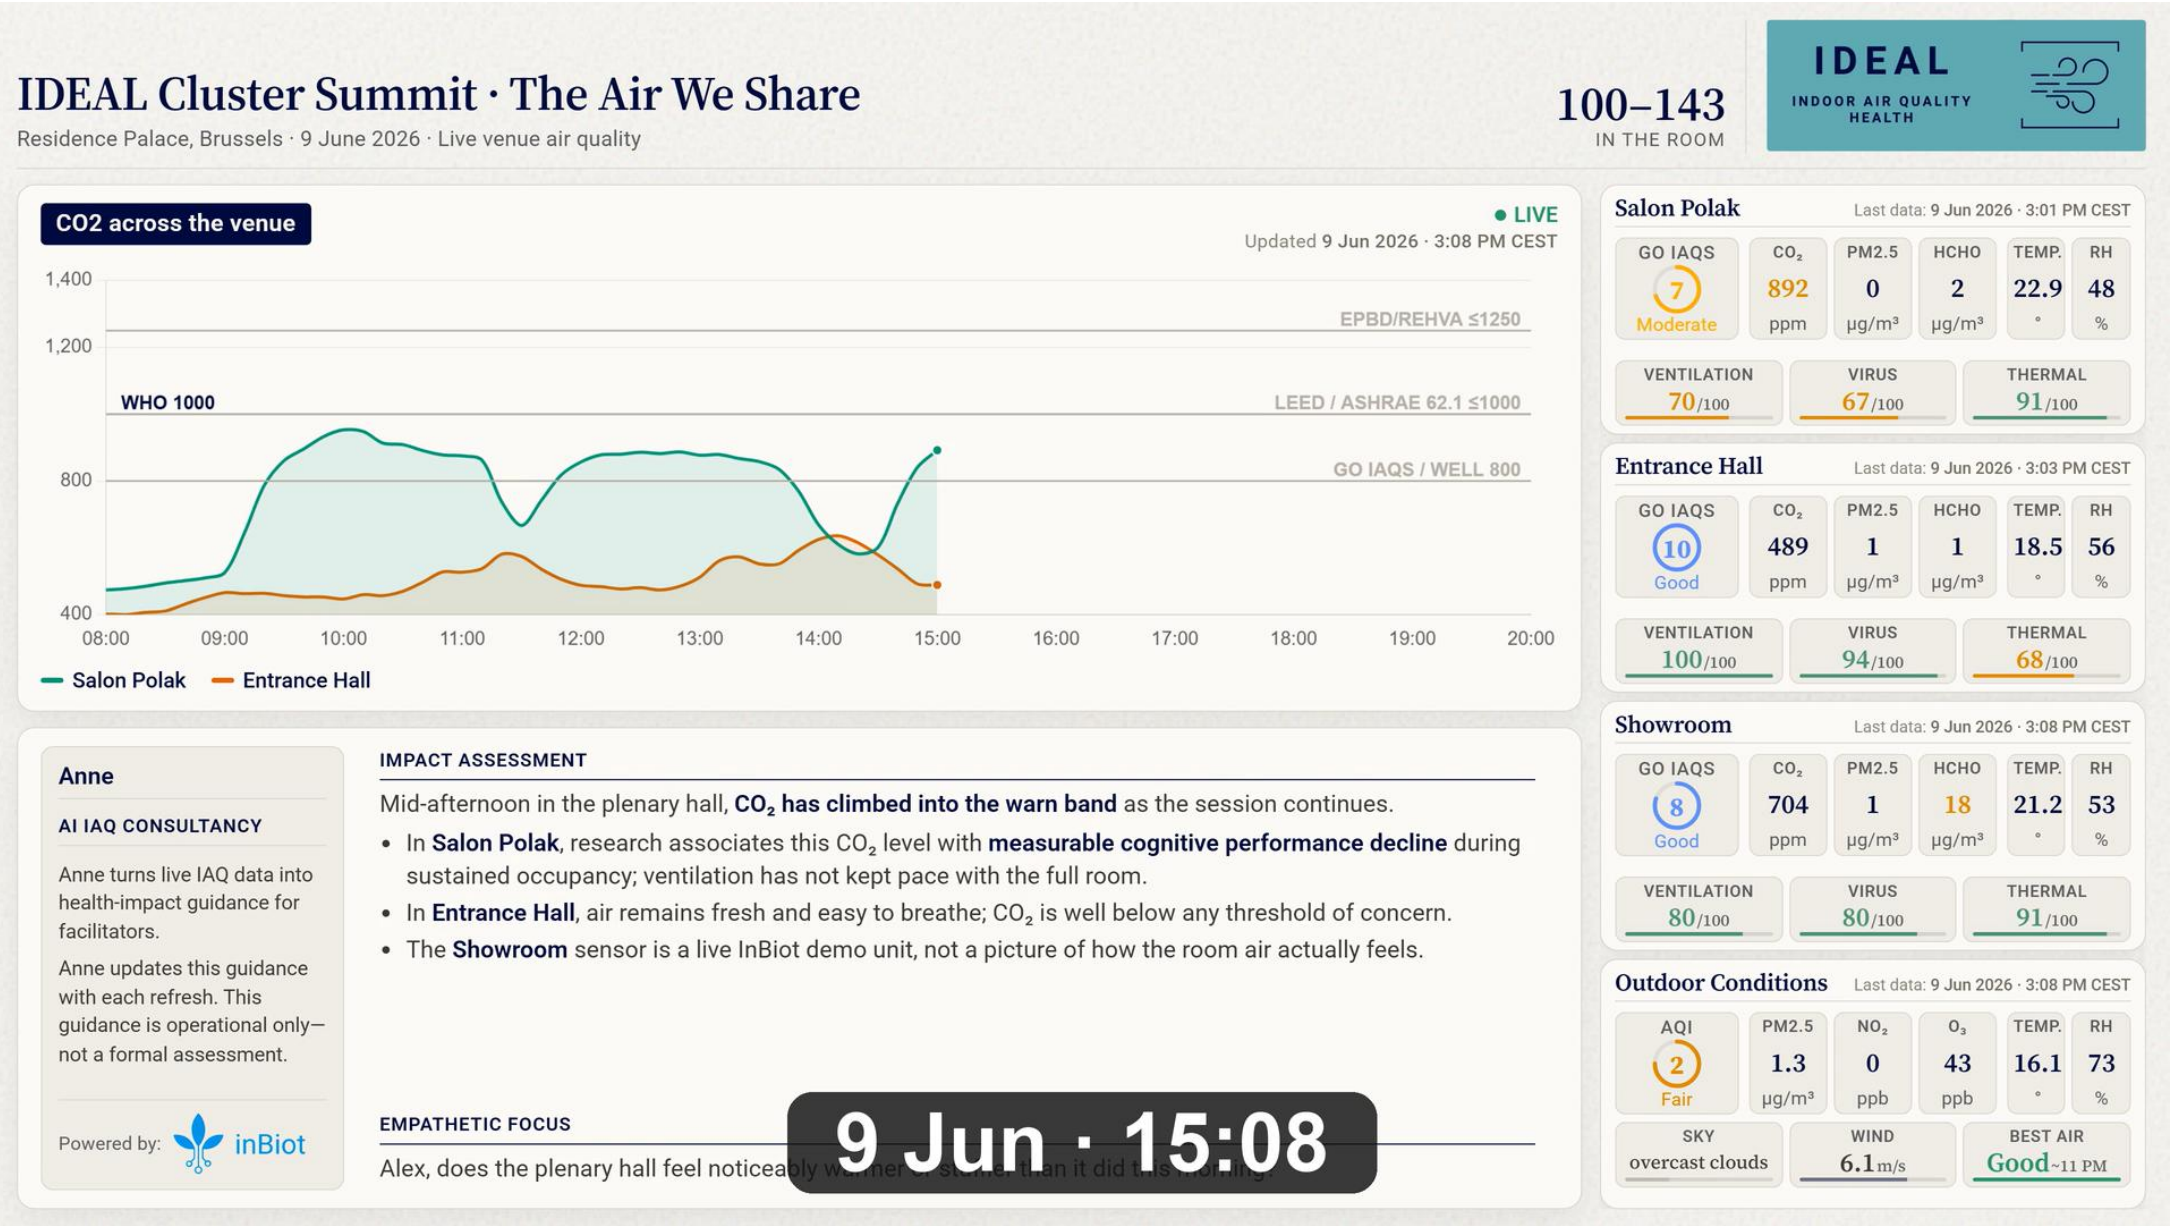

This event

The board was fitted to this hall and this programme in minutes, then refreshed every fifteen minutes with a new natural-language reading.



Before and after

Before: that interface, its copy, and the refresh job were hours of design and software development work.

Now: dashboard built in minutes and refreshed in real time.

Anne wrote the live narrative on this wall. Poster still; Miguel embeds the wall video here at the end.

SECTION 06

Exercises: Build your own agent


<https://github.com/nextairehorizon/Next-Gen-Mentoring>

Seven exercises. The pack is an initiation, not a production system.




Learn by doing

Not like this....

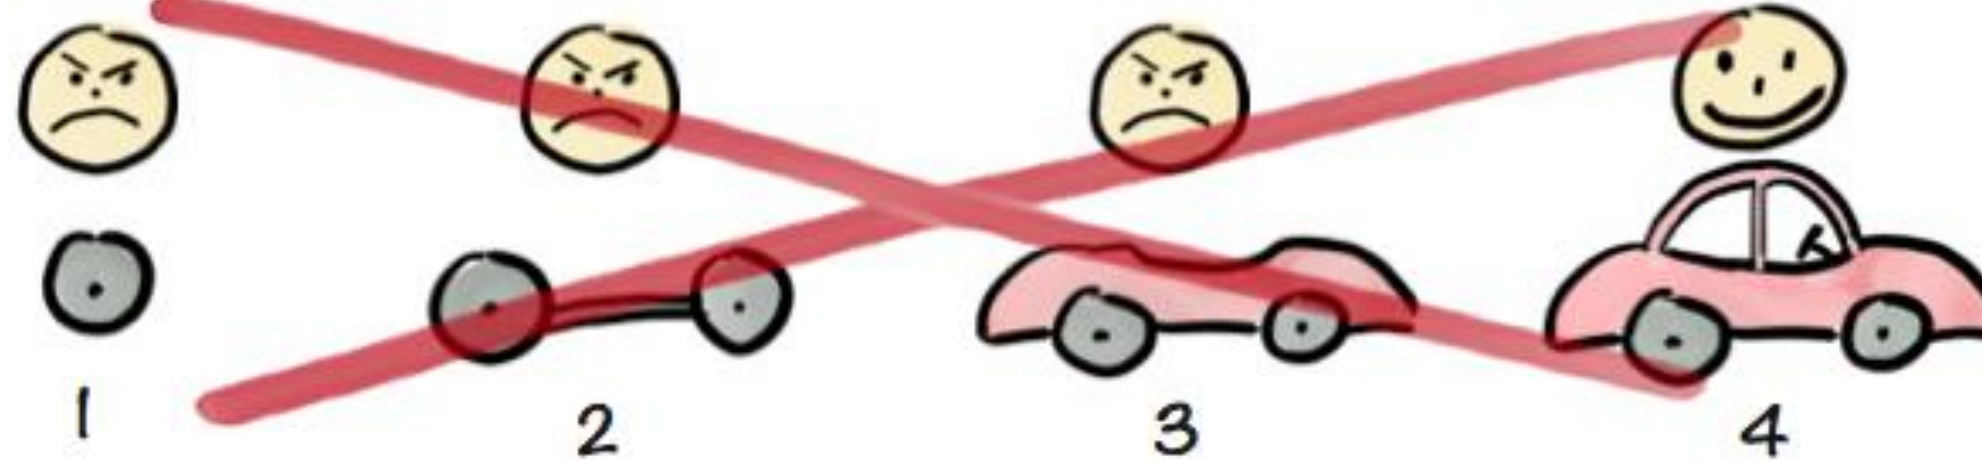

Like this!

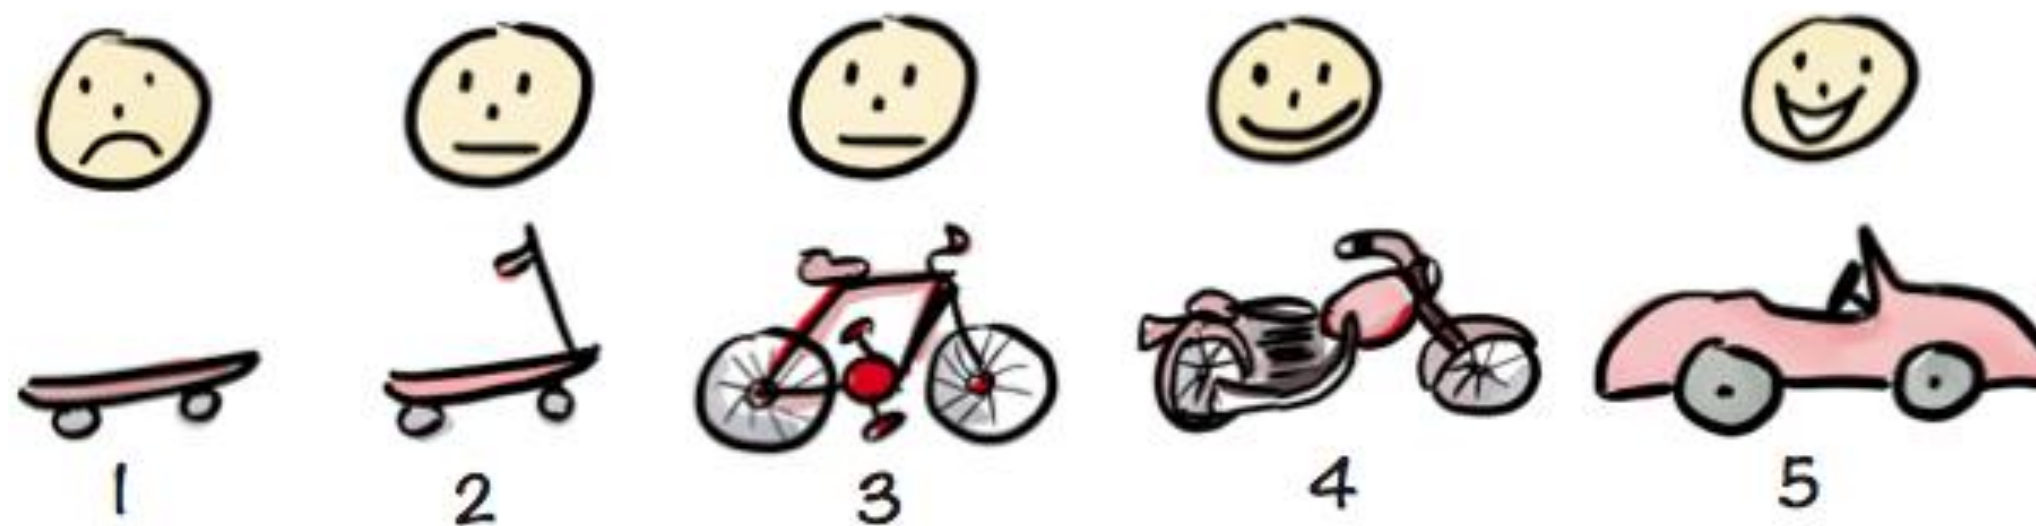

The pack

exercises/ Unzip this folder. It is the project.
Every exercise folder has README.md, AGENTS.md and CLAUDE.md.

- 1

ex1_workspace
The host folder. Open the zip in one IDE.
- 2

ex2_openrouter
settings.local.json.example install-openrouter-models.sh
- 3

ex3_next_air_assistant
next-air-assistant/ the plugin. Also used by 4 and 5.
- 4

ex4_n8n_alerts
daily-open-meteo-alert.json
- 5

ex5_chainlit
app.py llm.py tools.py brain.py Start Next-Air-Assistant.bat
- 6

ex6_openair
README only. The MCP server is the openair kit.
- 7

ex7_always_on_host
README only. Hermes Desktop, first look.

next-air-assistant/
Markdown and JSON. No application code.

agents/
next-air-assistant.md. Persona, OODA, the pause.

skills/
assess forecast-co2 open-close-filter-stay help

knowledge/
thresholds.md preconditions.md

commands/
/assess /forecast-co2 /help /open-close-filter-stay

mcp.json
Open-Meteo outdoor air and weather. Tavily search.

adapters
plugin.json Claude Codex Cursor VS Code

examples
classroom_co2_24h.csv synthetic, 10-minute steps

Host, harness, model: the three words of Next-Air-Assistant

HOST

The runtime

The application where the agent actually runs: Cursor, Claude Code, Codex, Antigravity, n8n. Each host ships its own window, rules, and way of calling tools.

HARNESS

What the host wraps around the model

Tools, context, permissions, the pause before a decision. Commercial apps sell host and harness together. A plugin such as Next-Air-Assistant joins that harness and augments it.

MODEL

The language model

Here often a free one through OpenRouter. The same model feels different in two hosts because the harness changed.

THE POINT

A model on its own can think. It cannot fetch a number or open a window. The harness lets it call tools.

Outdoor air in the pack: CAMS through Open-Meteo, modelled, not a station. MCP into the host you already use is where the field is converging.

06 EXERCISES

Exercise 1 · Choosing a host (AI app or IDE)

GOAL	You are inside a host you did not write.
HOST	The IDE you open: Cursor, Visual Studio Code, Claude Code, Codex, Antigravity, or Grok. That application is the runtime.
HARNESS	Whatever that product already ships: its chat, its rules, and an MCP client if it has one. You have not added Next-Air-Assistant yet.
MODEL	The IDE default.
PRACTICE	Open the folder that contains ex1_workspace in one host. That zip is the project. Commercial apps sell the host and the harness together. Do not create a second empty folder.



Cursor




Visual Studio Code



Claude Code



Codex



Antigravity



Grok

Cursor cursor.com · Visual Studio Code code.visualstudio.com
 Claude Code claude.com/product/claude-code · Codex openai.com/codex
 Antigravity antigravity.google · Grok grok.com

06 EXERCISES

Exercise 2 · Enabling OpenRouter to use free LLMs

GOAL
HOST
HARNESS
MODEL
PRACTICE

Learn how the model is swappable. The host stays the same.

The same IDE you opened in exercise 1. You do not switch hosts.

Same as Ex-1.

One you pick on OpenRouter. A :free model is enough. A working default today is nvidia/nemotron-3.5-lightning:free

Create an OpenRouter key, keep it on your machine, and send a short message from that host.

Cursor, Antigravity, and Visual Studio Code take the OpenAI-compatible URL.

Claude Code stays Claude Code: copy settings.local.json.example to the pack .claude/settings.local.json, or run install-openrouter-models.sh.


CLAUDE CODE WIRING

```

ANTHROPIC_BASE_URL="https://openrouter.ai/api"
ANTHROPIC_AUTH_TOKEN="sk-or-v1-..."
ANTHROPIC_API_KEY=""
ANTHROPIC_MODEL="nvidia/nemotron-3.5-lightning:free"

```

Wiring by Francesco Bardozzo, ISSAI 2026.

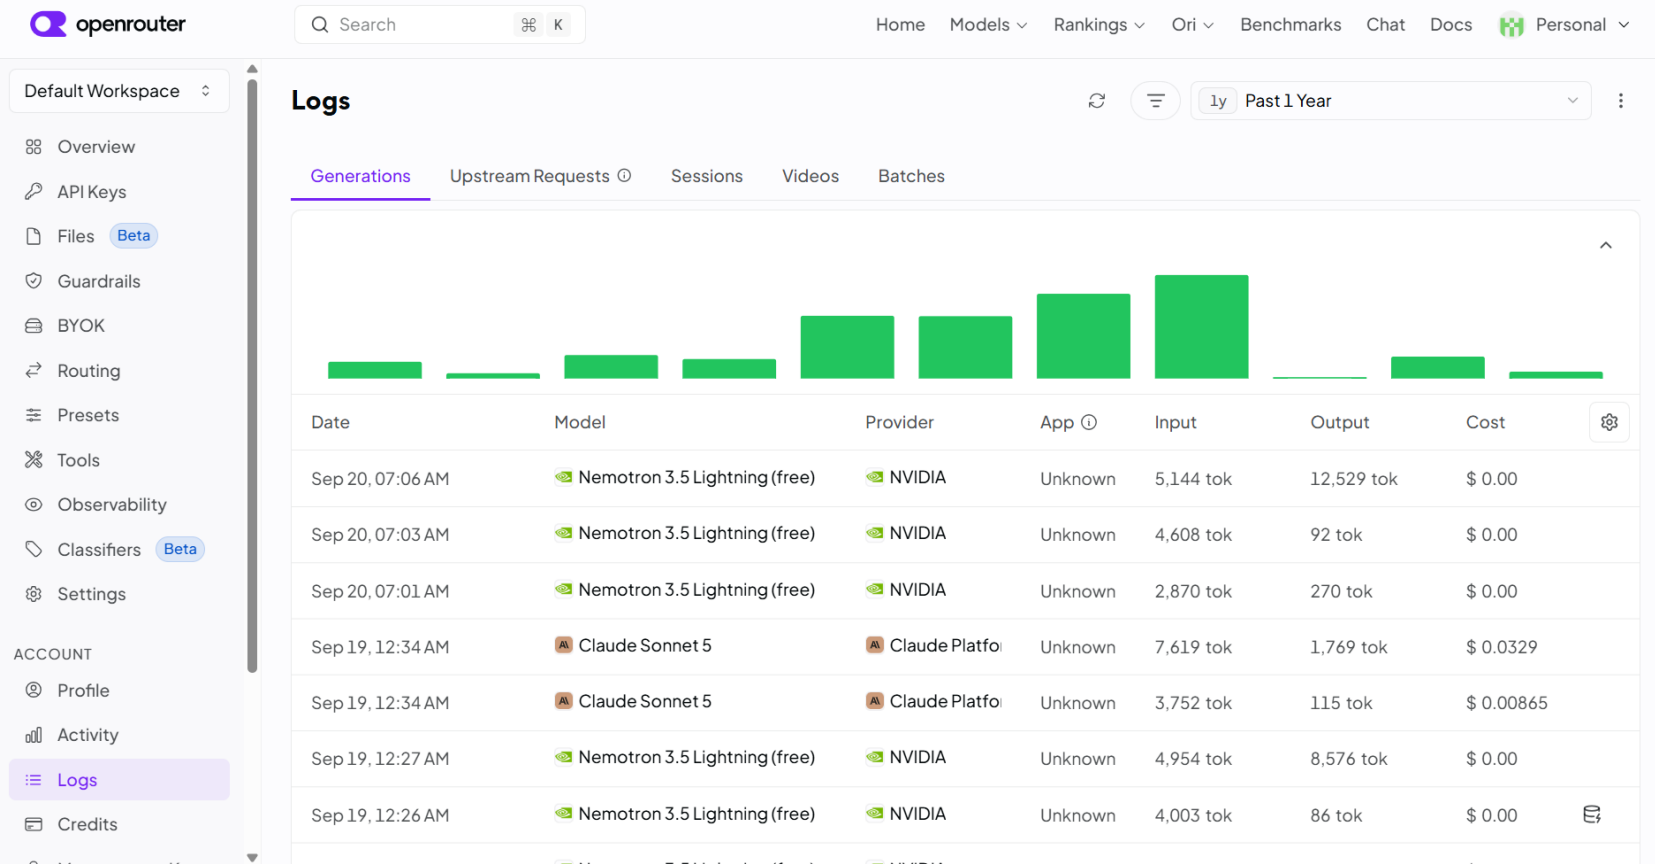



openrouter
OpenRouter openrouter.ai

06 EXERCISES

Exercise 3 · Customizing your agent: Next-Air-Assistant as a plugin

GOAL	Learn how to augment the harness with new skills and tools
HOST	Still the IDE from exercise 1. The plugin runs inside that runtime.
HARNESS	The host already has one: chat, tools, context, permissions, the loop. Next-Air-Assistant is a plugin. It joins that harness and augments it (agent, skills, knowledge, Open-Meteo and Tavily as MCP). The pause in Decide exists because this host is interactive.
MODEL	OpenRouter from exercise 2, or the host's own model if you skipped that wiring.
PRACTICE	In the unzipped pack, in Claude Code: <code>claude --plugin-dir ./ex3_next_air_assistant/next-air-assistant</code> . Then try these three prompts.
SEVILLE	<i>I teach about twenty-five children in a primary classroom in Seville, Spain. We have no indoor sensor and no mechanical cooling, but we can open the windows. One child is sensitive to heat. I need to plan next week's afternoons.</i>
PORTO	<i>I am at home in Porto, Portugal. Wildfire smoke outside. I can close windows and I have a portable filter. I have asthma, not copied into Active. Should I close and filter?</i>



Open-Meteo MCP open-meteo.caseyjhand.com/mcp



Tavily MCP mcp.tavily.com/mcp

next-air-assistant/ One folder of markdown and JSON, no code. It loads in Claude Code, Codex, Cursor and VS Code.	
agents/	Persona, the five-step loop, and the pause before Decide.
skills/	assess, forecast-co2, open-close-filter-stay, help. One SKILL.md each.
knowledge/	thresholds.md and preconditions.md: the numbers the model must not invent.
commands/	/assess, /forecast-co2, /open-close-filter-stay, /help. Slash entry points.
mcp.json	open-meteo for outdoor air and weather, tavily for web search, both over HTTP.
adapters	plugin.json, .claude-plugin/, .codex-plugin/, .cursor-plugin/, .vscode/mcp.json, AGENTS.md, CLAUDE.md



06 EXERCISES

Exercise 4 · Building the agent with n8n: situational intelligence in your mail inbox

GOAL Same outdoor call, another host, and the morning schedule has no pause.

HOST n8n (Cloud or self-hosted). Every run is stored under Executions.

HARNESS This canvas: collect outdoor numbers, then an agent with tools. The 07:00 schedule has no human pause. Chat in the editor does not send mail.

MODEL OpenRouter, same key as exercise 2. The JSON ships nvidia/nemotron-3.5-lightning:free so a first run works. Switching that node to a more reliable model (and back) is part of the exercise.

PRACTICE Import daily-open-meteo-alert.json, attach credentials, Test workflow once, then change the model and run again. Then you may set Active for 07:00. This is an initiation, not a production alert.





Telegram

<https://telegram.me/BotFather>



n8n

n8n n8n.io

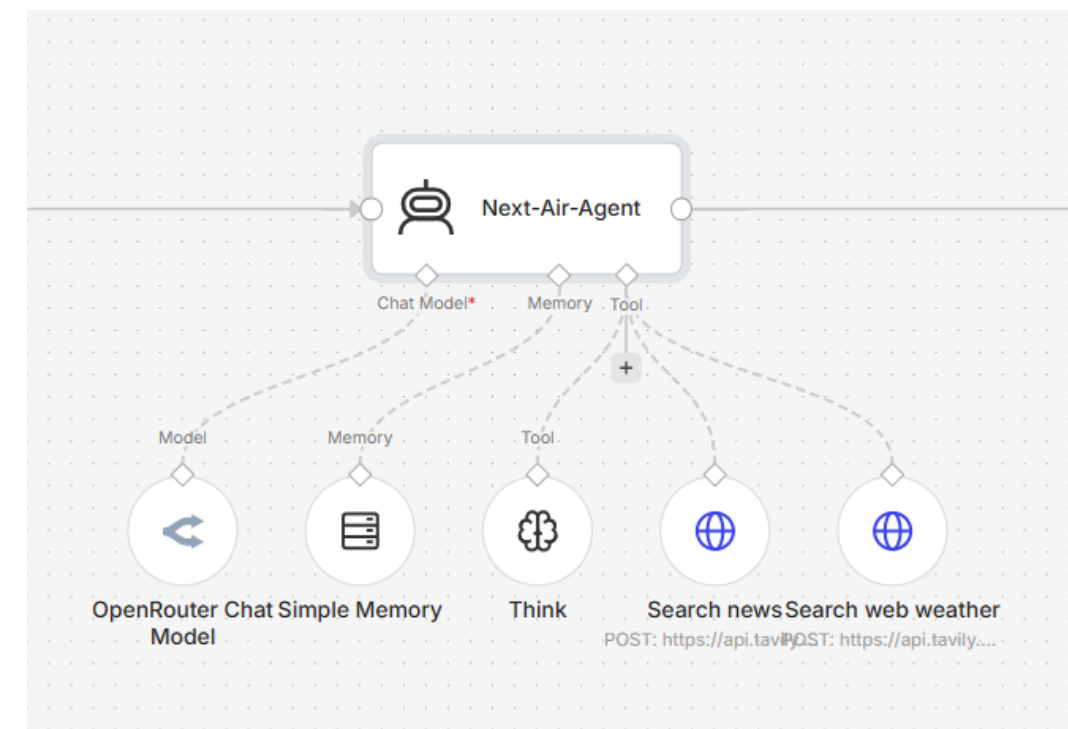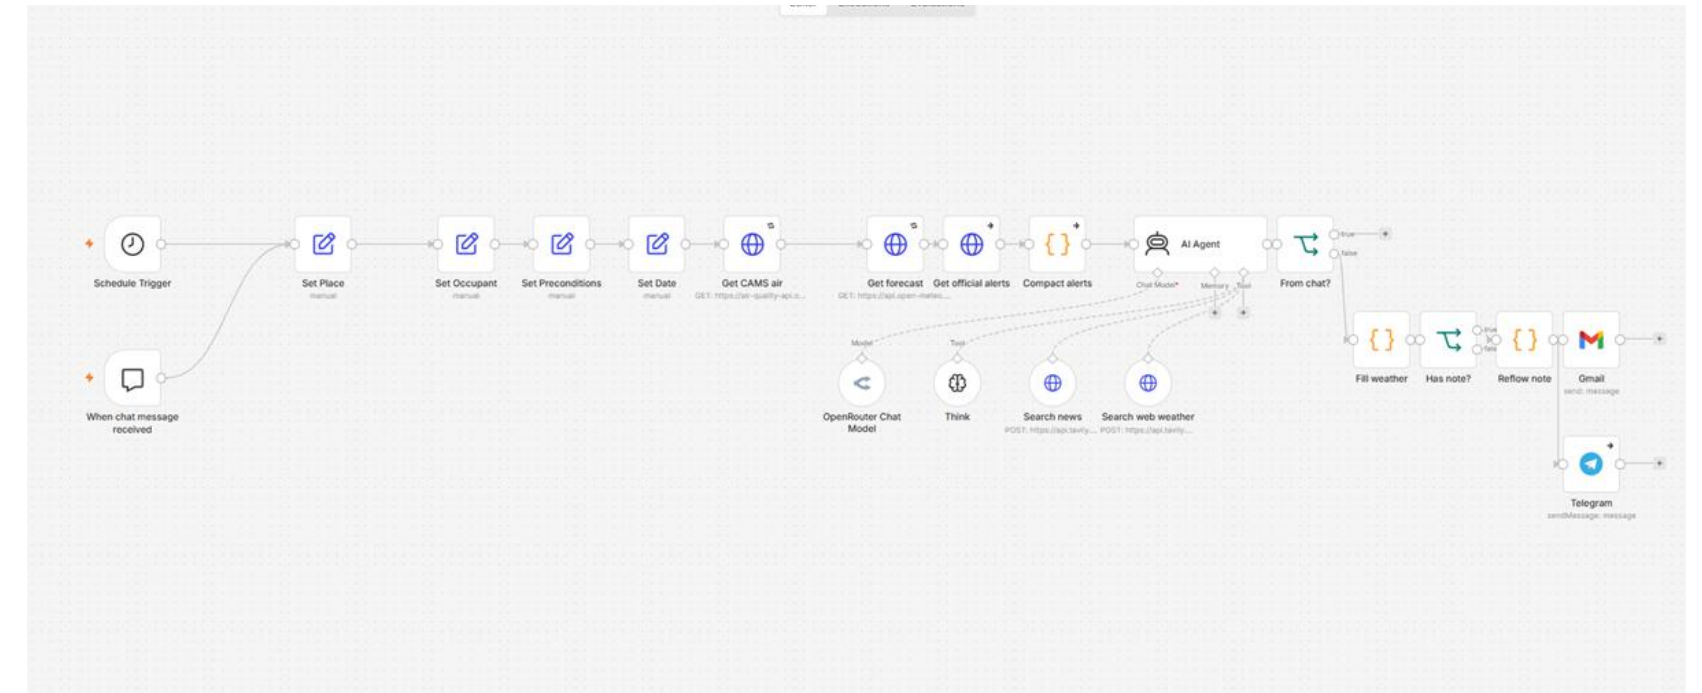

06 EXERCISES

Exercise 5 · Building with Chainlit & Langchain: a local chat

- GOAL

n8n is a workflow. This is a chat. Same outdoor feed, different host.
- HOST

This small Chainlit app. It runs on your machine and opens in the browser. You own the runtime.
- HARNESS

LangChain create_agent wraps the model (chat, tools, context, the pause). Next-Air-Assistant from exercise 3 is loaded from markdown (agents/, skills/, knowledge/) and augments that wrap.
- MODEL

OpenRouter. Same key as exercise 2. The sidebar lists :free models first, then paid slugs if you add credit.
- PRACTICE

On Windows, double-click Start Next-Air-Assistant.bat, paste the OpenRouter key into .env, and wait for http://localhost:8000. On macOS or Linux, run ./run.sh. You do not install the plugin into Cursor for this step. Do not ask this host to invent a dashboard.
- INSPIRATION

VayuBuddy does this for India's public sensor data: a question in plain words, code and tools that fetch the numbers, an answer in plain words. This host is where you build the same thing for your room.

I teach about twenty-five children in a primary classroom in Seville, Spain. We have no indoor air sensor and no mechanical cooling, but we can open the windows. One child is sensitive to heat. I need to plan next week's afternoons: please look up outdoor air and heat, then pause before you tell me whether to open, close, filter, or stay indoors.

Outdoor snapshot: Seville, Spain (Europe/Madrid, UTC+2)

Source: Open-Meteo / CAMS (modelled outdoor grid, not a street station) | Clock: 2026-09-20 20:00 Europe/Madrid (CAMS) / 20:45 Europe/Madrid (weather)

What	Value	Unit	Band / note
European AQI	34	–	Good (0-20 Good, 21-40 Fair, 41-60 Moderate)
PM2.5	6.2	µg/m³	Well below WHO 24-h guideline (15 µg/m³)
PM10	12.2	µg/m³	Well below WHO 24-h guideline (45 µg/m³)
NO2	5.7	µg/m³	Well below WHO 24-h guideline (25 µg/m³)
O ₃	87.0	µg/m³	Below WHO 8-h guideline (100 µg/m³)
Now temperature	30.1	°C	

Type your message here...

assess

forecast-co2

help

open-close-filter-stay

LLMs can make mistakes. Check important info.

Readme

Settings panel

OpenRouter model

nvidia/nemotron-3.5-lightning:free

Temperature (0 = steadier, 1 = more varied)

0.3

Max output tokens (cuts the reply if the model runs long)

4096

Reset

Cancel


Confirm




06 EXERCISES

Exercise 6 · Adding openair tools: an MCP for deterministic chart analysis

- GOAL** A tool, not a new host.
- HOST** One you already used. Default: the IDE from exercise 1.
Optional: the local chat app from exercise 5, or n8n only if it runs on this machine.
- HARNESS** Unchanged. You add an MCP server of plot tools. You do not install a second assistant.
- MODEL** Whatever that host is already using.
- PRACTICE** Follow github.com/miguel-escribano/openair-ai-kit, connect the server to one host, and ask: Use tests/fixtures/felisa_munarriz.json in the plugin repo. Prepare hourly Europe/Madrid, then time_plot all pollutants. MCP tools only. Do not search for data/felisa.xlsx or other server paths. If you cannot run Git, Python, and R, stop after exercise 5.

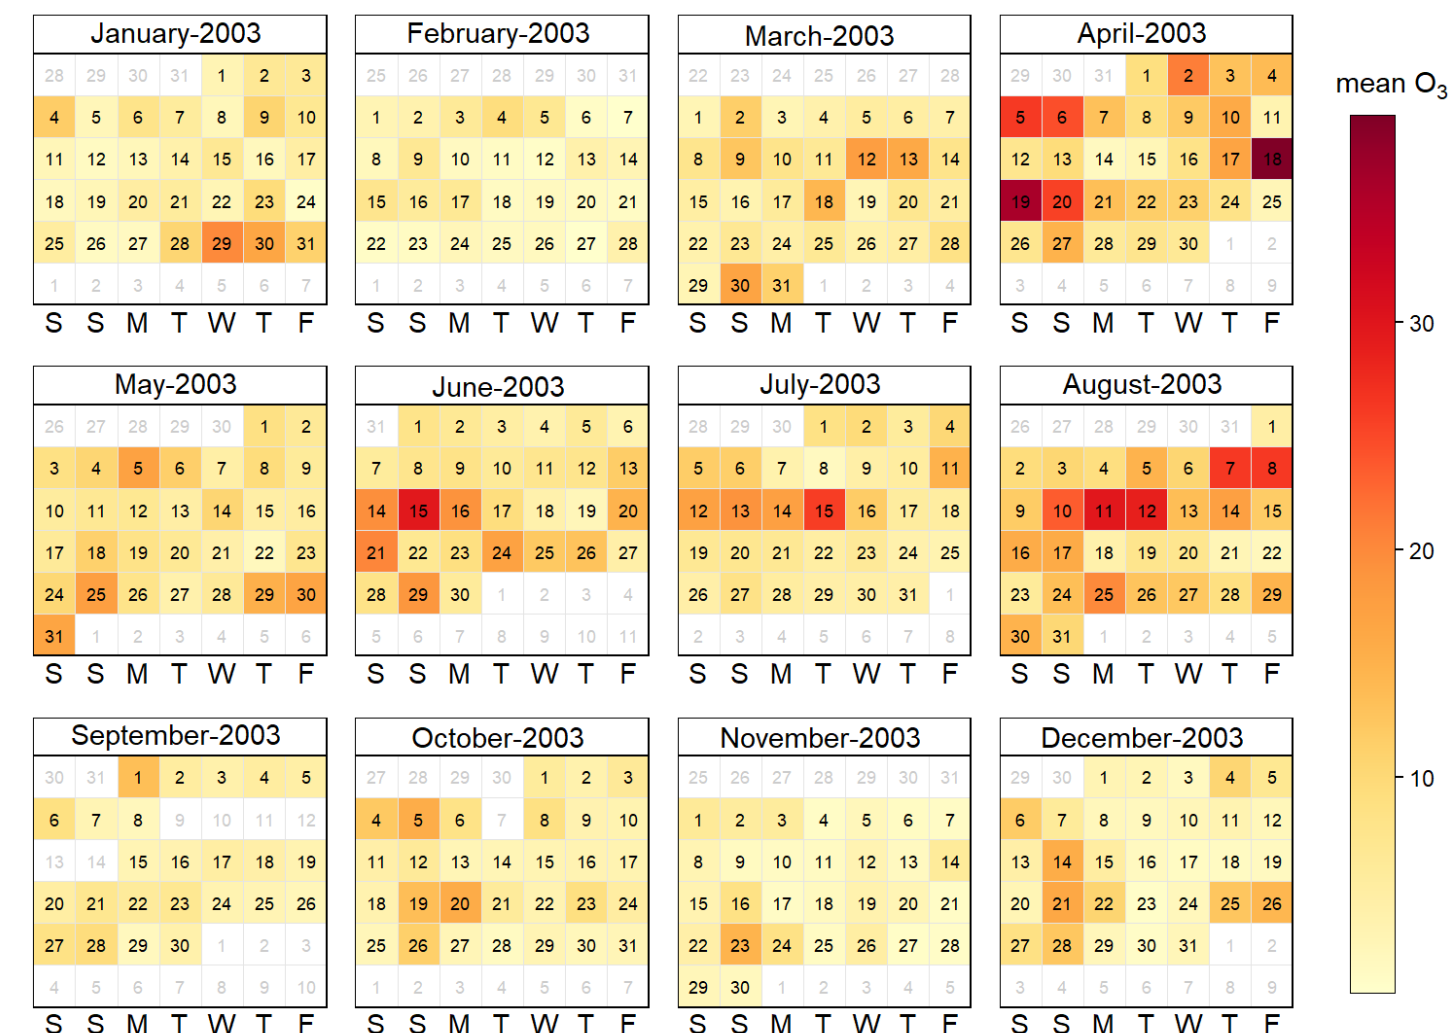

openair davidcarslaw.github.io/openair
openair-ai-kit github.com/miguel-escribano/openair-ai-kit



06 EXERCISES

Exercise 7 · Installing Hermes: an agent that grows with you

- GOAL


Cursor, Claude, ChatGPT, and Grok are commercial hosts you do not own.
- HOST

Hermes Agent on your computer, desktop app first. Not an IDE, not n8n Cloud, not a vendor chat site.
- HARNESS

Whatever Hermes ships (chat, tools, later skills and MCP). Next-Air-Assistant is not wired here yet.
- MODEL

OpenRouter, the same key as exercise 2. Local models can wait.
- PRACTICE

Install Hermes Desktop from hermes-agent.nousresearch.com, paste the OpenRouter key, and send a short message. If it replies, you are done with this first look. Do not start with curl, a VPS, or Telegram.

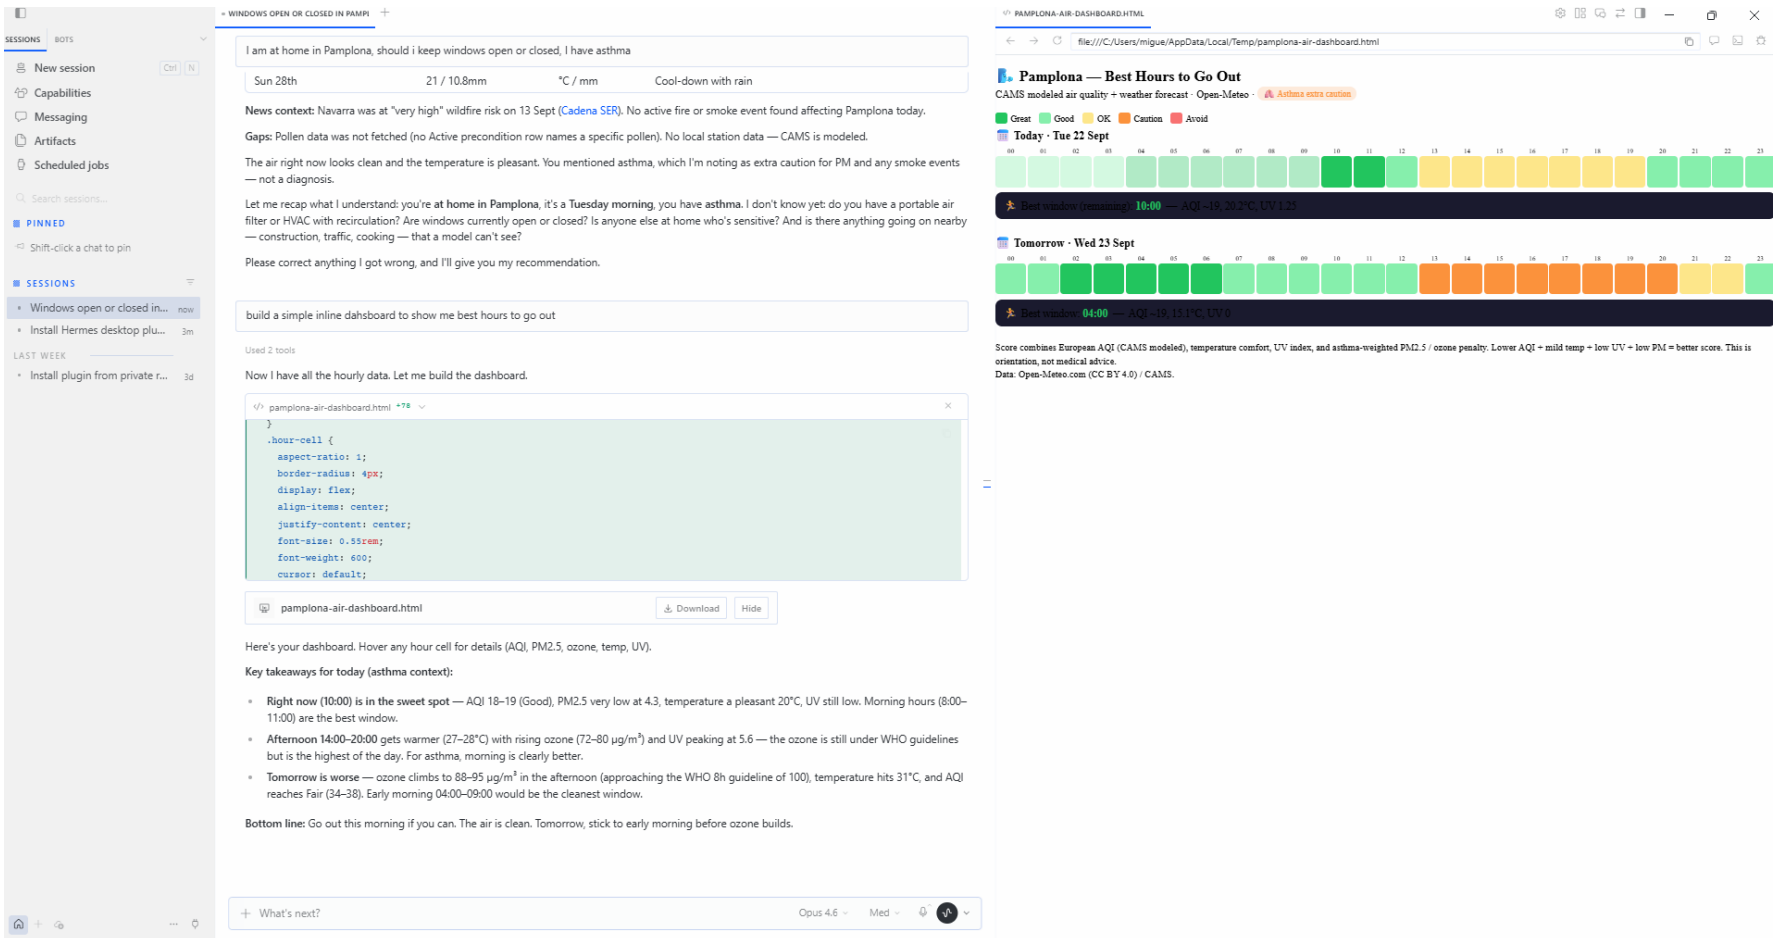

<https://hermes-agent.nousresearch.com/>



Let's build situational AQ intelligence together.

Miguel Escribano Hierro

Head of Revenue Operations, inBiot

mescribano@inbiot.es

www.inbiot.es

Next-Air-Assistant pack

Citizen IAQ assistant

github.com/nextairehorizon/Next-Gen-Mentoring

[github.com/nextairehorizon
/
Next-Gen-Mentoring](https://github.com/nextairehorizon/Next-Gen-Mentoring)