NEZA BAZI PUNJAB CHAMPIONSHIP 2026

November 11, 2026 · Amritsar, Punjab

LIVE STREAM · DATA FEEDS

Live scoring data for vMix

For the live-stream graphics team

During the Neza Bazi Punjab Championship 2026, the website publishes the live scoring as **four public data feeds** that vMix reads directly as Data Sources. Each feed is a list of **flat rows**, in JSON or CSV. **Every column is always present**, so a binding cannot break, and a feed sends **one row of empty values** when there is nothing to show. Set each Data Source to refresh every **1–2 seconds** and your titles follow every judge's result within a second or two.

Read your section

Building titles: read **The four feeds**, **Setting up** and **Screens**, and keep **Columns** open while you bind. On the day, work through **Event day** before you go on air. Each section has its name on the tab at the page edge.

The four feeds — addresses, options and an example 2

Setting up — Data Sources in vMix, and rehearsal 4

Screens — what the organisers want on screen 6

Columns — what every column means 7

Photos — rider pictures for your titles 10

Extras — the bridge script and ready-made overlays 11

Troubleshooting — and what has not been tested yet 12

Event day — the checklist before you go on air 12

Version: 10 November 2026. Check-in: November 10, 2026. Event: November 11, 2026, Amritsar, Punjab.

Questions about this guide or the site: nezabaazipunjab@gmail.com · https://www.nezabazipunjab.com

THE FOUR FEEDS

Addresses, options and an example

What it is

The championship website publishes live scoring as four data feeds that vMix can read directly as **Data Sources**. Every time a judge records a result (Carried 4, Struck 2 or Miss 0), the feeds change. At a refresh of 1–2 seconds your titles follow within a second or two.

Each feed is a **JSON array of flat rows**, or **CSV** with a header row if you add `?format=csv`. **Every column is present on every response**, as text or a number, never missing and never null, so a binding cannot break. When there is nothing to show (before the event, between rounds, an unknown pool or round), a feed returns **one row of empty values**.

> **The four live scoring feeds are public and need no login or key.** They carry what is announced over the PA (rider and team names, horses, district and state, pools, results and standings) and, in current, leaderboard and entrants, **each rider's photo**, given for the broadcast (see Photos). Nothing else about a rider: no contact details, no village.

Addresses

Feed	Address
Current	`https://www.nezabazipunjab.com/api/live/vmix/current`
Leaderboard	`https://www.nezabazipunjab.com/api/live/vmix/leaderboard`
Entrants	`https://www.nezabazipunjab.com/api/live/vmix/entrants`
Rounds	`https://www.nezabazipunjab.com/api/live/vmix/rounds`

The rows each feed sends

- **Current:** one row: the round, the pool, the rider on course, the attempt, the screens' mode and message, and the last result.
- **Leaderboard:** one row per entrant in the live round, ranked.
- **Entrants:** one row per entrant in start order: the start list, with each entrant's progress.
- **Rounds:** one row per round of the day, in running order.

Options

Add options after `?`, and join several with `&`:

Option	Works on	Effect
`format=csv`	all four	CSV with a header row instead of JSON
`sample=1`	all four	Fixed rehearsal data instead of live data (see Rehearsal, under Setting up)
`sample=solo`	all four	Moving rehearsal data: a scripted solo competition that changes every 8 seconds, while the organisers have it running (see Rehearsal, under Setting up)
`sample=demo`	all four	Rehearsal data that follows the organisers' shared demo: whatever the judges do in a practice on their own panel shows here within a couple of seconds. Always on (see Rehearsing with the judges, under Setting up)
`pool=A`	leaderboard	Only Pool A, ranked within the pool
`limit=10`	leaderboard	At most 10 rows (default 50, maximum 200)
`round=<round_id>`	entrants	Another round than the live one; take the `round_id` from the rounds feed

For example, the leaderboard of Pool B, at most 10 rows, as CSV:

```
https://www.nezabazipunjab.com/api/live/vmix/leaderboard?pool=B&limit=10&format=csv
```

SETTING UP

Data Sources in vMix, and rehearsal

Adding a feed in vMix

1. **Settings › Data Sources › Add › JSON** (or **CSV** if you used `?format=csv`).
2. Paste the address and set the refresh to every **1–2 seconds**. The website caches each feed for one second, so refreshing faster gains nothing.
3. In the **GT Title Designer**, bind each text field to a column.
4. For the feeds with many rows (leaderboard, entrants, rounds), use the Data Source row controls on the title input to step through the rows.

Rehearsal with ?sample=1

The live feeds stay empty until event day. Add `?sample=1` to any feed to build and test titles now. Sample data never touches the live database and is the same on every refresh. It holds two rounds:

- a Single **Qualification** round, live, in Pools A and B: Pool A has finished, Pool B is on its second pass with a rider on course, and the message reads "Sample data for rehearsal — not real results";
- a completed **Section 1** round with two teams of four riders.

The rounds feed lists both. For the Section round's entrants, with their four riders in `members`, use this address:

```
https://www.nezabazipunjab.com/api/live/vmix/entrants?sample=1
&round=5a3b1e00-0000-4000-8000-000000000002
```

Every sample row has `sample` = `Yes`; live rows have `No`.

Moving rehearsal with ?sample=solo

`?sample=1` never changes, so it cannot show how your titles behave when results come in. Add `?sample=solo` instead, to any feed, and while the organisers have the rehearsal feed running the feeds play a **scripted solo qualification on a loop**, one step every **8 seconds**, about four minutes per loop:

1. Pool A is called (`display_mode` = `pool_call`). Calling a pool puts nobody on course: its first rider comes on course only when the judge taps Start, as on the day.
2. Results come in one by one. A carry skips that rider's later attempts, as on the day, and the standings re-rank.
3. A result is recorded wrongly and then changed, and a short break shows a message.
4. Pool A finishes and the screens switch to the standings, then Pool B is called.
5. In Pool B, a result is recorded and then undone, which puts that rider back on course, and one run is skipped.
6. The qualification finishes: standings, a closing message, a blank screen, and the loop starts again.

It follows the same rules as real scoring and uses the same columns, options and timing (a 1–2 second refresh). The only difference is that nobody is scoring: the steps come from a script, at a steady pace. Real judging has pauses and bursts.

- Between riders `rider_name` in the current feed is empty (a result leaves the course empty until the judge taps Start for the next rider), so titles must handle a blank name.
- Every viewer sees the same moment of the loop, with real times in `last_scored_at` and `updated_at`.
- Every row still has `sample` = `Yes`. Nothing is read from or written to the live database.
- Section 1 stays complete, as in `?sample=1`.

Ask us to start it. The organisers start and stop the rehearsal feed from the website. While it is stopped, `?sample=solo` answers exactly like `?sample=1`: frozen, and still marked `sample` = `Yes`. To check whether it is running, open `https://www.nezabazipunjab.com/overlay` and look for "Moving sample right now", or open a `?sample=solo` address twice, ten seconds apart: if it is running, the answers differ. A start or stop reaches the feeds within a second or two.

Bind a "SAMPLE" badge to the `sample` column, so rehearsal data can never go to air unnoticed. **Remove `?sample=1` and `?sample=solo` from every Data Source before the event.**

Rehearsing with the judges: ?sample=demo

`?sample=solo` follows a script. When the organisers hold a rehearsal with the judges and commentators, add `?sample=demo` instead, to any feed, and the feeds follow **the organisers' shared demo**: the one practice session every judge, commentator and administrator sees on their own device. Every result a judge records, every pool they call, every result they change or undo shows on the feeds within a couple of seconds, so you can test titles against exactly what is happening in the rehearsal.

```
https://www.nezabazipunjab.com/api/live/vmix/current?sample=demo
```

- **Always on.** There is no switch: the demo is never real data. Before anyone has practised, it shows the top of a qualification with nobody ridden yet.
- **Invented riders.** The demo uses the same 30 invented riders as the judges' practice, in Pools A, B and C. Nothing in it is a real result.
- **Every row has `sample` = `Yes`**, exactly like `?sample=1` and `?sample=solo`.
- The public scoreboard and the ready-made overlays follow the demo too: add `?sample=demo` to `https://www.nezabazipunjab.com/live` or to any `/overlay/...` address.
- When the organisers reset the practice, the demo starts again from the top for everyone, and the feeds show that too.

Remove `?sample=demo` from every Data Source before the event, with the other two. The organisers also **close the demo on event day**: a closed demo address shows the frozen sample rows (the same as `?sample=1`), marked SAMPLE, never anything live.

SCREENS

What the organisers want on screen

What to show: display_mode

The organisers choose what the screens show (calling a pool switches to the call-up until the first result), and the current feed reports it in `display_mode`. The feeds themselves are never filtered, so honouring it is up to your titles:

`display_mode`	**Meaning**
`scoreboard`	Normal: the rider on course, results, standings
`leaderboard`	Standings take the screen; hide the rider graphics
`rider`	The rider on course alone; hide the standings
`pool_call`	A pool is being called to the start ("Pool B — get ready"): show that pool's riders, e.g. from the entrants feed by `pool_label`. The first result switches back to `scoreboard`
`message`	Show only the `message` text
`blank`	Hide every graphic (breaks, ceremonies)

The ready-made overlays (see Extras) follow `display_mode` by themselves.

The announcement: message

`message` can be set in any mode: up to 200 characters of announcement text.

COLUMNS

What every column means

Every row has all of its feed's columns, in the order below, and ends with `sample`.

Current — one row

Column	Meaning
`round_name`	Name of the live round, e.g. "Qualification"
`event_type`	`single` (one rider) or `section` (teams of four)
`round_number`	0 for the qualification, then 1, 2, …
`pool_label`	The pool called to the start — normally the one riding now
`next_pool_label`	The pool after it; empty after the last pool
`rider_name`	Rider on course; empty when nobody is
`team_name`	Their team (Section only)
`horse_name`	Their horse
`location_short`	District and state, e.g. "Jalandhar, Punjab"
`attempt_number`	This rider's attempt in the round
`attempts_per_rider`	3 in the qualification, otherwise 1
`run_order`	Position of this run in the start list
`runs_total`	Number of runs in the round's start list
`display_mode`	What the organisers want on screen (see Screens)
`message`	Announcement text, when one is set
`last_rider_name`	Rider of the most recent result
`last_team_name`	Their team
`last_result`	`Carried`, `Struck` or `Miss`
`last_points`	4, 2 or 0
`last_scored_at`	Time of that result (ISO 8601, UTC; Amritsar is UTC+5:30)
`updated_at`	When the live position last changed (ISO 8601, UTC)
`photo`	Photo of the rider on course, as a file name, e.g. `Harpreet Singh.png`; empty without a photo (see Photos)
`photo_url`	Web address of that photo: bind the title's image to it
`last_photo`	The same, for the rider of the most recent result
`last_photo_url`	Web address of that photo
`sample`	`Yes` for rehearsal data, `No` for live data

Leaderboard — one row per entrant, ranked

Column	Meaning
`rank`	Rank in the whole round
`pool_rank`	Rank within the pool
`pool_label`	The entrant's pool
`name`	Rider (Single) or team (Section)
`team_name`	Team name (Section)
`horse_name`	Horse (Single only)
`location_short`	District and state
`points`	Single: best run. Section: the four riders' runs added up
`best_result`	`Carried`, `Struck` or `Miss`
`runs_scored`	Runs with a result
`runs_total`	Runs to ride, not counting skipped ones
`advanced`	`Yes` (through), `No` (out), or empty while undecided
`photo`	Single: the rider's photo as a file name; empty for Section and without a photo
`photo_url`	Web address of that photo
`sample`	`Yes` for rehearsal data, `No` for live data

Entrants — one row per entrant, in start order

Column	Meaning
`entrant_key`	Stable id of the rider or team in this event
`pool_label`	Their pool
`start_position`	Start-list position of their first run (rows are in this order)
`name`	Rider (Single) or team (Section)
`team_name`	Team name (Section)
`horse_name`	Horse (Single only)
`location_short`	District and state
`members`	Section: the four riders in riding order, separated by `;`
`runs_total`	Runs to ride, not counting skipped ones
`runs_scored`	Runs with a result
`points`	Points so far
`best_result`	`Carried`, `Struck` or `Miss`
`advanced`	`Yes`, `No`, or empty while undecided
`rank`	Rank in the round
`pool_rank`	Rank within the pool

Column	Meaning
`photo`	Single: the rider's photo as a file name; empty for Section and without a photo
`photo_url`	Web address of that photo
`sample`	`Yes` for rehearsal data, `No` for live data

Rounds — one row per round, in running order

Column	Meaning
`round_id`	The id that `entrants?round=` takes
`name`	Round name
`event_type`	`single` or `section`
`round_number`	0, 1, 2, …
`status`	`upcoming`, `live` or `complete`
`is_live`	`Yes` for the round being ridden now
`attempts_per_rider`	3 in the qualification, otherwise 1
`target_points`	Section: points a team needs to go through (8, 12, 16); 0 for Single
`pool_size`	Planned entrants per pool; 0 when the round has no pools
`pool_count`	Pools drawn
`entrants`	Riders (Single) or teams (Section) in the start list
`runs_total`	Runs to ride, not counting skipped ones
`runs_scored`	Runs with a result
`sample`	`Yes` for rehearsal data, `No` for live data

PHOTOS

Rider pictures for your titles

The public feeds now carry each rider's photo. No key is needed. Current, leaderboard and entrants have a `photo` column and a `photo_url` column (current also `last_photo` and `last_photo_url`, for the rider of the most recent result), just before `sample`. Riders' photos are optional, and are given to you for the broadcast only.

> **Bind the title's image to `photo_url`.** For example, `https://www.nezabazipunjab.com/api/live/vmix/photo/Harpreet%20Singh.png`. The first time a picture is asked for it is fetched from the website; after that it comes from a cache and is quick.

- **File names are `<rider name>.png`**, the name as the feed shows it, without characters a file name cannot hold. When two riders share a name, **a short code is added** to each of them, e.g. `Harpreet Singh 1a2b.png`, so two riders never share a picture.
- The pictures are **PNG images with the background removed** (transparent). A photo added very recently may show with its background for a short while, until its cut-out has been made.
- A rider with no photo has **empty photo columns**, so give each title a default picture for when the column is empty. Section rows (teams) have empty photo columns too.
- Sample rows (`sample=…`) carry one placeholder picture for every invented rider, named `sample-rider.png`.

Optional: the keyed photo feeds and the ZIP

For pictures stored on the vMix computer (they show at once and keep working if the venue internet drops), the organisers can give you a **key** privately. Never show it on screen, in a title or in a screenshot, and never pass it on.

Feed	Address
Current, with photos	`https://www.nezabazipunjab.com/api/broadcast/current?key=YOUR_KEY`
Entrants, with photos	`https://www.nezabazipunjab.com/api/broadcast/entrants?key=YOUR_KEY`
Every rider's photo	`https://www.nezabazipunjab.com/api/broadcast/photos?key=YOUR_KEY`
All photos as a ZIP	`https://www.nezabazipunjab.com/api/broadcast/photos/zip?key=YOUR_KEY`

These send the public rows with their own photo columns instead of `photo` and `photo_url`: `photo_url`, `photo_file` (the file name in the ZIP, e.g. `harpreet-singh-1a2b3c4d.jpg`) and `photo_path`, the same three as `last_…` in current, and `member_1_photo_url` … `member_4_photo_url` for a Section row in entrants. The photos feed has one row per registered rider.

Download the ZIP, unzip it into a folder on the vMix computer, and add that folder to the keyed address with `&photo_dir=`, typed exactly as the folder is named, e.g. `&photo_dir=D:\Photos`. `photo_path` then reads `D:\Photos\harpreet-singh-1a2b3c4d.jpg`: bind the title's image to it. Download the ZIP again after check-in closes and unzip it over the same folder. A photo that could not be downloaded is named in `missing.txt` inside the ZIP.

> **Not yet tested on a real vMix.** Binding a title's image to a Data Source column, by web address or by file path, **has not been tested with a real vMix**. This page describes vMix's image binding as we understand it. Please try it with `sample=1` well before event day and tell us anything that does not behave as described.

EXTRAS

The bridge script and ready-made overlays

Both are optional: the Data Sources above are all a title needs.

Optional: the bridge script

If you would rather have values pushed into an existing title than bind Data Source columns, there is a small script that reads the current feed every second and sends each changed value into a vMix title through vMix's own local API (`SetText`). It needs Node.js 24 on the computer that runs it, with no other installation; ask us for the file (`vmix-bridge.mjs`). Run it on the vMix computer, for example:

```
node vmix-bridge.mjs --input "Scorebug" --only rider_name,team_name,last_result --map rider_name=Name
```

- That sends `rider_name` to the title field `Name`, and so on.
- `--sample` uses the rehearsal data, `--moving-sample` the moving rehearsal data, and `--dry-run --once` prints what it would send without touching vMix.
- It retries by itself when the network or vMix drops, and sends everything again when vMix comes back.
- `--help` lists every option.
- It handles the one-row current feed only.

Optional: ready-made overlays


If you prefer finished graphics in the website's style, five transparent overlay pages can be added as vMix **Web Browser** inputs (1920×1080, on an overlay channel, one input per overlay). They follow `display_mode` by themselves.

Overlay	Address
Scorebug	`https://www.nezabazipunjab.com/overlay/scorebug`
Lower third	`https://www.nezabazipunjab.com/overlay/lower-third`
Leaderboard	`https://www.nezabazipunjab.com/overlay/leaderboard`, with `?pool=A` to pin one pool or `?all=1` for the whole round
Ticker	`https://www.nezabazipunjab.com/overlay/ticker`
Pool call-up	`https://www.nezabazipunjab.com/overlay/pool-call`

The setup page, with the steps for vMix and other software, is `https://www.nezabazipunjab.com/overlay`.



Lower third

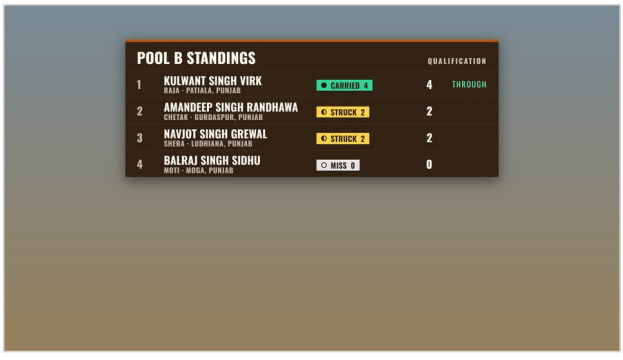

Pool standings

TROUBLESHOOTING

And what has not been tested yet

What you see	What it means, and what to do
One row of empty values	Live scoring is not set up yet, no round is live, or the `pool=` / `round=` you asked for does not exist. Try the same address with `?sample=1` to check your bindings.
Old values	Check the Data Source's refresh interval in the Data Sources manager. For a Web Browser input, right-click it and choose **Reload**. Then open the feed address in an ordinary browser to see what it says now.
HTTP 503	A temporary server problem. vMix keeps the last good values and picks up the next good answer by itself at the next refresh.
HTTP 404	The address is mistyped (or the website update that publishes the feeds is not live yet — ask us).
The SAMPLE badge shows	That Data Source still has `?sample=1`, `?sample=solo` or `?sample=demo` on its address: its rows are rehearsal data. Remove it.
`?sample=solo` does not move	The rehearsal feed is stopped. It answers like `?sample=1` until the organisers start it.
`?sample=demo` does not move	Nobody is practising right now. It follows the judges' practice and only changes when they record something.

What has not been tested yet

> The feeds are new and **have not yet been tested with a real vMix**. The vMix steps in this guide (menu names, the row controls) describe vMix's Data Source feature as we understand it, not something we have tried on your machines. The bridge script has been tested only against a stand-in for vMix, never a real one. Please do a rehearsal with `?sample=1` well before event day and tell us anything that does not behave as described.

EVENT DAY

The checklist before you go on air

Go through this on the vMix computer before the first pool is called.

1. Every Data Source refreshes every **1–2 seconds** (check in the Data Sources manager).
2. `?sample=1`, `?sample=solo` and `?sample=demo` are gone from every Data Source address (close the demo on event day; a closed demo address shows frozen sample rows marked SAMPLE), and `--sample` and `--moving-sample` from the bridge script if you run it.
3. Every title has its **SAMPLE** badge bound to the `sample` column, and no badge is showing.
4. Your titles honour `display_mode` (see Screens), or you use the ready-made overlays, which follow it by themselves.
5. Every title with a picture has its image bound to `photo_url` (or `last_photo_url`) and a default picture for riders without one. If you use the keyed feeds instead, the ZIP was downloaded again **after check-in closed**, and no address showing on screen carries the key (see Photos).

6. The current feed, `https://www.nezabazipunjab.com/api/live/vmix/current`, opened in an ordinary browser, shows `"sample":"No"`. `"sample":"Yes"` means `?sample=1`, `?sample=solo` or `?sample=demo` is still on the address.
7. You know whom to contact: on the day, the head organiser at the scoring laptop; before the day, nezabaazipunjab@gmail.com.

Contact

Questions, or anything that does not behave as this guide says: nezabaazipunjab@gmail.com