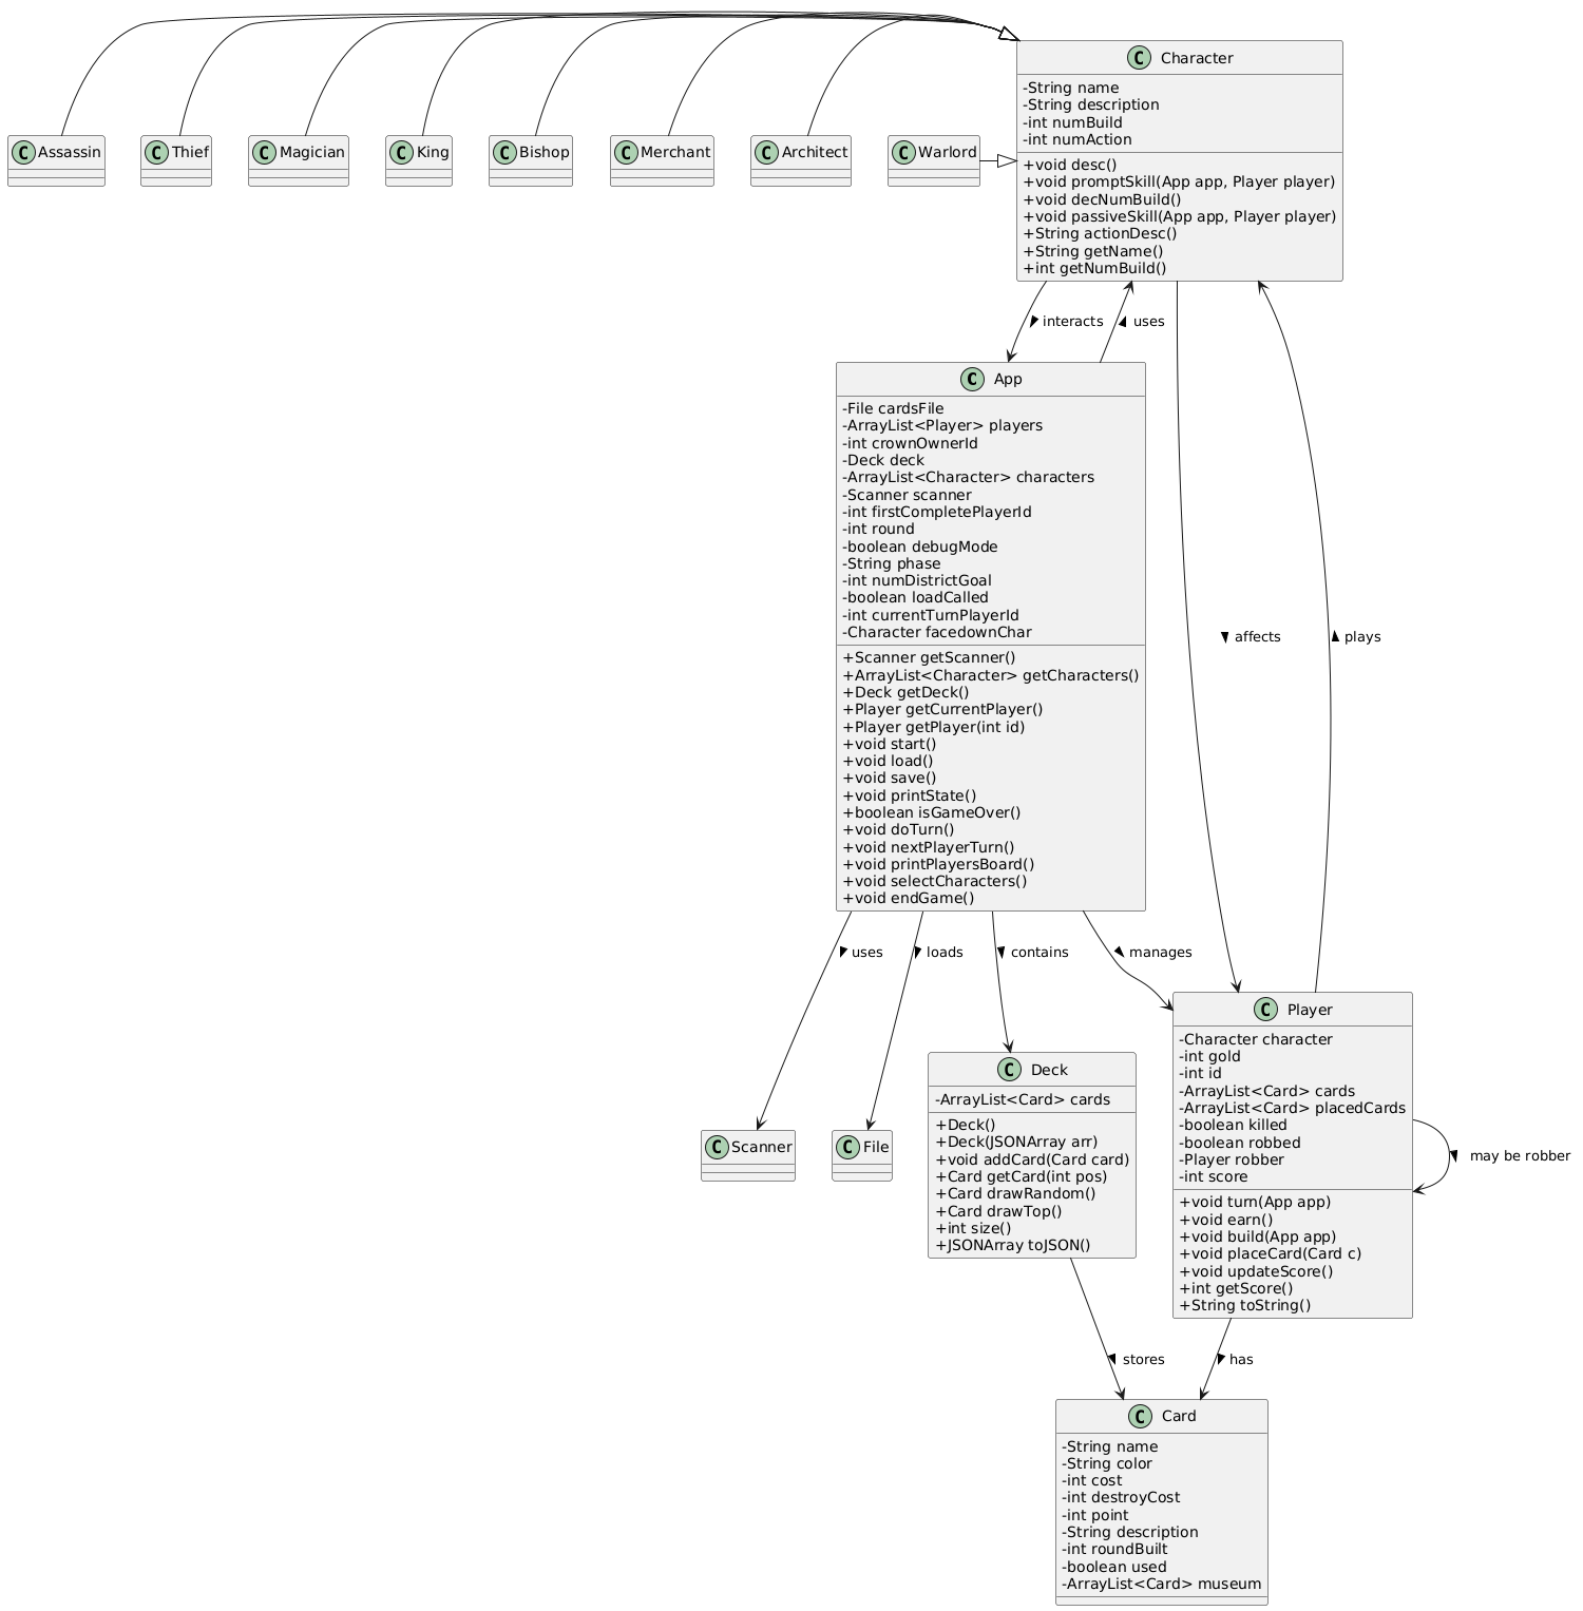

Assassin
Thief
Magician
King
Bishop
Merchant
Architect
Warlord
Character
-String name
-String description
-int numBuild
-int numAction
+void desc()
+void promptSkill(App app, Player player)
+void decNumBuild()
+void passiveSkill(App app, Player player)
+String actionDesc()
+String getName()
+int getNumBuild()
interacts
uses
App
-File cardsFile
-ArrayList<Player> players
-int crownOwnerId
-Deck deck
-ArrayList<Character> characters
-Scanner scanner
-int firstCompletePlayerId
-int round
-boolean debugMode
-String phase
-int numDistrictGoal
-boolean loadCalled
-int currentTurnPlayerId
-Character facedownChar
+Scanner getScanner()
+ArrayList<Character> getCharacters()
+Deck getDeck()
+Player getCurrentPlayer()
+Player getPlayer(int id)
+void start()
+void load()
+void save()
+void printState()
+boolean isGameOver()
+void doTurn()
+void nextPlayerTurn()
+void printPlayersBoard()
+void selectCharacters()
+void endGame()
affects
plays
uses
loads
contains
manages
Scanner
File
Deck
-ArrayList<Card> cards
+Deck()
+Deck(JSONArray arr)
+void addCard(Card card)
+Card getCard(int pos)
+Card drawRandom()
+Card drawTop()
+int size()
+JSONArray toJSON()
Player
-Character character
-int gold
-int id
-ArrayList<Card> cards
-ArrayList<Card> placedCards
-boolean killed
-boolean robbed
-Player robber
-int score
+void turn(App app)
+void earn()
+void build(App app)
+void placeCard(Card c)
+void updateScore()
+int getScore()
+String toString()
may be robber
stores
has
Card
-String name
-String color
-int cost
-int destroyCost
-int point
-String description
-int roundBuilt
-boolean used
-ArrayList<Card> museum