

## Lab 10 – jQuery Lab

### Aims:

- ☐ To practice how to use a JavaScript framework such as jQuery to enhance user interaction.
- ☐ To review JavaScript functions and control structure.

### Task 1: Create Form Validation using jQuery library

#### Description:

This lab is to demonstrate the use of jQuery.

Part 1: Based on a registration form, implement the JavaScript functions for client-side form data validation using jQuery.

Part 2: Create a section collapse effect for the Account Information and User Information sections of the registration form.

Part 3: Modify the validation function to use an HTML+CSS pop window (similar to Lab 8).

A simple preview of the web page to implement in this lab is presented in Figure 2 on page 6.

[Note: A gif file named objective.gif that presents what to achieve in this lab can be found in lab\\_10\\_files.zip which is available on Zalo Group.](#)

Design:

The design process starts with discussion and paper drawings. Ensure this process is completed before implementation.

#### Step 1: Form Creation and Presentation (HTML and CSS)

The design presented in Figure 1 will be used.

- 1.1 Add a “[−]” symbol beside each input section for the user to click to collapse the section. Once a section is collapsed, it should display [+] to expand the input section.

**Registration Form**

**[-]Section A**  
--Account Information -----

User ID

Password

Re-type Password

**[-]Section B**  
-- User Information -----

Name

Gender ☐ Male ☐ Female

**Test Register**

Figure 1. Form Mock Up

## Step 2: JavaScript Implementation

2.1 Identify which what form data should be evaluated and what rules should apply.

Answer: We need to evaluate all input fields. The rules are:

Rule 1: All input fields must not be empty;

Rule 2: User ID must be a valid email address. Thus it must contain a '@' symbol;

Rule 3: Password and Retype Password must have the same value; and

Rule 4: Name must be letters and spaces only.

## Implementation

Implementation requires the creation of HTML, CSS and JavaScript files. In this lab, we will use the HTML and CSS files created in Lab 8. Those files are available in lab\_10\_files.zip on Zalo Group.

## Step 3: Directory Set Up

3.1 Create a new folder 'lab10' in Google Drive.

## Step 4: HTML Creation

4.1 Using NotePad++ (or SubLime Text for Mac users), open file regform2.html.

4.2 Review the HTML code and locate comments #1 - #6 and add missing HTML code as required.

For your convenience, the basic code and additional code is shown below:

```
<!DOCTYPE html>
<html lang="en">
<head>
  <meta charset="utf-8" />
  <meta name="description" content="Web development" />
  <meta name="keywords" content="Registration Form" />
  <meta name="author" content="put your name here" />
  (1)link to desktop CSS file
  (2)link to modal CSS file for Task 3
  (3)link to validation jQuery file
  (4)link to validation JavaScript file
  <title>Web Development Registration Form</title>
</head>
<body>
  <form id="regform" method="post"
    action="http://...../formtest.php">
    (5) add the [-]/[+] collapse/expand content
    <fieldset>
      <legend>Account Information</legend>
      <div class="textinput">
        <label for="sid">User ID</label>
```

```

        <input id="sid" type="text" name="sid" />
    </div>
    <div class="textinput">
        <label for="pwd1">Password</label>
        <input id="pwd1" type="password" name="pwd1" />
    </div>
    <div class="textinput">
        <label for="pwd2">Retype Password</label>
        <input id="pwd2" type="password" name="pwd2" />
    </div>
</fieldset>
(6) add the [-]/[+] collapse/expand content
<fieldset>
    <legend>User Information</legend>
    <div class="textinput">
        <label for="uname">Name</label>
        <input id="uname" type="text" name="uname" />
    </div>
    <div class="radioinput">
        <fieldset>
            <legend>Gender</legend>
            <input id="genm" type="radio" name="gender" value="M" />
            <label for="genm">Male</label>
            <input id="genf" type="radio" name="gender" value="F" />
            <label for="genf">Female</label>
        </fieldset>
    </div>
</fieldset>
</div>
</fieldset>
<div class="buttoninput">
    <input type="submit" value="Test Registration Form" />
</div>
</form>
</body>
</html>

```

## Discussion

1. link to desktop CSS file

Answer:     <link href="\_\_\_\_\_" rel="\_\_\_\_\_"  
                   type="\_\_\_\_\_" media="screen and (min-device-width:481px)" />

2. link to modal CSS file

Answer: `<link href="_____ " rel="_____ "  
type="_____ " />`

3. link to jQuery library

Answer: `<script src="_____ "></script>`

4. link to validation window JavaScript file

Answer: `<script src="_____ "></script>`

5. write the [-]/[+] collapse/expand content for Account Information

Answer: `<div><a class="collapse" href="#">[-]</a>  
<span>Section A</span></div>`

6. write the [-]/[+] collapse/expand content for User Information

Answer: `<div><a class="collapse" href="#">[-]</a>  
<span>Section B</span></div>`

### Discussion:

Numbers 5 and 6 above have the same answer apart from the section text. Attribute class is used instead of attribute id, as both “buttons” will allow similar user interaction which is to collapse the input section that follows it. The interaction will start with [-] as the form by default will be in expanded mode, and the user can click to collapse it. The [+] will be replaced dynamically with JavaScript using jQuery.

[Extension: Try to make the two buttons look prettier using CSS.]

### Step 5: CSS Creation

5.1 Open files regform2\_desktop.css and modal.css. Review the CSS code, no changes will be made to these files in this lab.

### Step 6: Form Data Validation Using jQuery

6.1 Open file validation.js, convert the existing code to use jQuery as shown below.

Note: Replace ‘~~struck-out~~’ code with the **red** code shown below

`/* function validate() will validate form data */`

`function validate() {`

`var sid = document.getElementById("sid").value; $("#sid").val();`

`var pwd1 = document.getElementById("pwd1").value; $("#pwd1").val();`

`var pwd2 = document.getElementById("pwd2").value; $("#pwd2").val();`

`var uname = document.getElementById("uname").value; $("#uname").val();`

`var genm = document.getElementById("genm").checked; $("#genm").prop("checked");`

`var genf = document.getElementById("genf").checked; $("#genf").prop("checked");`

`var errMsg = ""; /* create variable to store the error message */`

`var result = true; /* assumes no errors */`

`var pattern = /^[a-zA-Z ]+$/; /* regular expression for letters and spaces only */`

`/* Rule 1, check if all required data are entered */`

`if (sid == "") { //check whether User ID is empty`

```

        errMsg += "User ID cannot be empty.\n";
    }
    if (pwd1 == "") { //check whether Password is empty
        errMsg += "Password cannot be empty.\n";
    }
    if (pwd2 == "") { //check whether re-typed Password is empty
        errMsg += "Retype password cannot be empty.\n";
    }
    if (uname == "") { //check whether User Name is empty
        errMsg += "User name cannot be empty.\n";
    }
    if (((genm == "") && (genf == "")) { ((!genm) && (!genf))
        errMsg += "A gender must be selected.\n"; //check whether gender is selected
    }
    /* Rule 2, check if the user ID contains an @ symbol */
    if (sid.indexOf('@') == 0 ) {
        errMsg += "User ID cannot start with an @ symbol.\n";
    }
    if (sid.indexOf('@') < 0 ) {
        errMsg += "User ID must contain an @ symbol.\n";
    }
    /* Rule 3, check if password and retype password are the same */
    if (pwd1 != pwd2) {
        errMsg += "Passwords do not match.\n";
    }
    /* Rule 4, check if user name contains only letters and spaces */
    if (!uname.match(pattern)) {
        errMsg += "User name contains symbols.\n";
    }
    /* Display error message any error(s) is/are detected */
    if (errMsg != "") {
        alert (errMsg);
        result = false;
    }
    return result;
}

/* link HTML elements to corresponding event function */
function init () {
    /* assign the <form> element to variable regForm */
    var regForm = document.getElementById("regform");

```

```

    /* link function validate() to the onsubmit event of the form */
    regForm.onsubmit=validate;                                $("#regform").submit(validate);
}
/* execute function init() once the window is loaded*/
window.onload=init;                                         $(document).ready(init);

```

## Step 7: Collapse/Expand Effect Using jQuery

7.1 Open file validation.js, add the following function and code shown below.

Answer: Add the following function toggle () and event link code

```

/* write the function toggle() that collapse/expand a section*/
function toggle (){
    $(this).parent().next().slideToggle();                    /* see explanation (7) below */
    if ($(this).html() == "[-]"){                               /* Update the symbol on the "button" */
        $(this).html("[+]");
    } else { /* [-] <-> [+] */
        $(this).html("[-]");
    }
}
}
/* link HTML elements to corresponding event function */
function init() {
    $(".collapse").click(toggle); //link function toggle() to appropriate events
    $("#regform").submit(validate);/*link function validate() to the submit event of the
form */
}

```

This selects all  
elements in  
class

7. `$(this).parent().next().slideToggle();`

Answer: `$(this)` gets access to the element that triggered function `toggle()`, which is the `[-]/[+]` “button” created using an `<a>` element (see Step 4.2 Discussion #5 and #6). Then, function `parent()` is used to find the parent element of the `[-]/[+]` “button”, i.e., the `<div>` element that encloses the `<a>` element (see HTML presented in Step 4.2). After that, function `next()` is used to find the sibling element of the `<div>` element, i.e., the `<fieldset>` element. Finally, jQuery function `slideToggle()` is called implement the collapse/expand effect for the selected `<fieldset>` element.

## Step 8: HTML+CSS Pop Window

8.1 Open the text file validation.js, modify variable `errMsg` and revise the code of function `validate()` as shown below.

8.2 This time, we first present each error as an `<li>` element. Later on, all those `<li>` elements will be placed in a `<ul>` element as an unordered list (see Step 8.3 below).

```

if (sid == "") { //check whether User ID is empty
    errMsg += "<li>User ID cannot be empty.</li>";
}
if (pwd1 == "") { //check whether Password is empty
    errMsg += "<li>Password cannot be empty.</li>";
}
if (pwd2 == "") { //check whether re-typed Password is empty
    errMsg += "<li>Retype password cannot be empty.</li>";
}
if (uname == "") { //check whether User Name is empty
    errMsg += "<li>User name cannot be empty.</li>";
}
if ((!genm)&&(!genf)) { //check whether gender is selected
    errMsg += "<li>A gender must be selected.</li>";
}
/* Rule 2, check if the user ID contains an @ symbol */
if (sid.indexOf('@') == 0 ) {
    errMsg += "<li>User ID cannot start with an @ symbol.</li>";
}
if (sid.indexOf('@') < 0 ) {
    errMsg += "<li>User ID must contain an @ symbol.</li>";
}
/* Rule 3, check if password and retype password are the same */
if (pwd1 != pwd2) {
    errMsg += "<li>Passwords do not match.</li>";
}
/* Rule 4, check if user name contains only letters and spaces */
if (!uname.match (pattern)) {
    errMsg += "<li>User name contains symbols.</li>";
}

```

8.3 Create an HTML <div> element to cover the entire web page when the error message displayed (see Figure 2 below).

8.4 Place the error message into an unordered list and place the list in a section with a 'Close' button (see Figure 2 below).

8.5 Count the number of error, and store the value in variable numOfItems.

8.6 Add the error message HTML element immediately after the body element.


8.7 Make the screen overlay visible.

8.8 Adjust the window height and centre accordingly.

8.9 Make the pop up window visible.

8.10 Add a click event to disappear the screen overlay and pop up window.

```
/* Display error message if any error(s) is/are detected */
if (errMsg != "") {
    errMsg = "<div id='scrnOverlay'></div>" //8.3
        + "<section id='errWin' class='window'><ul>"
        + errMsg //8.4
        + "</ul><a href='#' id='errBtn' class='button'>Close</a></section>";
    var numOfItems = ((errMsg.match(/<li>/g)).length) + 6; //8.5
    $("body").after(errMsg); //8.6
    $("#scrnOverlay").css('visibility', 'visible'); //8.7
    $("#errWin").css('height', numOfItems.toString() + 'em'); //8.8
    $("#errWin").css('margin-top', (numOfItems/-2).toString() + 'em'); //8.8
    $("#errWin").show(); //8.9
    $("#errBtn").click (function () { //8.10
        $("#scrnOverlay").remove();
        $("#errWin").remove();
    });
    result = false;
}
```

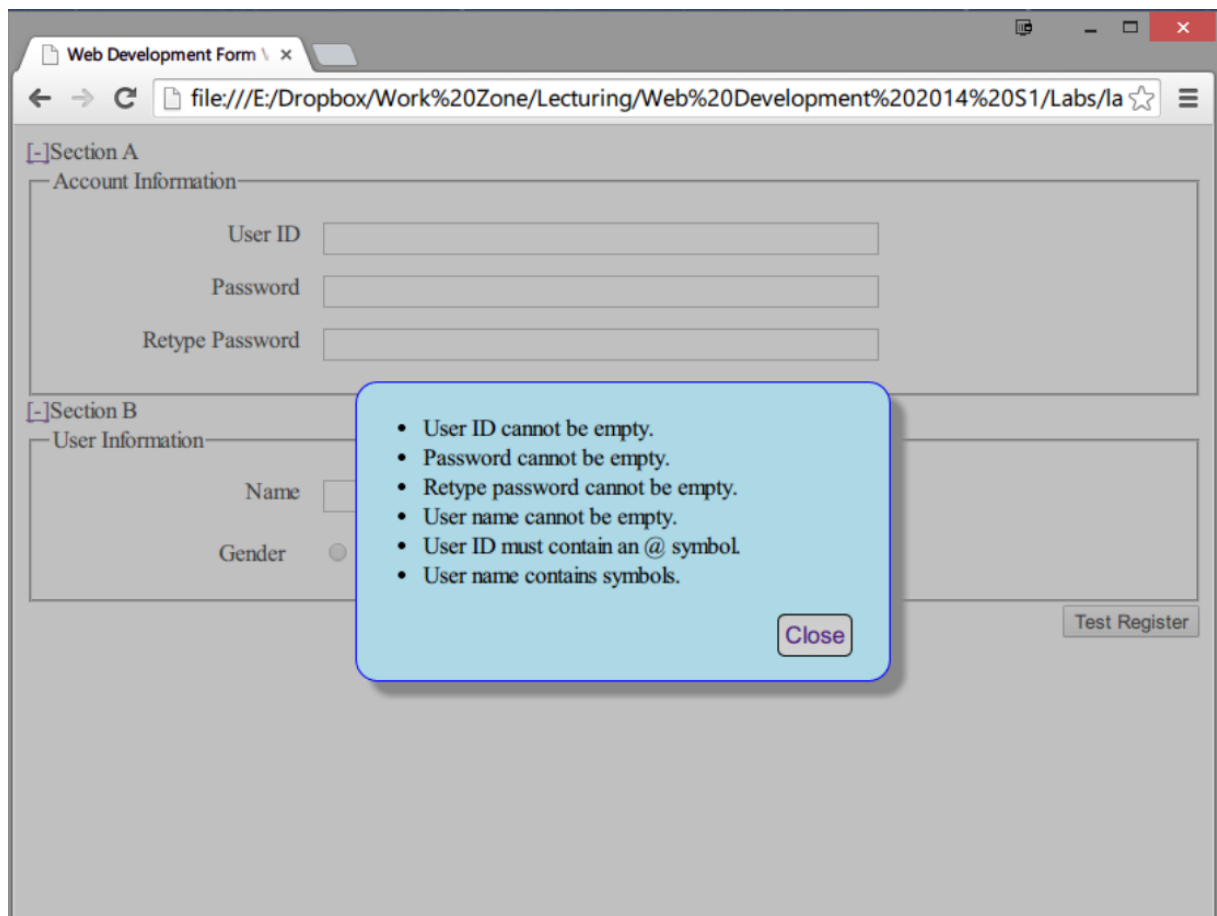

**Figure 2. Error Message Displayed as a List in a Pop Up Window**



## Testing and Quality Assurance

Test your code for errors, this process is also referred to as debugging. Use the Error Console provided by the Web Developer Firefox add-on. It can be accessed from the Web Developer toolbar: “Tools”->”Error Console”.

If there are errors, check if you missed any steps above.

**[IMPORTANT]** The Error Console provided by the Web Developer Firefox Add-on can help you identify syntax errors quickly. Please refer to the Error Console when your JavaScript does not the way you want them to.

## Step 9. Test and view web pages.

To view the pages through http, use <https://www.driv.tw/>

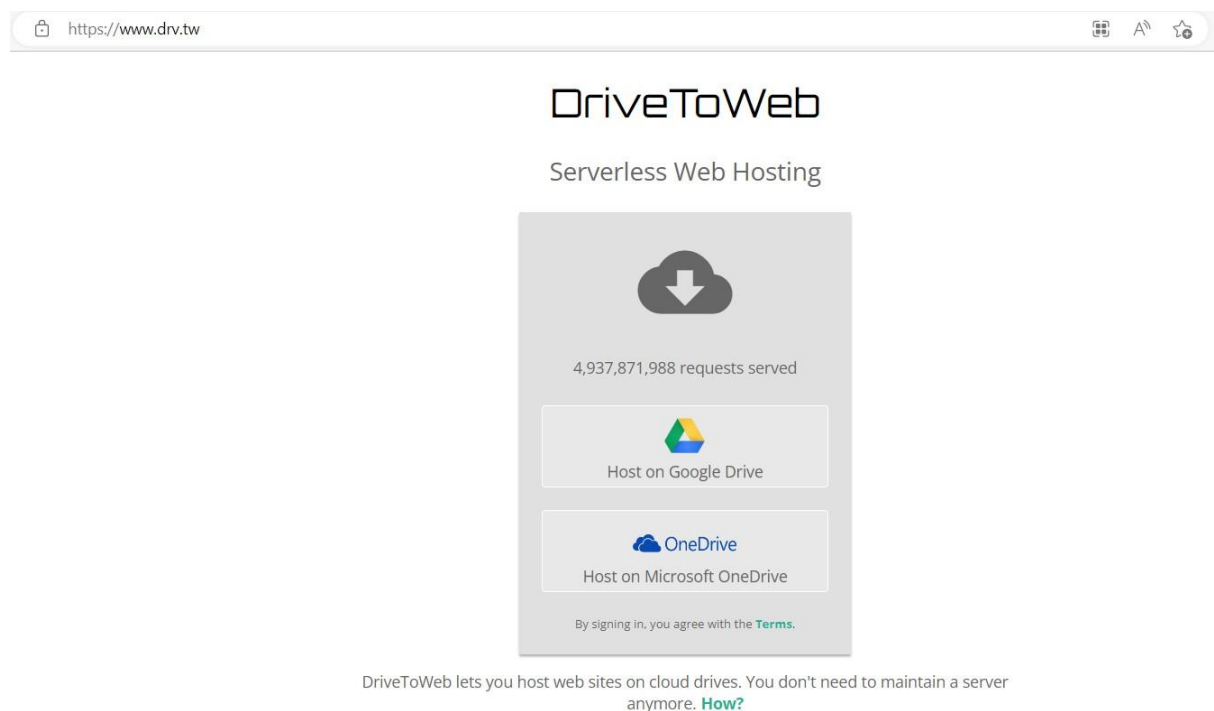


Figure 1. Access Serveless Web Hosting Drive to the Web, Choose Host on Google Drive

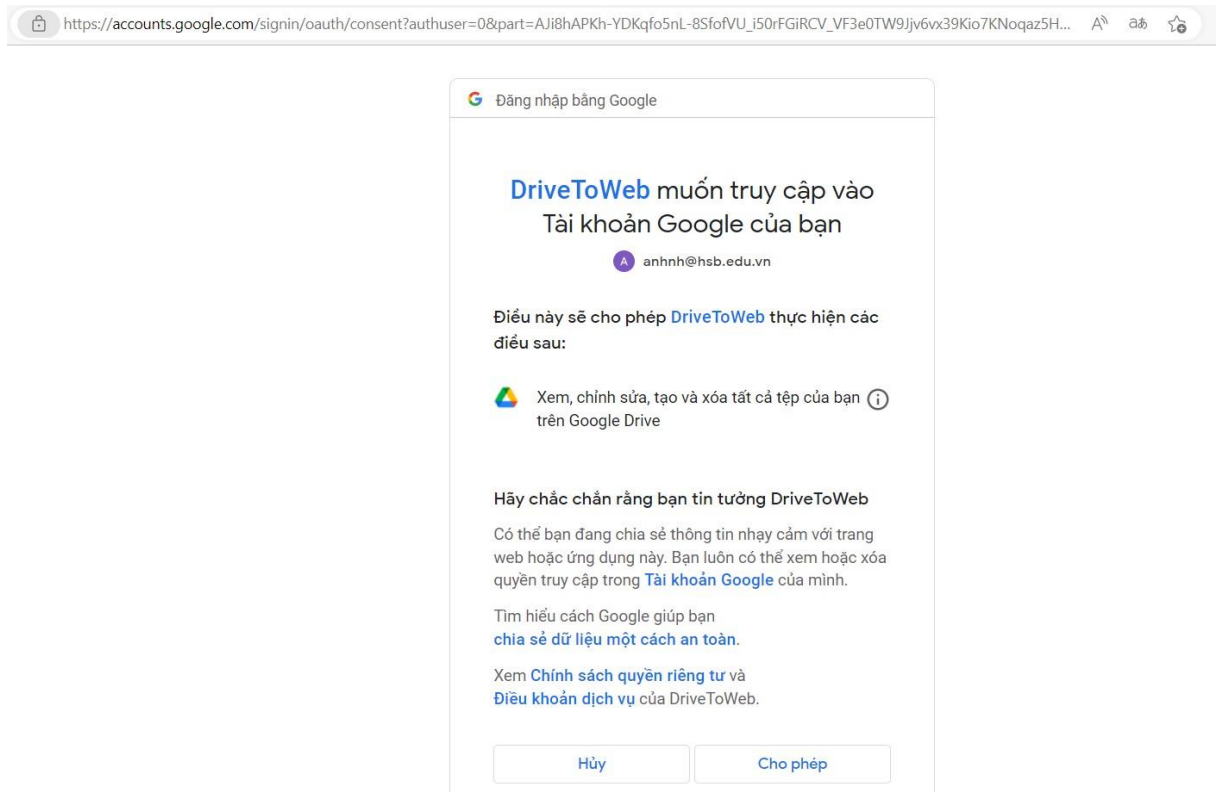


Figure 2. Choose your Google Drive Account for login and click “Yes” or “Cho phép”

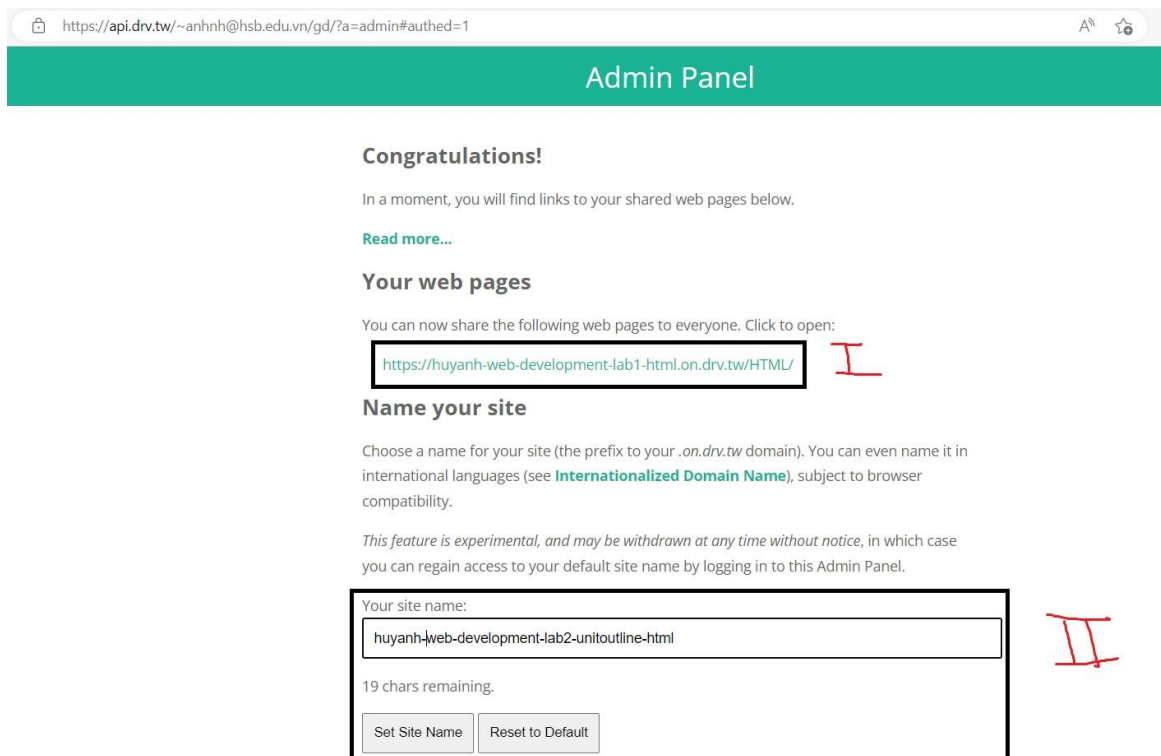


Figure 3. I - Your html file display automatically here as a webpage link II - Change the name of your web link as follow:  
*yourname-web-development-lab(number)-(filename)-html*

## Step 10: HTML and CSS Validation

To validate the HTML file, either add in the Web Developer toolbar and use 'Tools' / 'Validate Local HTML' or use the validator at <http://validator.w3.org> and for webpages pages on the server validate via 'URL'.

To validate the CSS file, either use the Web Developer toolbar and use 'Tools' / 'Validate Local CSS' or use the CSS validator at <http://jigsaw.w3.org/css-validator/> and for CSS on the server validate by 'URL'.

## Task 2: Server Side Includes (SSI)

These simple lab exercises are designed to help you understand the concepts of Server Side Includes (SSI). We start with a simple 'template' webpage, style it, and then remove and save common blocks of code, that are then re-used as "includes".

### Step 1: Creation of Template Webpage

1.1 Open a text editor and create the following simple html5 file, and save it as testpage.html in your test space on drive.

```
<!DOCTYPE html>
<html>
<head>
    <meta name="description" content="Test Page template for SSI" />
    <meta charset="utf-8" />
    <title>Test Page template for SSI </title>
</head>
<body>
<div id='container'>
    <!-- Start Banner -->
    <header id='header'>
        <h2>Banner</h2>
    </header>
    <!-- End Banner -->
    <!-- Start Menu -->
    <nav id='nav'>
        <h2>Menu</h2>
        <ol>
            <li><a href="item1.html">Item 1</a></li>
            <li><a href="item2.html">Item 2</a></li>
            <li><a href="item3.html">Item 3</a></li>
        </ol>
    </nav>
    <!-- End Menu-->
    <!-- Start Main -->
```

Common header in each page – to be made an 'include'.

Common navigator in each page – to be made an 'include'.

```

    <main id='content'>
        <h1>Main page Content</h1>
        <p>This is the main part of the webpage</p>
    </main>
    <!-- End Main -->
    <!-- Start Footer -->
    <footer id="footer">
        <p>Footer text goes here</p>
    </footer>
    <!-- End Footer -->
</div>
</body>
</html>

```

Common footer in each page – to be made an ‘include’.

1.2 View testpage.html in Firefox.

Validate it to ensure that it is all okay.

1.3 Create the following simple stylesheet, save it as style.css and link it to testpage.html.

```

<link rel="stylesheet" type="text/css" href="style.css" />
/* stylesheet for testpage */
body {font-family: Arial, sans-serif}
h1 {color:red;}
div {padding:2px}
#container, #header, #footer {border: 1px solid #f00;}
#nav, #content {display: table-cell;}
#nav {min-width: 8em; border-right: 1px double #00f;}
#nav ol {list-style-type:none;}

```

Note: display:table-cell does not work in IE7

1.4 View testpage.html. Resize the browser window.

The page layout should be ‘fluid’ and reflow with the window. The #nav width has been specified in ‘em’ so that it will re-size dynamically if the browser font size is altered (Ctrl+, Ctrl-, Ctrl0).

1.5 Validate the CSS, to check that it is okay.

## Step 2: Creation of SSI files to be Included

2.1 Resave your testpage.html as testpage.shtml on drive.

The server is set to only look for includes in files with a .shtml extension.

2.2 Cut/copy the header markup and save it in a separate file as header.ssi.

```

<!-- Start Banner -->
<header id='header'>
<h2>Banner</h2>
</header>
<!-- End Banner -->

```

2.3 Cut/copy the menu markup and save it in a separate file as nav.ssi

```

<!-- Start Menu -->
<nav id='nav'>
    <h2>Menu</h2>
    <ol>
        <li><a href="item1.html">Item 1</a></li>
        <li><a href="item2.html">Item 2</a></li>
        <li><a href="item3.html">Item 3</a></li>
    </ol>
</nav>
<!-- End Menu-->

```

Common content in each page – to be made as ‘includes’. File extension could be ‘.txt’ or anything, we use .ssi here.

2.4 Cut/copy the footer markup and save it in a separate file as footer.ssi.

```

<!-- Start Footer -->
<footer id="footer">
    <p>Footer text goes here</p>
</footer>
<!-- End Footer -->

```

2.5 Having removed the header, nav and footer markup from testpage.shtml replace these with

#includes (see below) and then resave the file

```

<!--#include file="header.ssi" -->
<!--#include file="nav.ssi" -->
<!--#include file="footer.ssi" -->

```

Note that there is no space after <!-- ie “<!-- #include ...” will not work

2.6 Make sure that all of the files are in the same directory on the mercury Server.

View testpage.shtml page through the browser using http.

The SSI files should now be ‘included’ before being served.

2.7 Validate the served page by URL to make sure that the served page is valid HTML5.

Notes: Conventions for naming include files vary. Often a .inc extension is used. If an include file contains another include file, then it needs to have an extension that will trigger the server to process the file. Hence the include file might need a .shtml extension if it contained another include.

### Step 3: SSI files with PHP:

3.1 Resave your testpage.shtml as testpage.php on Zalo.

We will now change the include syntax to PHP syntax.

3.2 Change the include statements to PHP as follows:

Change

```
<!--#include file="header.ssi" -->
```

to

```
<?php include("header.ssi"); ?>
```

Change

```
<!--#include file="nav.ssi" -->
```

to

**<?php include("nav.ssi"); ?>**

Change

**<!--#include file="footer.ssi" -->**

to

**<?php include("footer.ssi"); ?>**

3.3 View testpage.php page through the browser using http.

The SSI files should again now be ‘included’ before being served.

3.4 Validate the served page by URL to make sure that the served page is valid HTML5.

3.5 If an include file also contains PHP code, such as a nested include, or a PHP function, then the file needs to have a .php extension. Often a double extension is used, such as smarts.inc.php.