

Assignment 1 - Node Modules, Express, MongoDB and REST API

Instructions

In this assignment you will continue the exploration of Node modules, Express, MongoDB and the REST API.

Assignment Overview

At the end of this assignment, you should have completed the following tasks to update the server:

- Applied MVC pattern
- Created a Node module using Express router to support the routes for quizzes and questions REST API.
- Created mongoose model
- Connected with MongoDB

Assignment Requirements

+ A simple quiz is an interactive application designed to test users' knowledge on a particular topic or subject. It typically consists of a series of questions with multiple-choice options. Users select their answers and at the end of the quiz, the app displays the user's score and often offers a review of the questions and their correct answers.

+ Build your backend project that manages quiz and questions for a simple quiz app. The app allows users to implement the REST API (GET, POST, PUT, DELETE) endpoints /quizzes, / quizzes/:quizId and /question, /question/:questionId to interact with the MongoDB database namely SimpleQuiz.

+ Student can write the code based on the specific tasks

1. Create the schemas basing on the all requirements as below

Quiz: Represents a quiz or a test.

- Object_id: Unique identifier for the quiz.
- title: Title or name of the quiz.
- description: Description or instructions for the quiz.

- questions: An array of question IDs associated with the quiz.


Question: Represents a single question in the quiz.

- Object_id: Unique identifier for the question.
- text: The text of the question.
- options: An array of answer options for the question.
- keywords: An array of keywords for the question.
- correctAnswerIndex: Index of the correct answer within the options array.


2. Do the REST API (GET, POST, PUT, DELETE) endpoints /quizzes, /quizzes/:quizId and /question, /question/:questionId are implemented to interact with the MongoDB database namely SimpleQuiz

Note: using Mongoose populate in order to display all questions in quiz when do endpoint /quizzes


route GET/quizzes

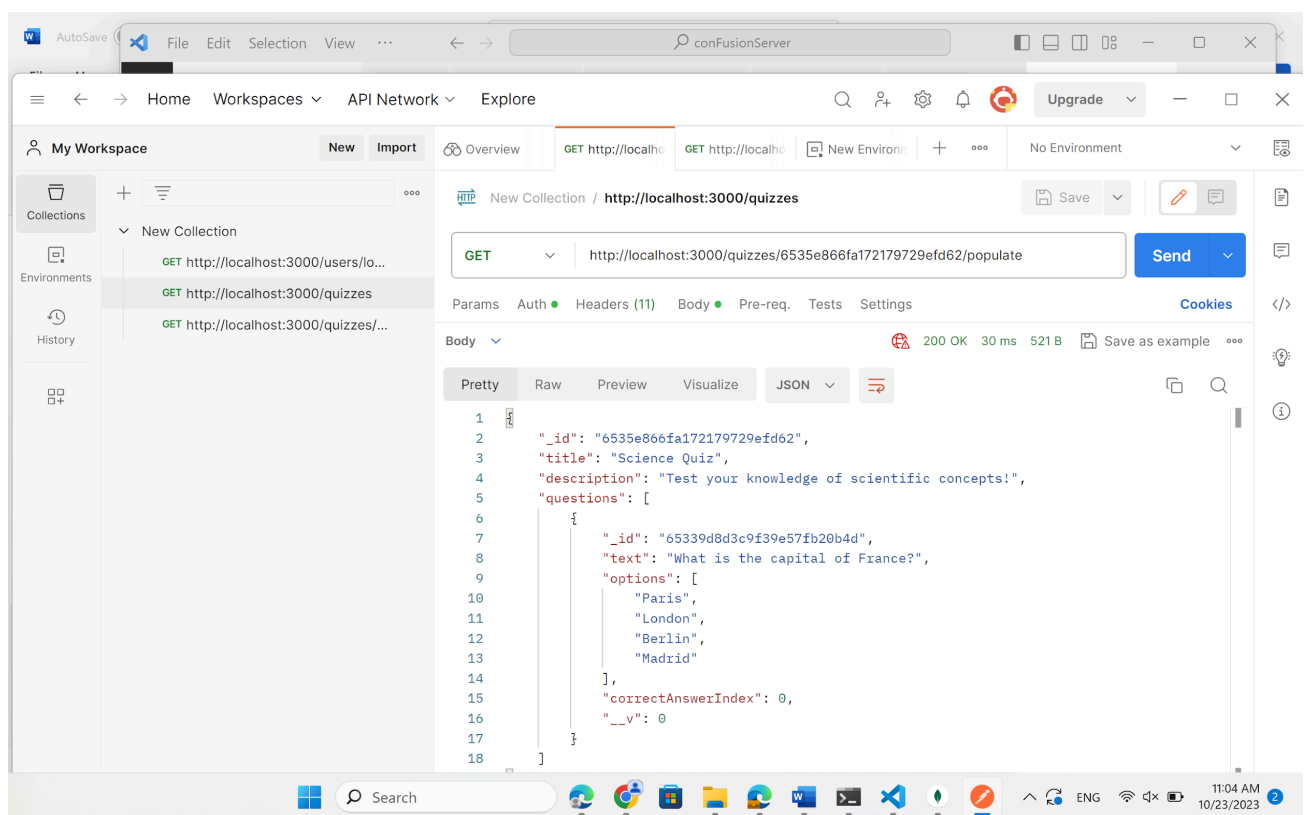


Run chạy route POST/questions

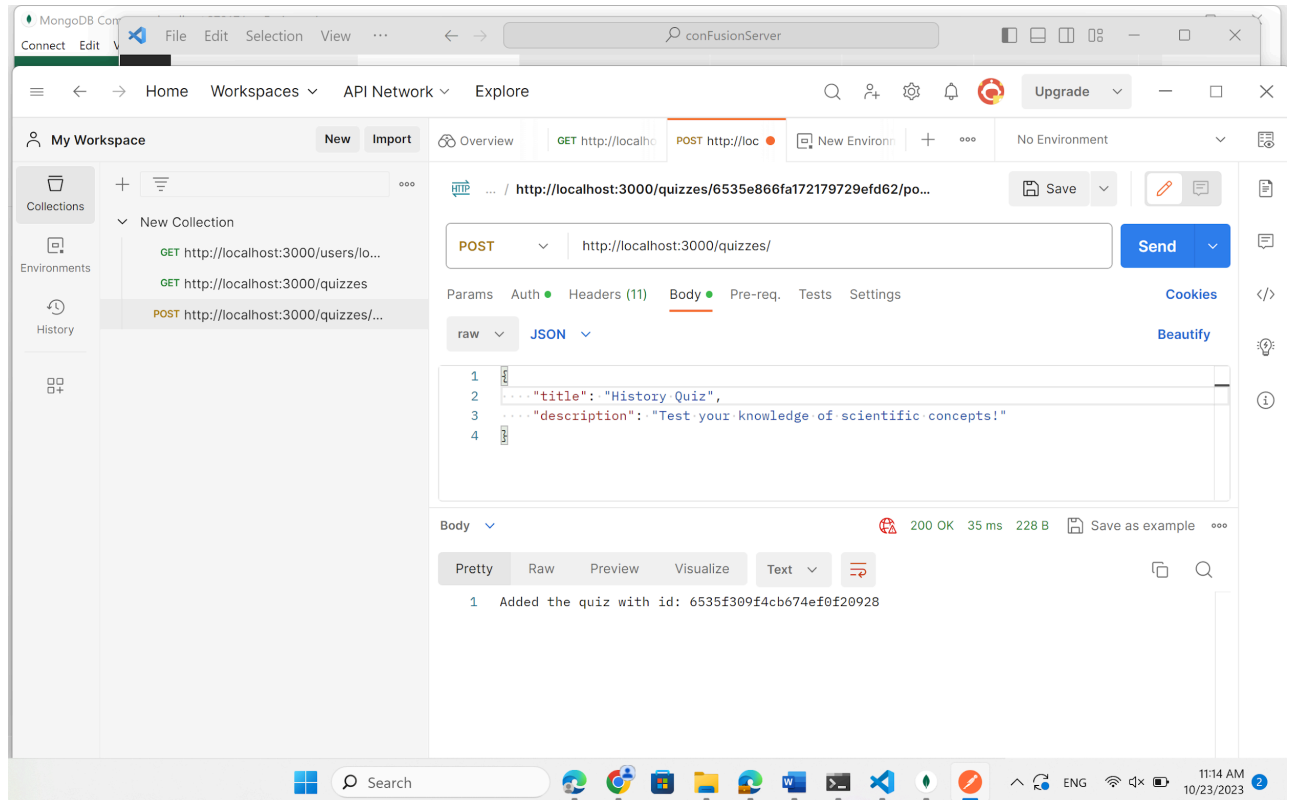

Run chạy route DELETE/quizzes/:id

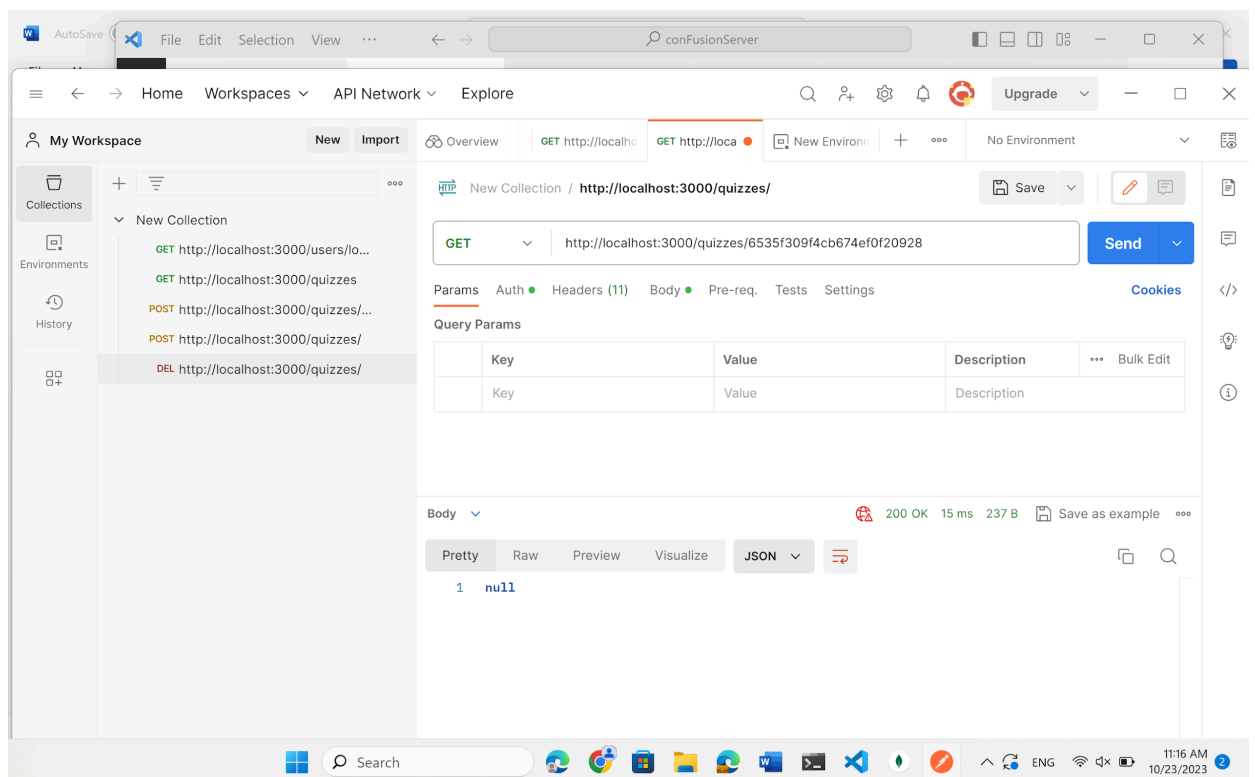

3. Do the REST API (GET) endpoints `/quizzes/:quizId/populate` to match all questions with the word "capital"

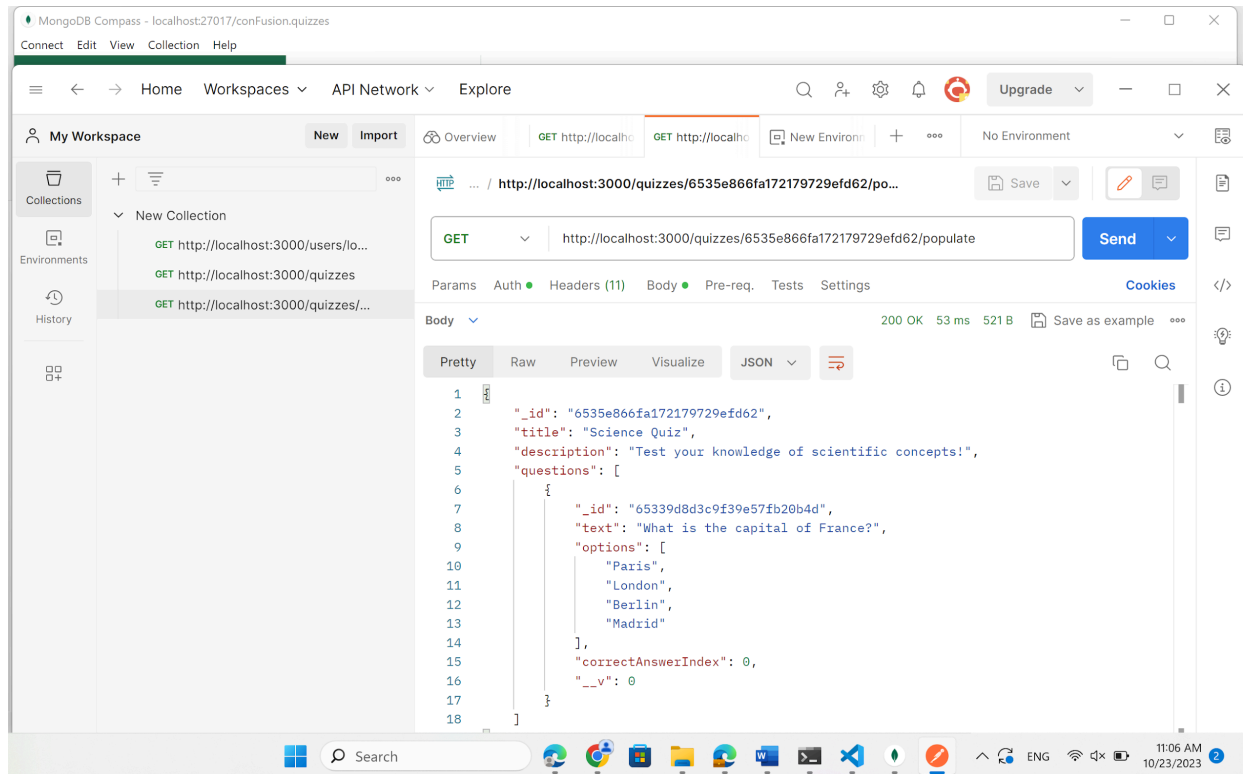

4. Do the REST API (POST) endpoints `/quizzes/:quizId/question` to create new question in quizId

POST

https://localhost:3443/quizzes/65ee9f0c9eb6744aa7fbc604/question

Send

Params

Authorization

Headers (9)

Body

Pre-request Script

Tests

Settings

Cookies

Beautify

none

form-data

x-www-form-urlencoded

raw

binary

JSON

```

1  {
2    "text": "What is the capital of France?",
3    "options": [
4      "Paris",
5      "London",
6      "Berlin",
7      "Madrid"
8    ],

```

Body

Cookies

Headers (7)

Test Results

201 Created

57 ms

393 B

Save Response

Pretty

Raw

Preview

Visualize

JSON

```

4      "Paris",
5      "London",
6      "Berlin",
7      "Madrid"
8    ],
9    "correctAnswerIndex": 0,
10   "_id": "663b47be5b66547571a7568b",
11   "__v": 0
12 }

```

5. Do the REST API (POST) endpoints /quizzes/:quizId/questions to create many new questions in quizId

POST

https://localhost:3443/quizzes/65ee9f0c9eb6744aa7fbc604/questions

Send

Params

Authorization

Headers (9)

Body

Pre-request Script

Tests

Settings

Cookies

none

form-data

x-www-form-urlencoded

raw

binary

JSON

Beautify

```

1  [
2    {
3      "text": "What is the capital of Germany?",
4      "options": [
5        "Paris",
6        "London",
7        "Berlin",
8        "Madrid"
9      ],
10     "correctAnswerIndex": 0
11   },
12   {
13     "text": "What is the capital of England?",
14     "options": [

```

Body

Cookies

Headers (7)

Test Results

200 OK

45 ms

278 B

Save Response

Pretty

Raw

Preview

Visualize

JSON

1

{

2

"message": "Questions added successfully."

3

}