



# Motivation for monitoring

- Rapidly detect and fix problems
- Identify the source of problems
- Predict and avoid future problems
- Provide data on SA's achievements

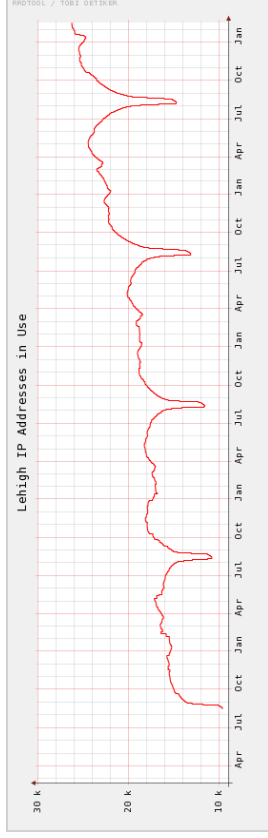

## Historical data

- Historical availability
  - record long-term uptime statistics
  - show improvements (99.99% uptime vs 99.9%)
- Utilization data useful for capacity planning
- Process
  - Poll systems at regular intervals
  - Collected, often graphed
  - Example: network status
    - <https://ss.cc.lehigh.edu/public/mrtg/internett.html>




# CSE 265: System and Network Administration

*If you aren't measuring it, you aren't managing it.*


- Service Monitoring
  - Syslog and Log files
    - Logging policies – what do you do with logs?
    - Linux log files
    - Logrotate: Manage log files
  - Syslog: system event logger
  - Condensing log files
- Historical data
  - Real-time monitoring
    - Alerting
    - Active monitoring systems
  - End-to-end tests
  - Application response time monitoring

## Motivation for monitoring

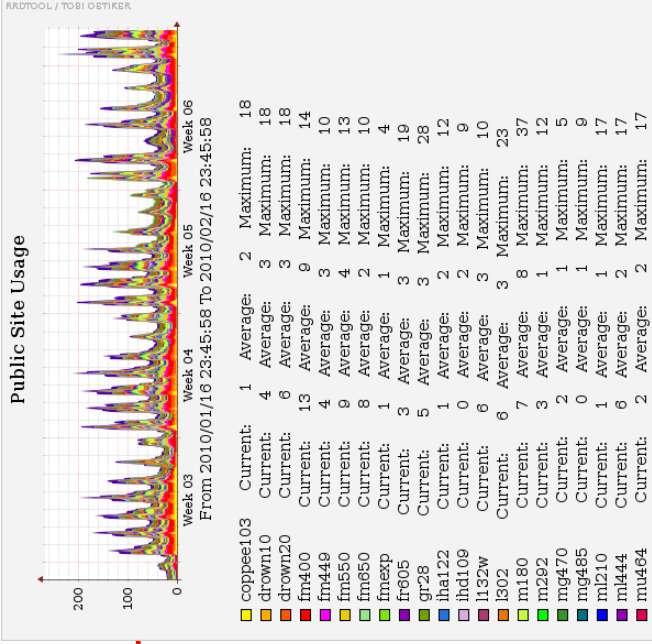

# Real-time monitoring

- Alert SA immediately about a failure
- Want to notice outage before customer does
  - maintain reputation
  - minimize downtime
- Two components
  - Monitoring (polling) systems to check status, watching error messages, checking subsystems
  - Alerting – recognize problems and notify SAs

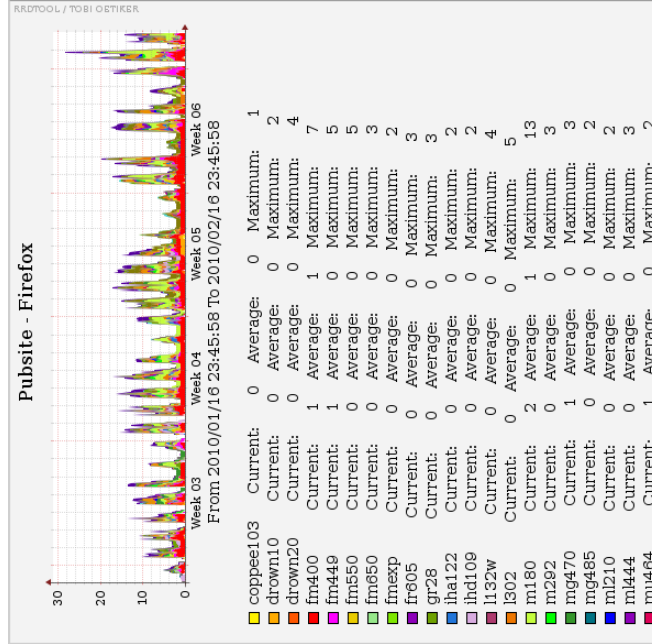

# Monitoring

- Want to monitor everything that can indicate a problem
- Availability monitoring
  - Host/network/application failures
- Capacity monitoring
  - Approaching or past overload

# Alerting

- Monitoring useless without alerting system
- Should not depend on system being monitored
  - e.g., don't depend on e-mail if network is down
- Who gets alerts? What if failure persists?
- Need to test alerting system
  - Funny story about an alerting system that called the SA saying “I'm hot! I'm wet!” (wife of SA did not approve)

Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison


# Active monitoring

- Don't just monitor and alert, do something!
- Respond quickly/automatically
- Temporary solutions
  - Still need a permanent fix
- Can be a security risk (often requires privileges)

Spring 2016


CSE 265: System and Network Administration

©2004-2016 Brian D. Davison

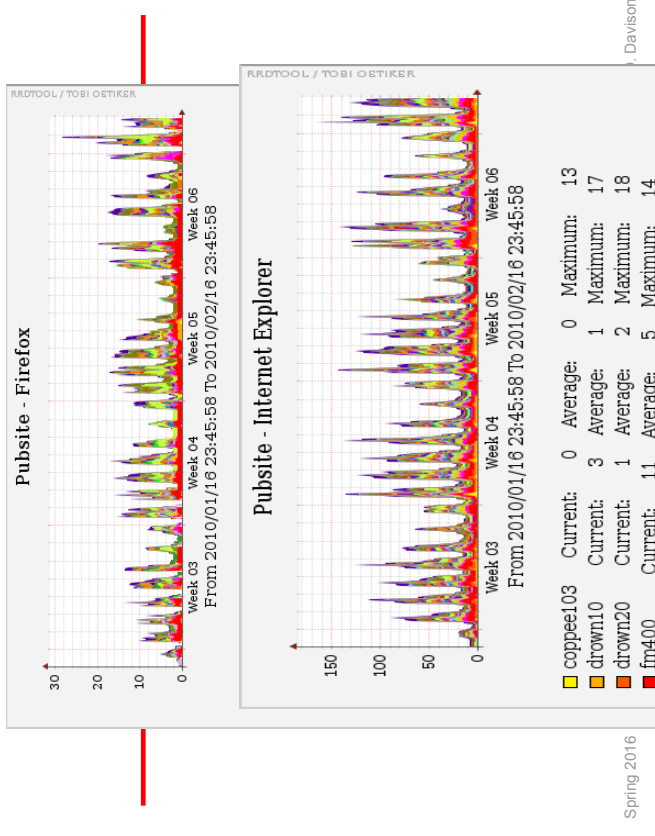

Spring 2016

J. Davison

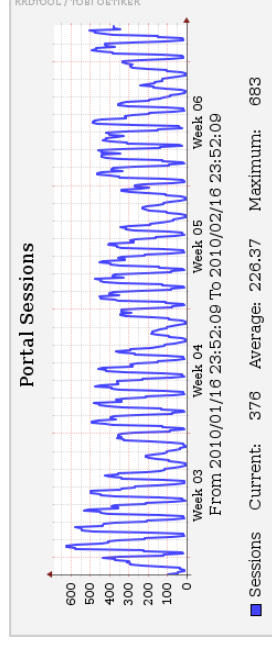

Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison

# Summary

- Two types of monitoring:
  - Historical data gathering
    - Trends for capacity planning
    - Recognition of long-term improvements
  - Real-time monitoring and alerting
    - Detect problems faster
    - React before failure (e.g., before swap gets full)

Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison

Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison

# End-to-end tests

- Test entire transactions as a simulated customer
  - Send email through a server
  - Log in, select an item, check-out, get receipt
- Find problems before customers
- Find systemic problems, even when individual components are working

# Logging policies

- Log files grow and grow
  - Throwing away log files
- What do you do with log files? Some options:
  - Throw away all data immediately
  - Reset log files periodically
  - Rotate log files, keeping data for a fixed time
  - Compress and archive files to tape or other media
- Throwing away log files
  - Not recommended!
  - Need evidence of security problems
  - Alert for hardware and software problems
  - Ideally, keep for a month
    - may take that long to notice a problem!
  - Resetting when disk is full isn't good either

Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison


Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison

# Application response time monitoring

- Even when everything works, if it is too slow, it is a failure
  - Loss of productivity
  - Loss of sales
  - Resentment
- Use historical monitoring, too



# Linux log files



- Most log files are recorded in `/var/log`
  - `/var/adm` may also contain some (distro dependent)
- Most programs send entries to `syslogd` daemon
  - `/etc/rsyslog.conf` usually puts them in `/var/log`
- Sample log files:
  - `messages` – main system log file
  - `maillog` – record of sendmail activity
  - `boot.log` – output of system startup scripts

Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison

# Rotating log files

- Keep a fixed set of previous log files
  - Rotate current file into set on a regular basis (daily, weekly, etc.)
- Example:

```
#!/bin/sh
cd /var/log
mv logfile.2 logfile.3
mv logfile.1 logfile.2
mv logfile logfile.1
touch logfile
chmod 600 logfile
```
- May want to add compression, reset server

Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison

# Other log files

- `/var/log/wtmp`
  - Record of users' logins and logouts
  - Binary format – use **last** to read
  - Still truncated and rotated
- `/var/log/lastlog`
  - Record of time of last log in
  - Binary format (is used to say when you last logged in)
  - Constant size – no need to rotate
- `/var/log/dmesg`
  - Dump of kernel message buffer at end of boot

Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison

# Archiving log files

- May need to archive all accounting data and log files for policy, potential audits, etc.
- First rotate on disk
  - fast access to recent data
- Then write to tape or other media
- Log files should be part of backup sequence
  - Hackers tend to delete them!

Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison

## Syslog (continued)

- Three parts
  - syslogd – logging daemon (uses /etc/rsyslog.conf)
  - openlog – library routines
  - logger – shell command to submit log entries
- Apps use library to write to /dev/log
  - UNIX domain socket
- Syslogd reads messages from /dev/log
  - Outputs message depending on /etc/rsyslog.conf

Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison

## Logrotate

- Excellent utility to manage log files
- Specifies groups of log files to be managed

```
# Example log rotation
rotate 5
weekly

/var/log/messages {
    postrotate
        /bin/kill -HUP `cat /var/run/syslogd.pid`
    endscript
}
/var/log/samba/*.log {
    notifempty
    copytruncate
    postrotate
        /bin/kill -HUP `cat /var/lock/samba/*.pid`
    endscript
}
```

Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison

## Sample syslog.conf

```
# Emergencies: tell everyone who is logged in
*.emerg:user.none *

*.warning;daemon,auth.info,user.none /var/log/messages
# Forward important messages to the central logger
*.warning;daemon,auth.info @netloghost

# printer errors
lpr.debug /var/log/lpd-errs
```

Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison

## Syslog

- Comprehensive logging system
  - Frees programmers from needing to write their own
  - Allows sysadmins to control logging
- Flexible
  - Can sort by source or severity level
  - Output to variety of destinations – files, terminals, other machines
- Can centralize logging to a well-controlled machine
- RHEL/CentOS 6 uses rsyslog (improved)

Spring 2016

CSE 265: System and Network Administration

©2004-2016 Brian D. Davison

# Summary

---

- It is imperative to monitor systems and generate logs
  - For warnings, job performance, trends, etc.
- Logs cannot be permitted to impact proper system operation

# Sample syslog output

---

```
Feb 22 04:04:21 wume1 named[2826]: lame server
resolving '211.68.246.64.in-addr.arpa' (in
'68.246.64.in-addr.arpa'): 160.79.6.130#53
Feb 22 13:22:41 wume1 sshd(pam_unix)[16776]: session
opened for user brian by (uid=0)
Feb 22 13:22:44 wume1 su(pam_unix)[16802]: session
opened for user root by brian (uid=501)
Feb 25 20:31:57 wume1 sshd(pam_unix)[28375]: check
pass; user unknown
Feb 25 20:32:00 wume1 sshd(pam_unix)[28375]: 1 more
authentication failure; logname= uid=0 euid=0
tty=NODEVssh ruser= rhost=dyn032098.cc.lehigh.edu
```

# Condensing log files

---

- Syslog (as well as any other monitoring and logging facility) generates lots of log files
- Need utilities to scan log files and find important entries
  - security-related entries
  - messages about disks full
  - messages repeated many times