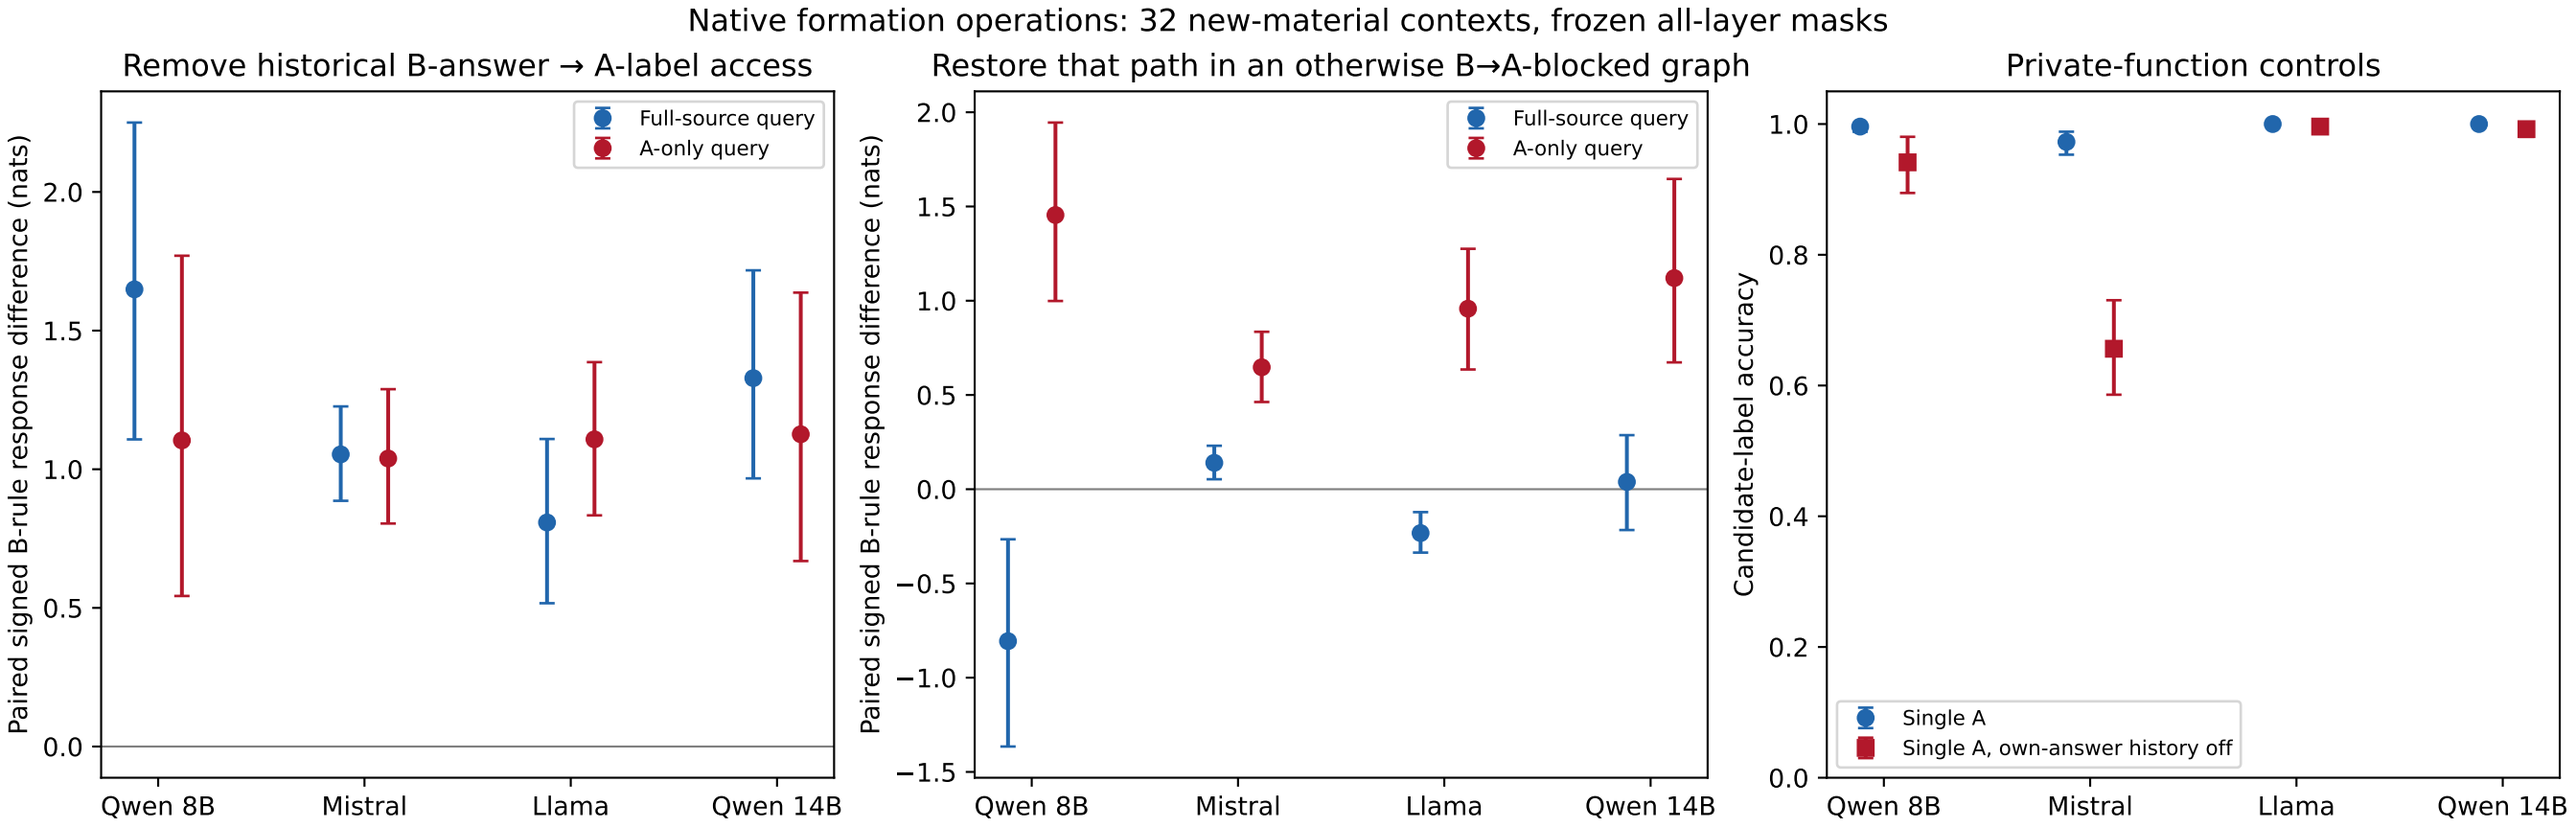
Native formation operations: 32 new-material contexts, frozen all-layer masks
Remove historical B-answer → A-label access
Restore that path in an otherwise B→A-blocked graph
Private-function controls
Paired signed B-rule response difference (nats)
Candidate-label accuracy
Full-source query
A-only query
Single A
Single A, own-answer history off
Qwen 8B
Mistral
Llama
Qwen 14B
2.0
1.5
1.0
0.5
0.0
−0.5
−1.0
−1.5
0.8
0.6
0.4
0.2