E139 — Free/fixed finite-cohort output and component comparison

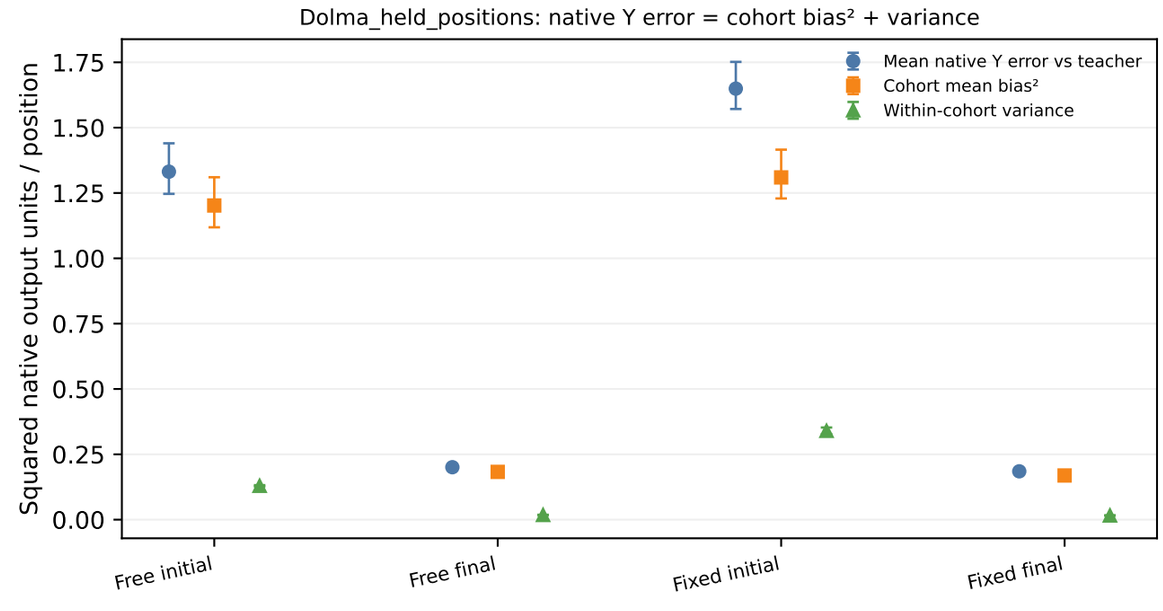

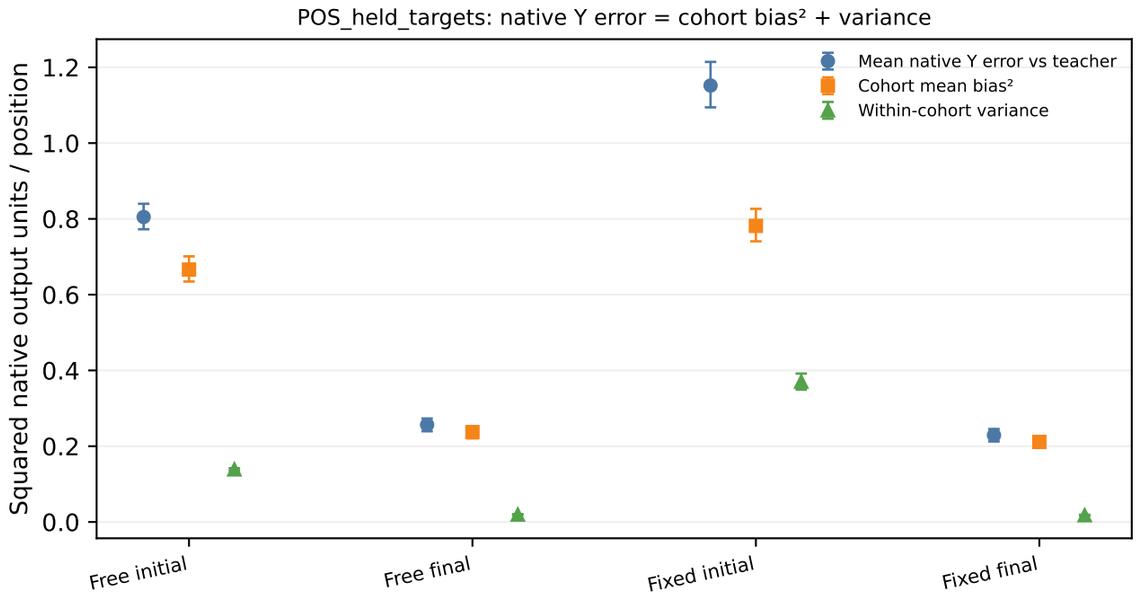

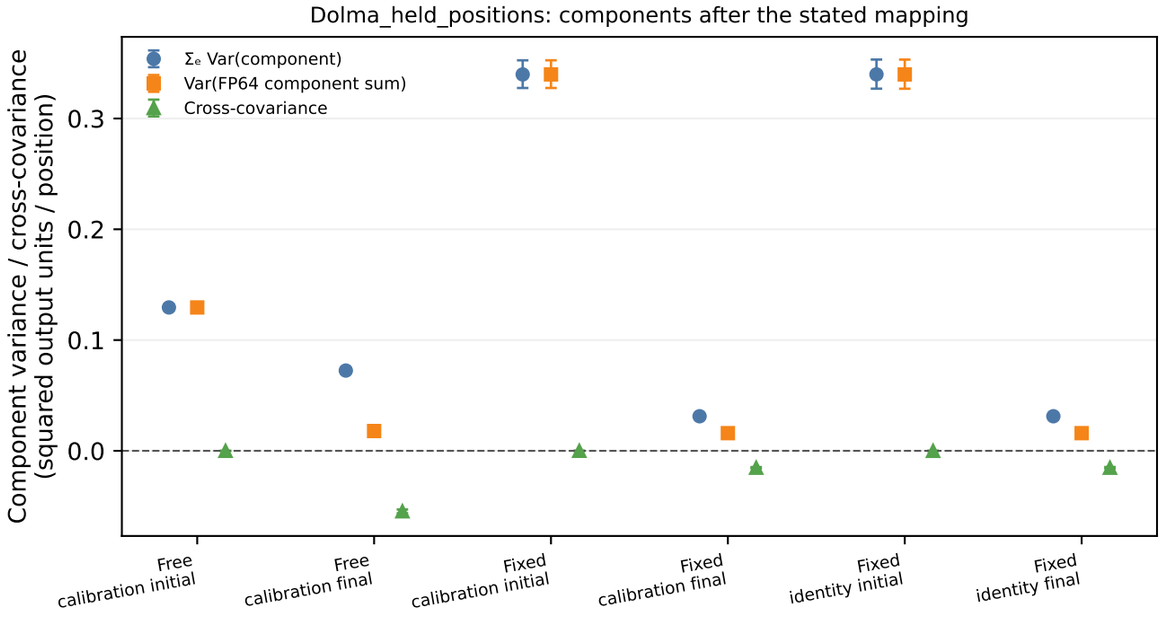

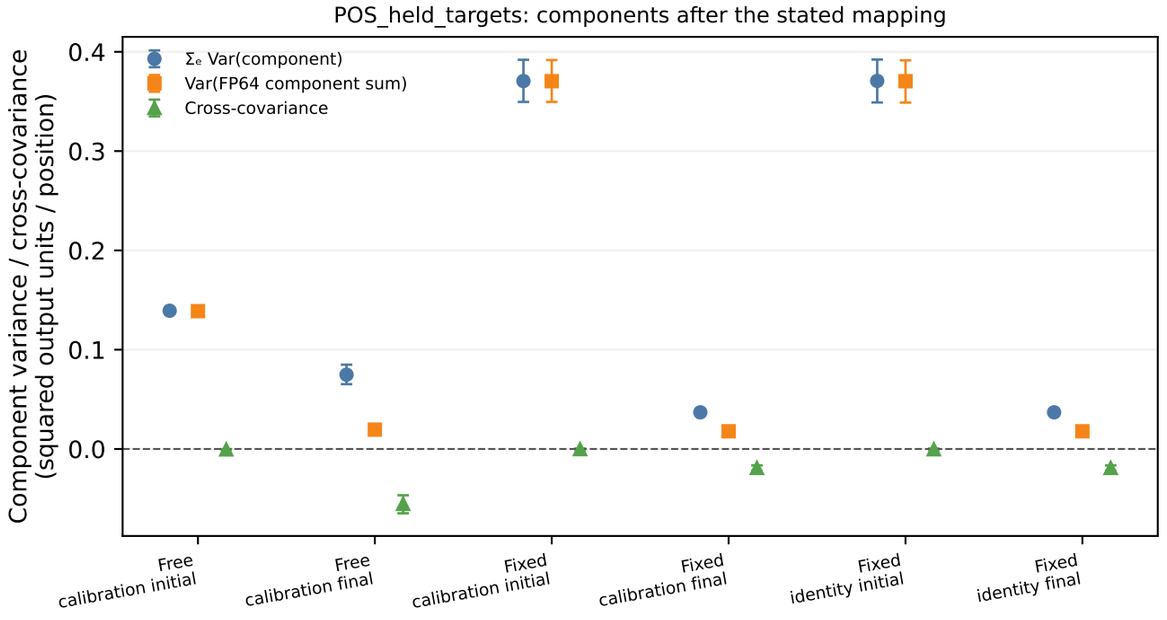

Three fixed students include the previously observed seed1 pilot. Native Y is mapping-independent; component panels separate free/fixed Hcal and fixed identity. POS zero target-on experts are retained: free seed0 11/57, free seed2 6, fixed 42/51/52. A-group differences include support/gate/mask/mapping and row-centered mean effects, not pure content. File/word CIs are not seed CIs; pair observations are dependent. No same-function or unique-role claim.