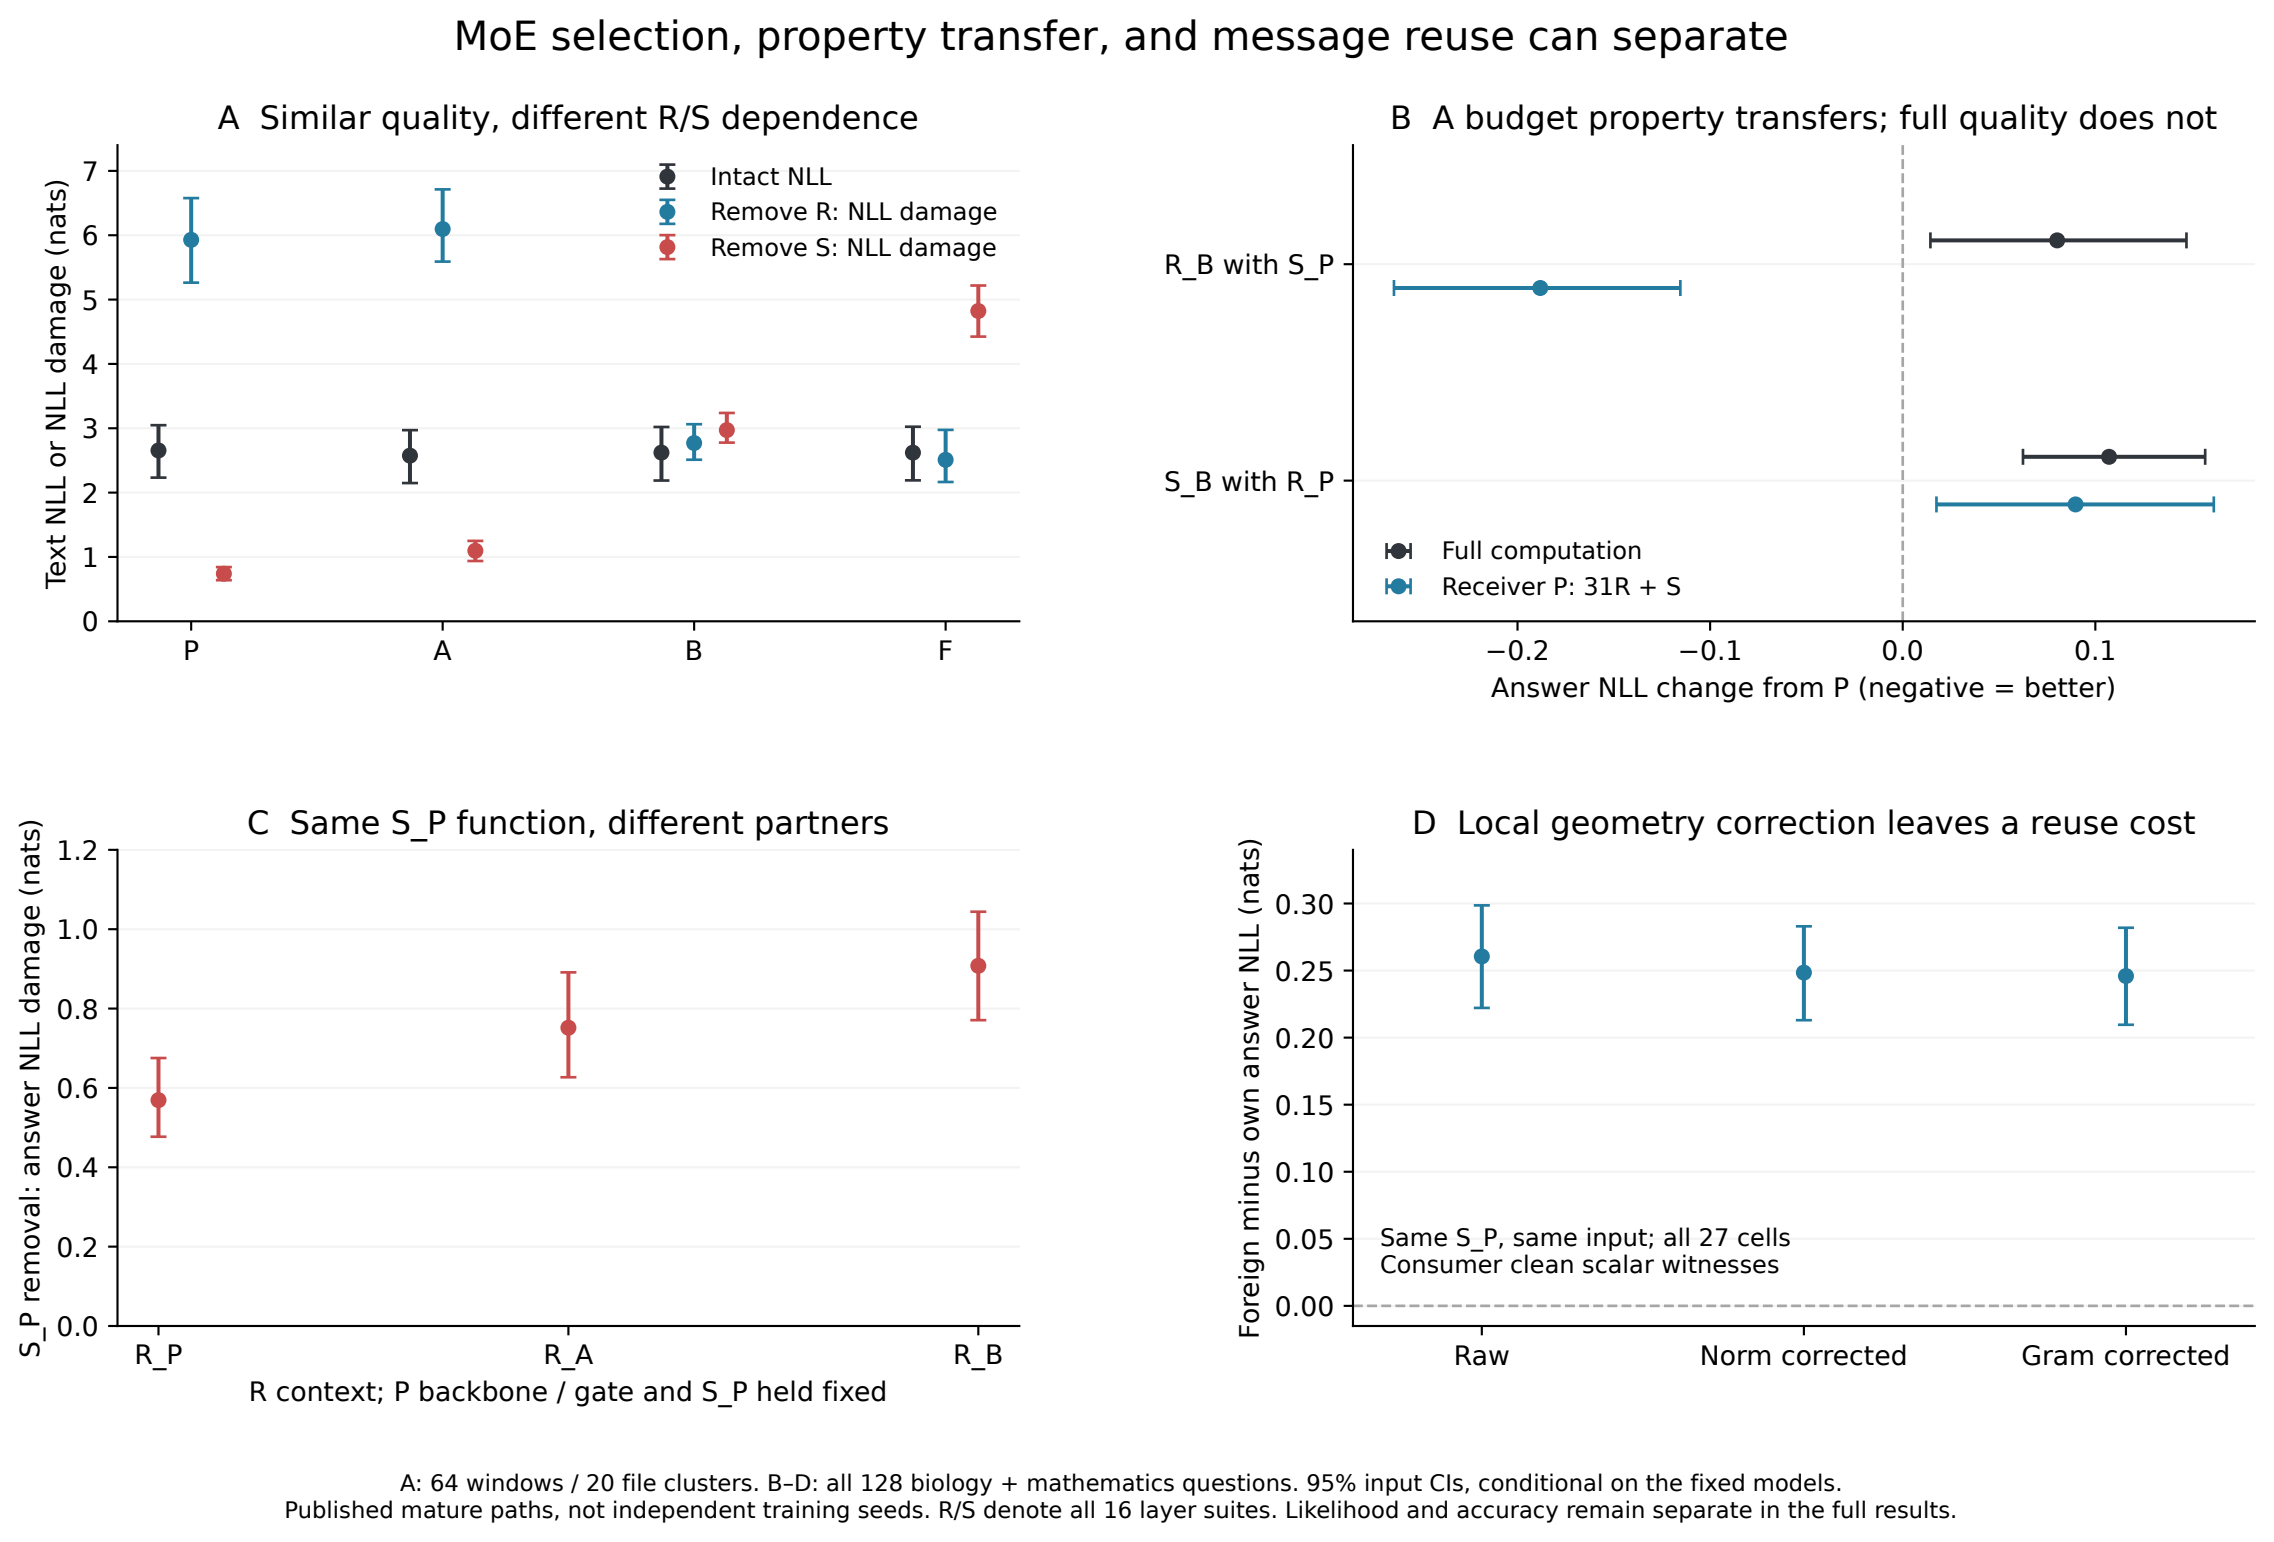
MoE selection, property transfer, and message reuse can separate
A Similar quality, different R/S dependence
Text NLL or NLL damage (nats)
Intact NLL
Remove R: NLL damage
Remove S: NLL damage
P
A
B
F
B A budget property transfers; full quality does not
R_B with S_P
S_B with R_P
Full computation
Receiver P: 31R + S
−0.2
−0.1
0.0
0.1
Answer NLL change from P (negative = better)
C Same S_P function, different partners
S_P removal: answer NLL damage (nats)
R_P
R_A
R_B
R context; P backbone / gate and S_P held fixed
D Local geometry correction leaves a reuse cost
Foreign minus own answer NLL (nats)
Same S_P, same input; all 27 cells
Consumer clean scalar witnesses
Raw
Norm corrected
Gram corrected
A: 64 windows / 20 file clusters. B–D: all 128 biology + mathematics questions. 95% input CIs, conditional on the fixed models.
Published mature paths, not independent training seeds. R/S denote all 16 layer suites. Likelihood and accuracy remain separate in the full results.