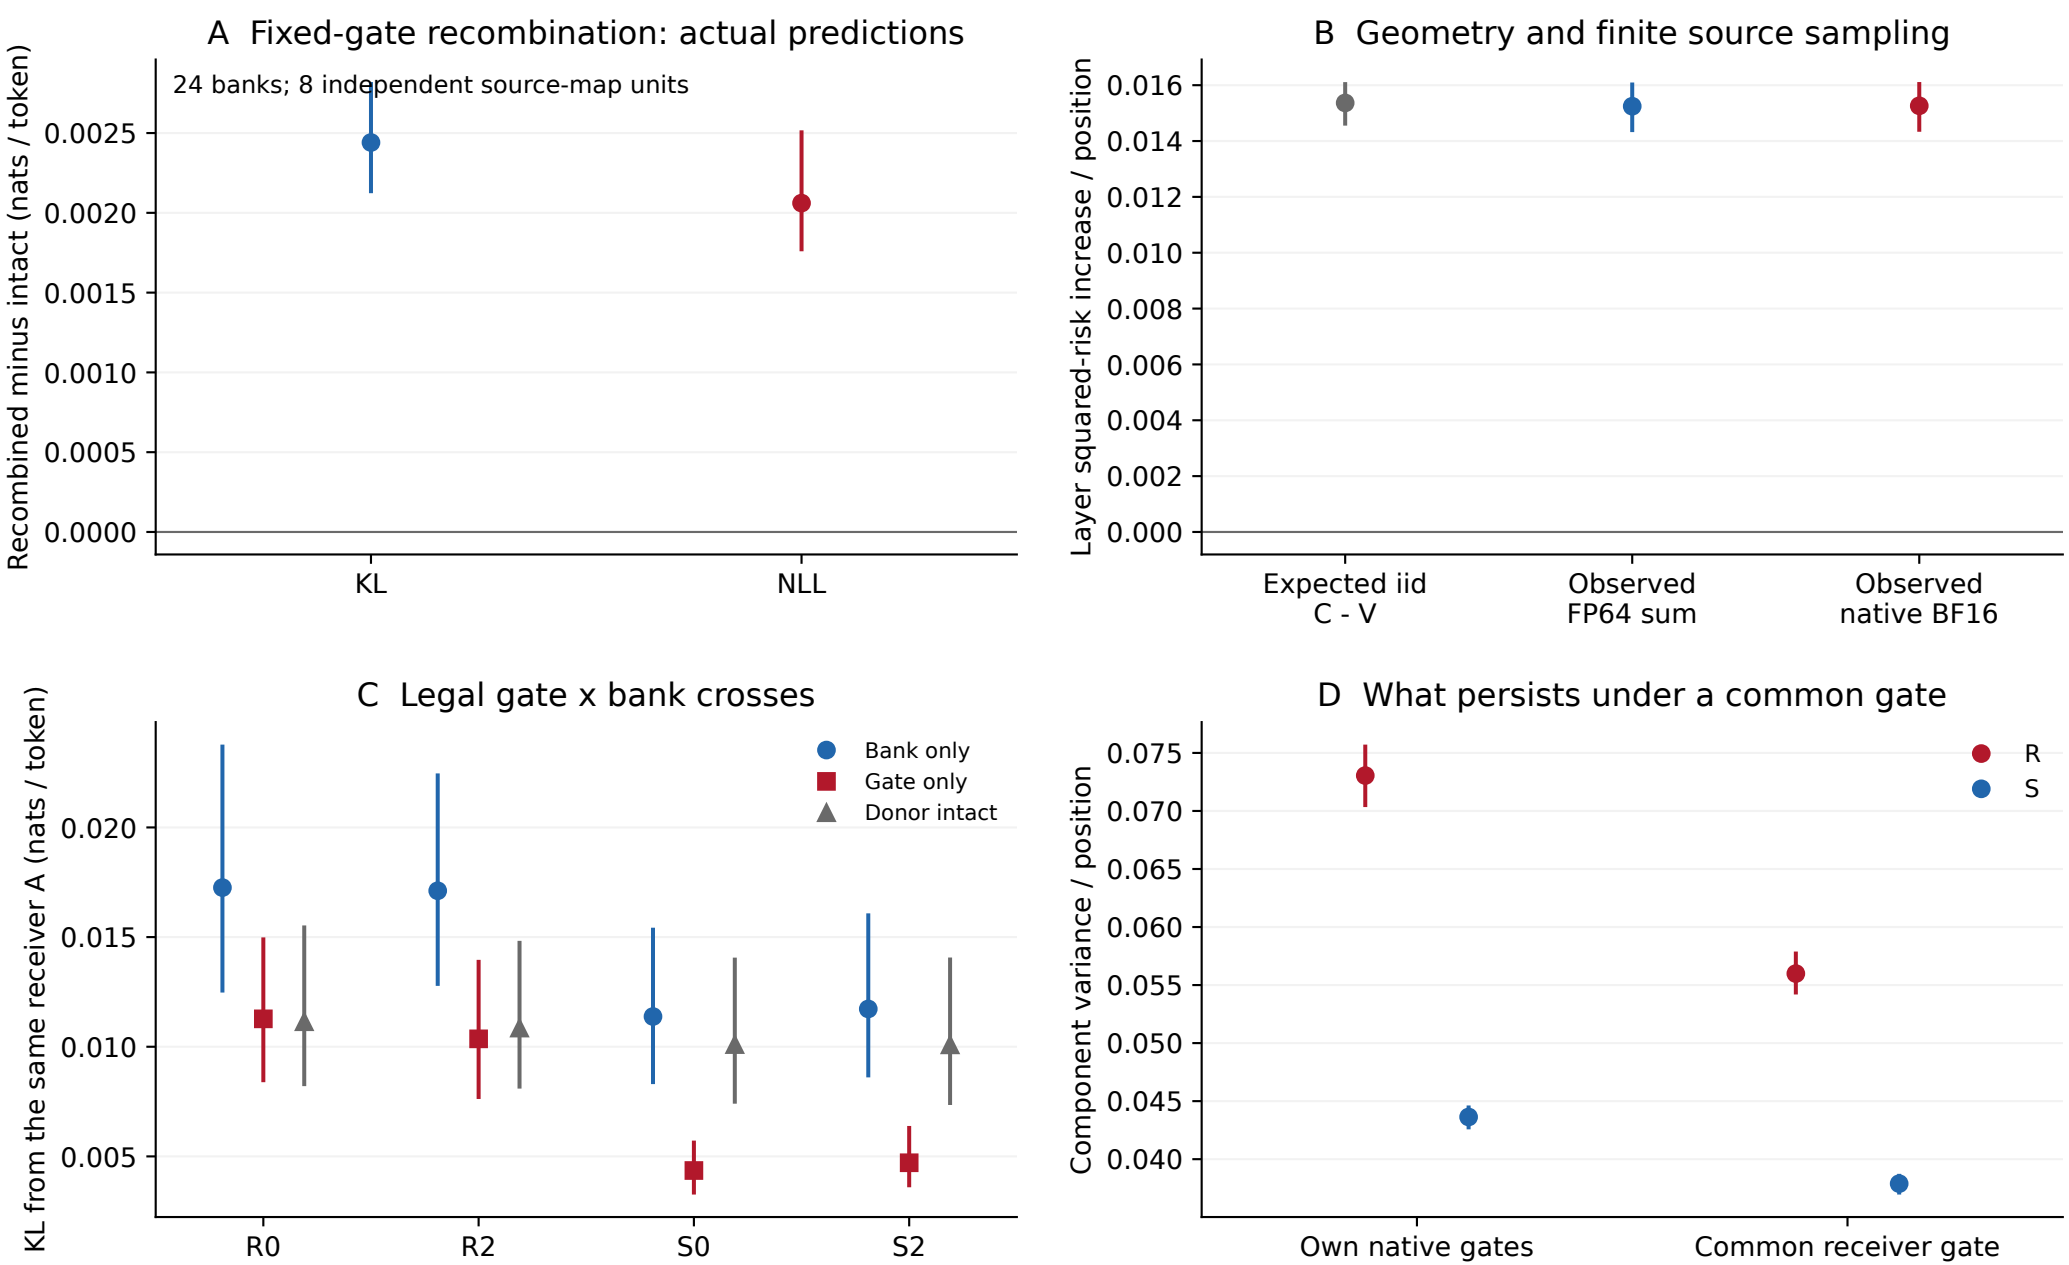

Intervals: fixed-cohort input-file bootstrap; panels A / B observed risks also resample source maps.
One teacher layer, one shared receiver, two paired donors; intervals do not represent a population of training seeds.