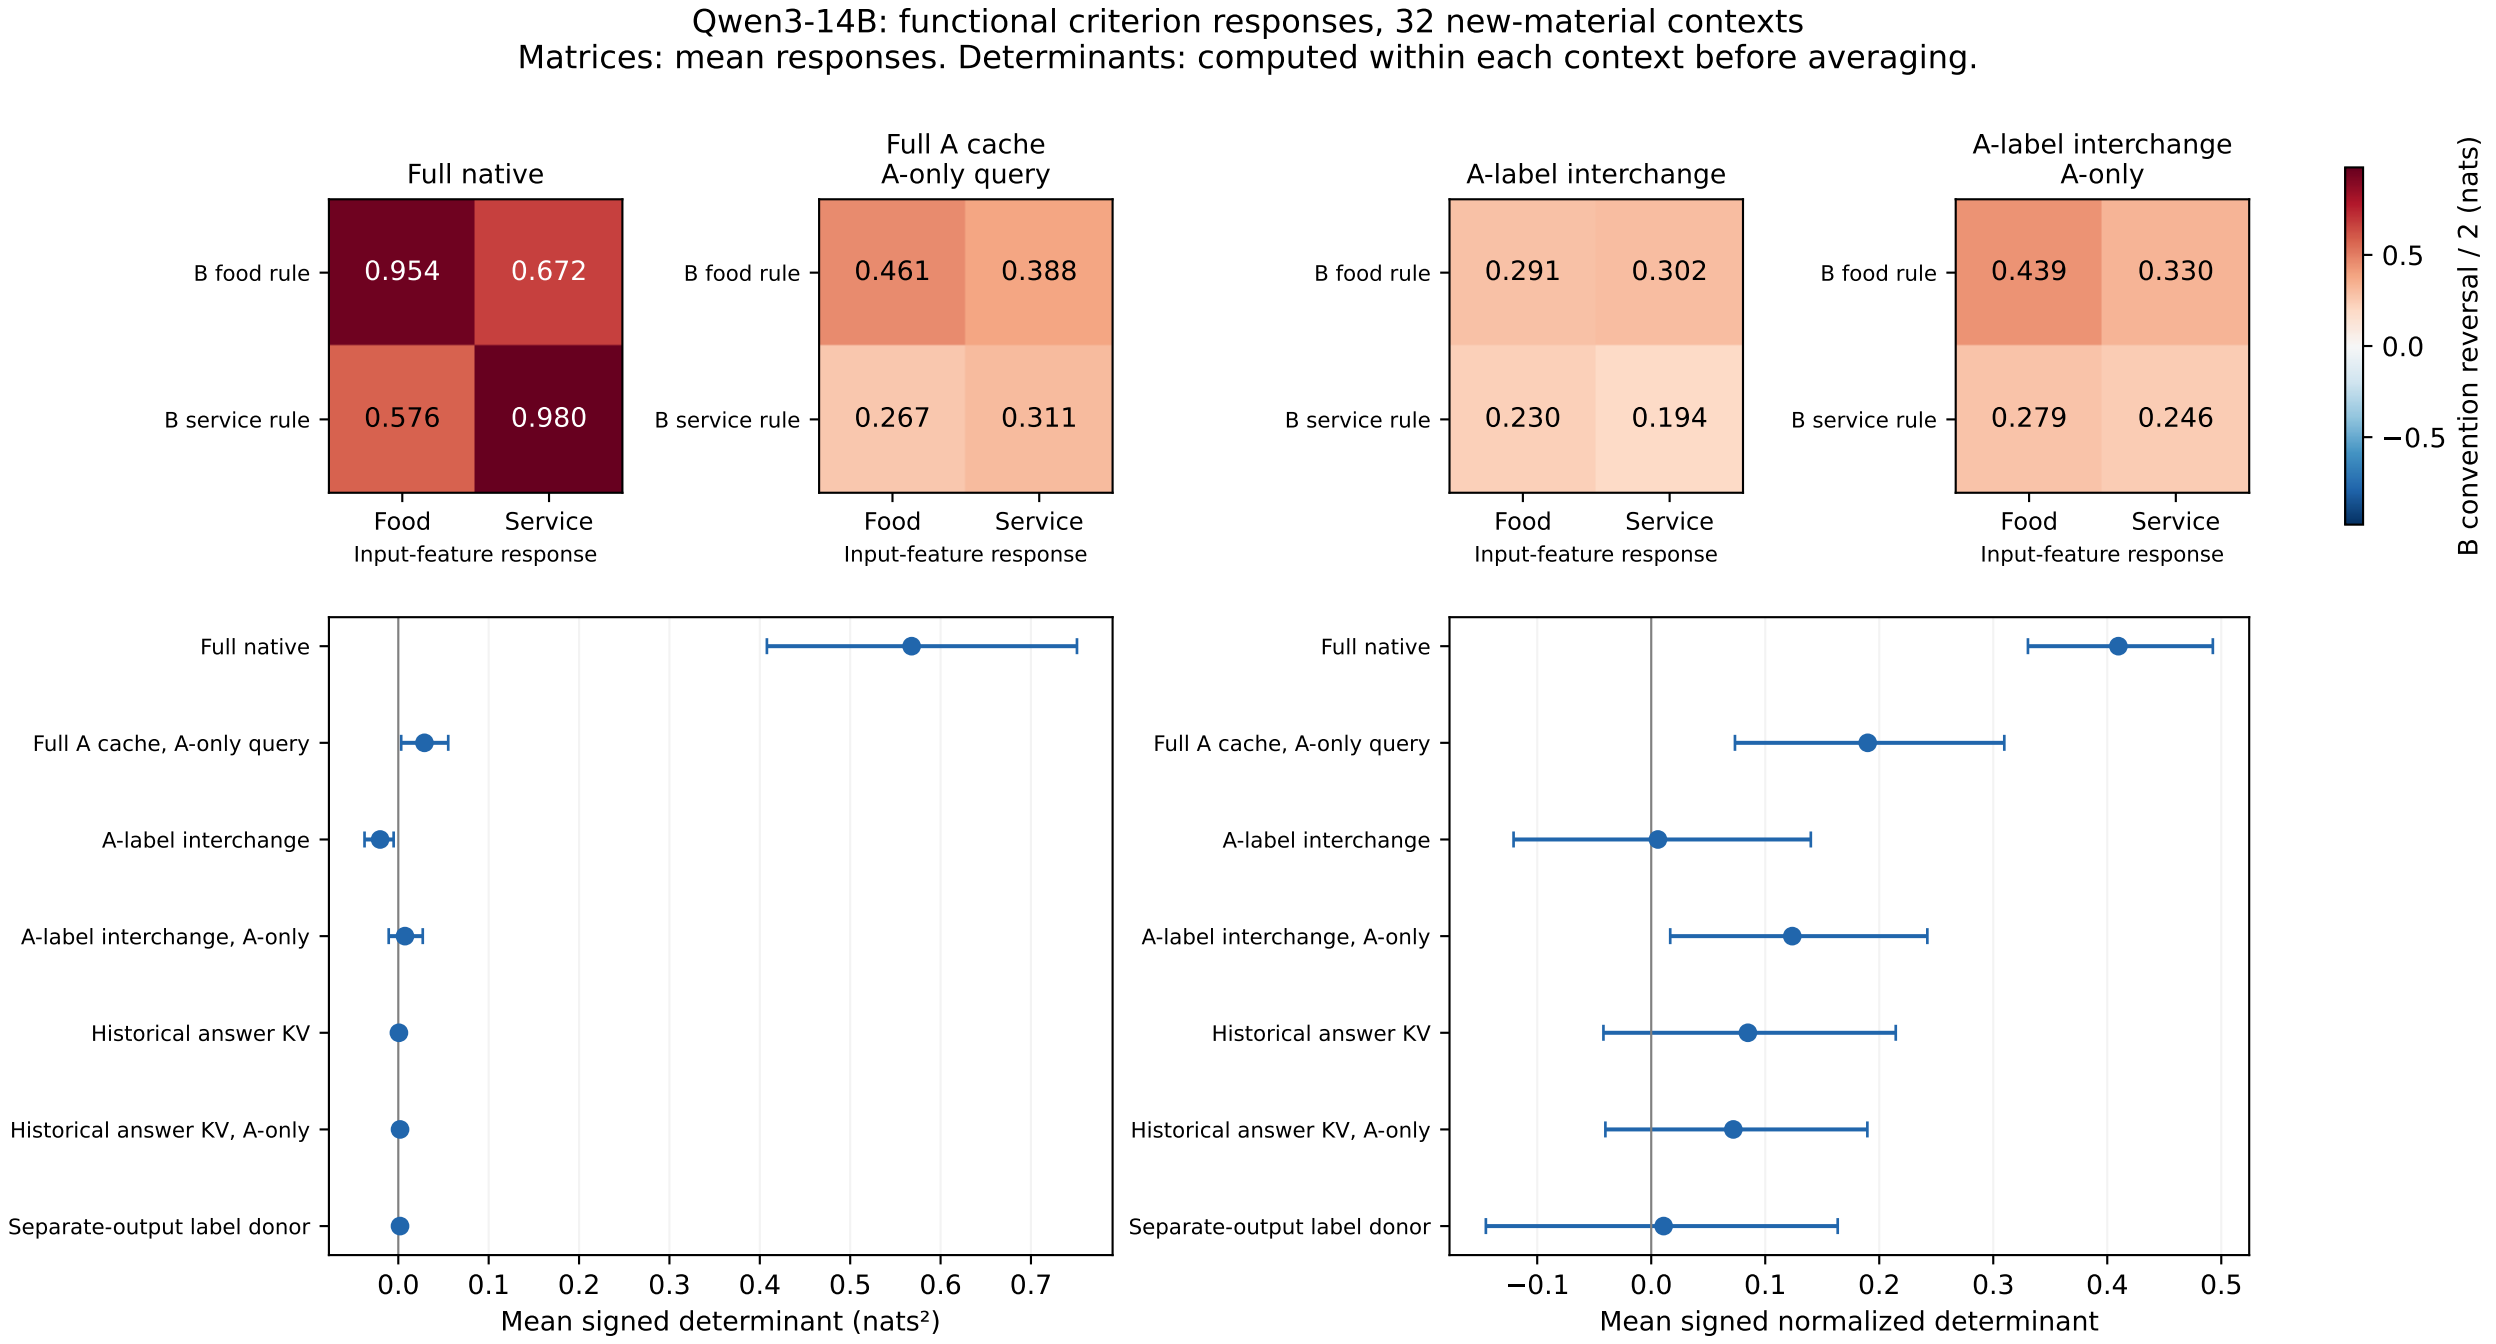
Qwen3-14B: functional criterion responses, 32 new-material contexts
Matrices: mean responses. Determinants: computed within each context before averaging.
Full native
B food rule
B service rule
0.954
0.672
0.576
0.980
Food
Service
Input-feature response
Full A cache
A-only query
0.461
0.388
0.267
0.311
A-label interchange
0.291
0.302
0.230
0.194
A-label interchange
A-only
0.439
0.330
0.279
0.246
B convention reversal / 2 (nats)
0.5
0.0
−0.5
Full native
Full A cache, A-only query
A-label interchange
A-label interchange, A-only
Historical answer KV
Historical answer KV, A-only
Separate-output label donor
0.0
0.1
0.2
0.3
0.4
0.5
0.6
0.7
Mean signed determinant (nats²)
−0.1
Mean signed normalized determinant