Donor probability can increase without a successful first-token answer

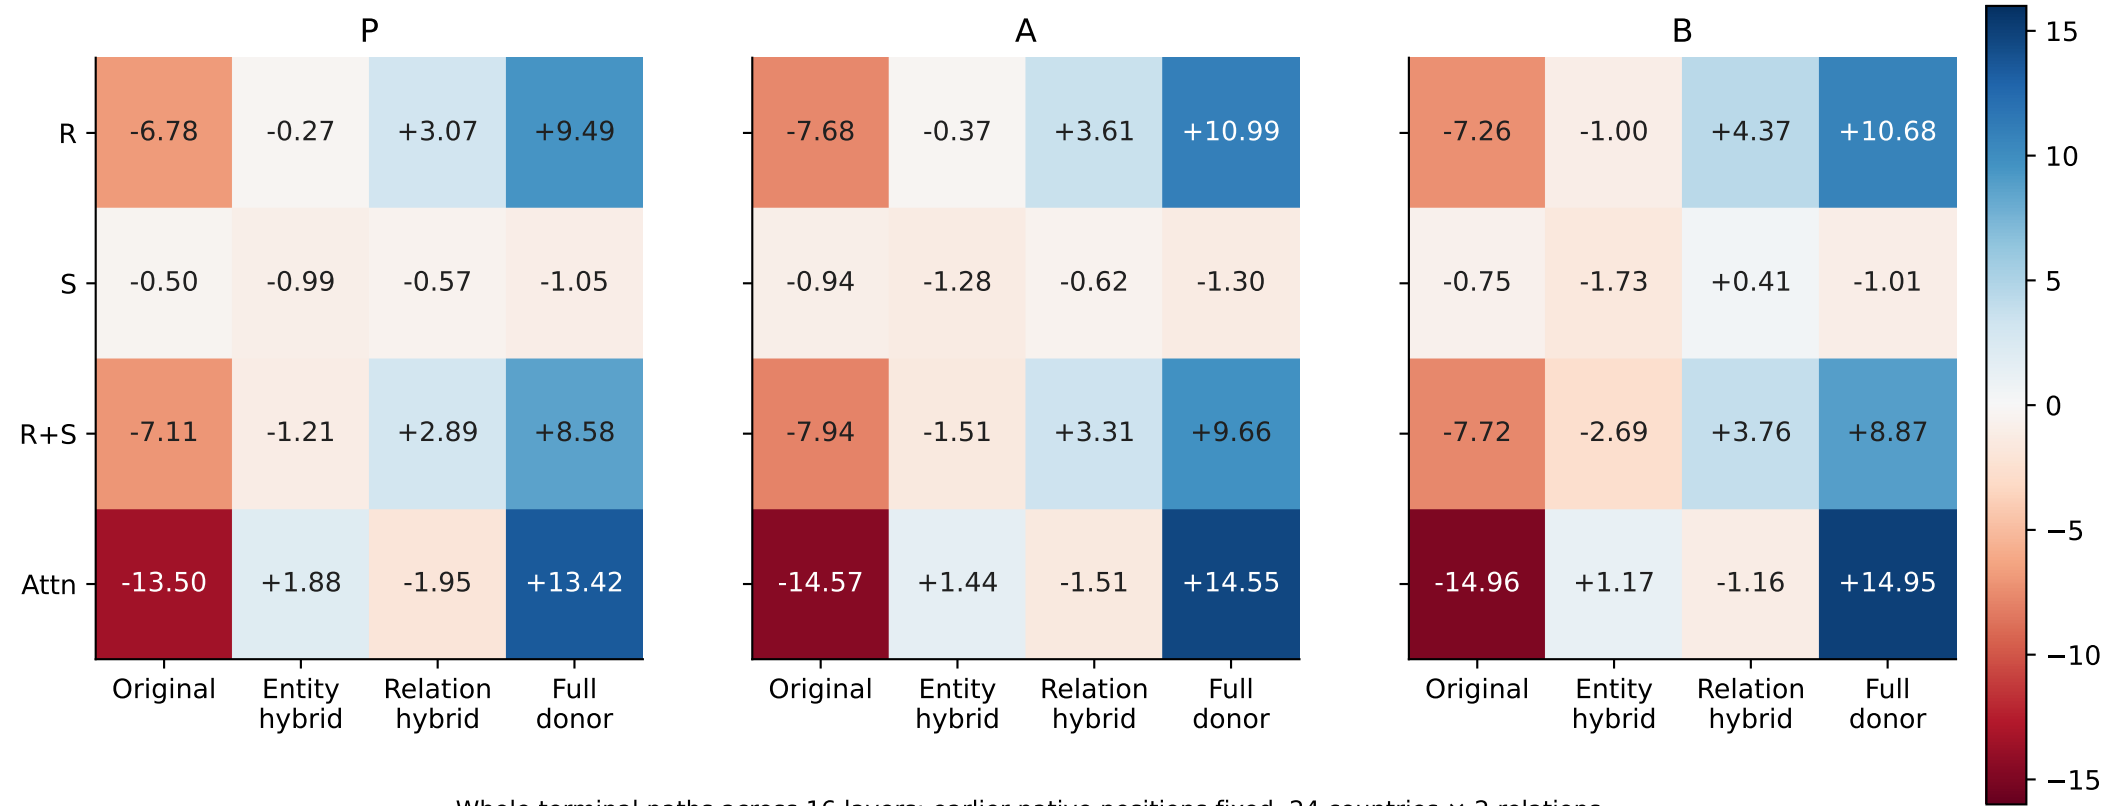

Whole terminal paths across 16 layers; earlier native positions fixed. 24 countries × 2 relations.
All inputs and all four paths retained; first-token readout. Country CIs describe inputs, not training seeds.
Point estimates shown; all paired intervals and relation-specific values remain in summary.json.