E138 — Natural predictor KL and known-identity A

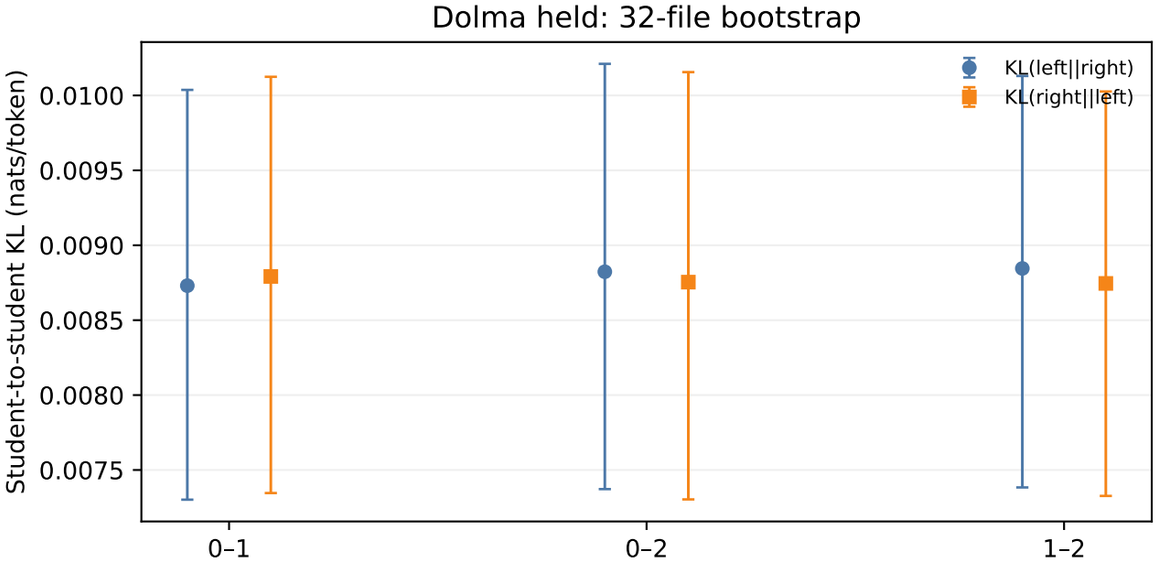

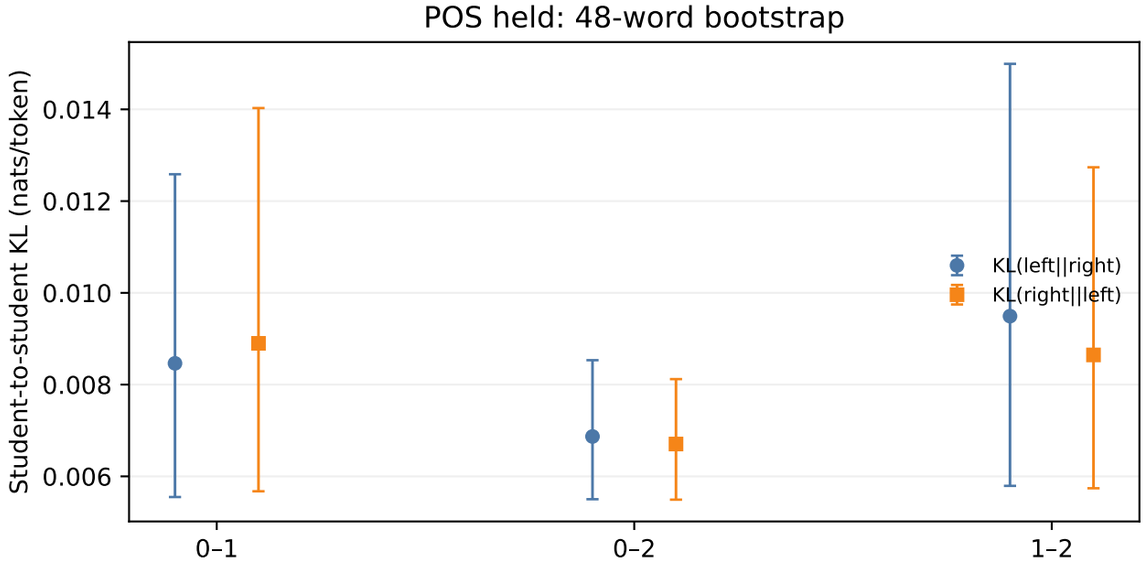

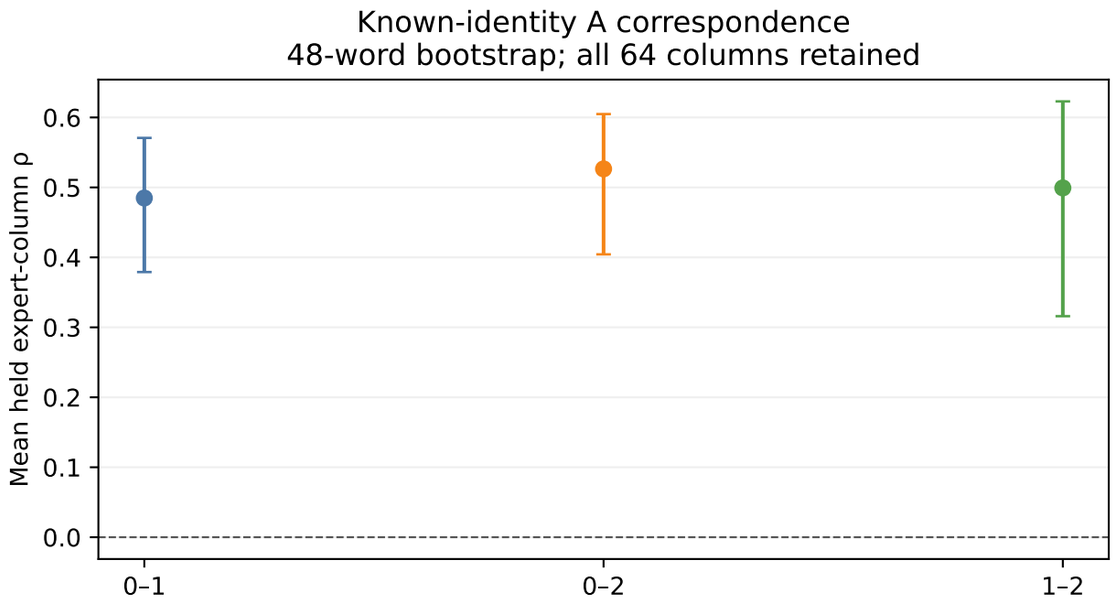

Precision and interval scope

Dolma: BF16 whole logits → FP32 log-softmax; 32 source-file clusters.

POS: BF16 backbone, genuine FP32 final vocabulary head; 48 held words/512 targets.

A: imposed known-identity correspondence; 64 expert columns, held-word bootstrap.

All CIs describe input-cluster uncertainty only, not uncertainty over the three students or independent seed pairs.

Student pair intervals are dependent because there are only three fixed students; no pair is treated as an independent seed sample.