
Map A — classical linear subspace fitted on the 400 Olivetti images (unsupervised, transductive: it sees the probe images).

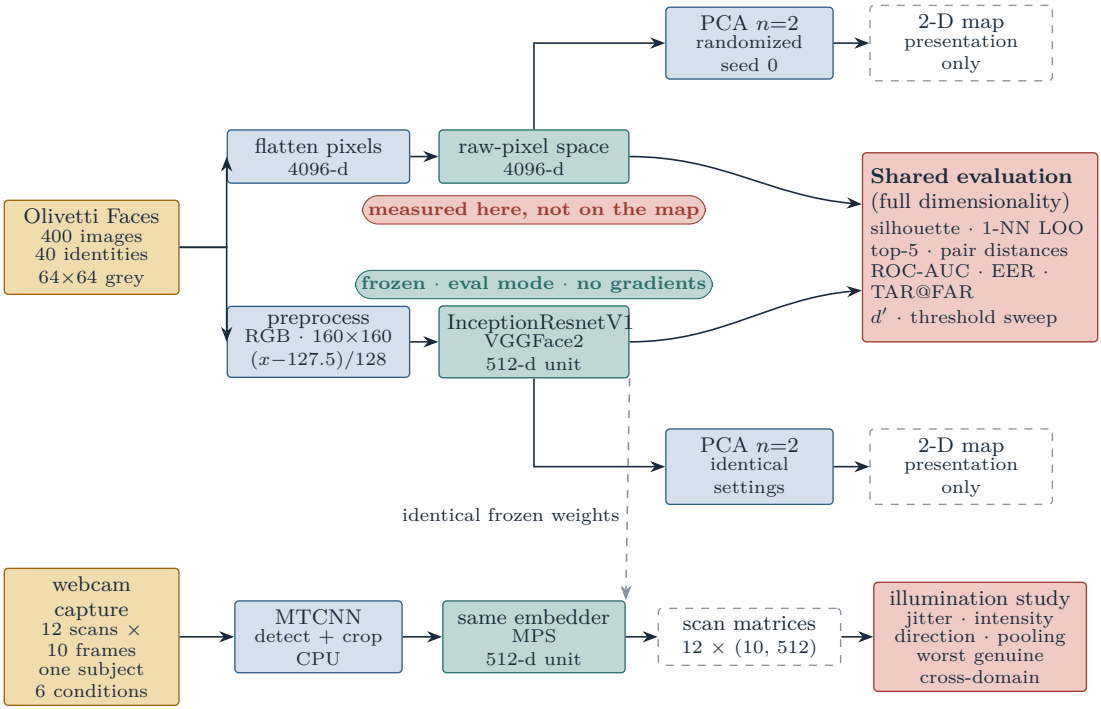

Map B — pretrained deep embedding; the network never sees Olivetti during training. Arrows show data flow, not training.