



Within-slide Pearson lost
relative to a random split

all 10 tasks

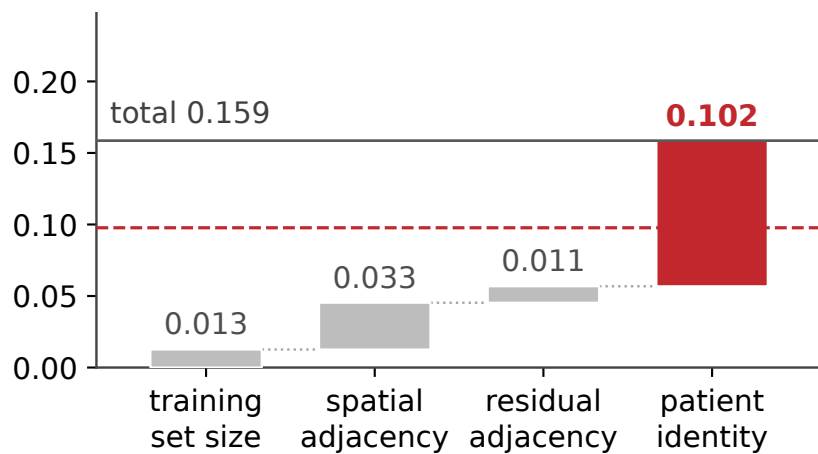


3 multi-slide tasks
(COAD, PRAD, READ)

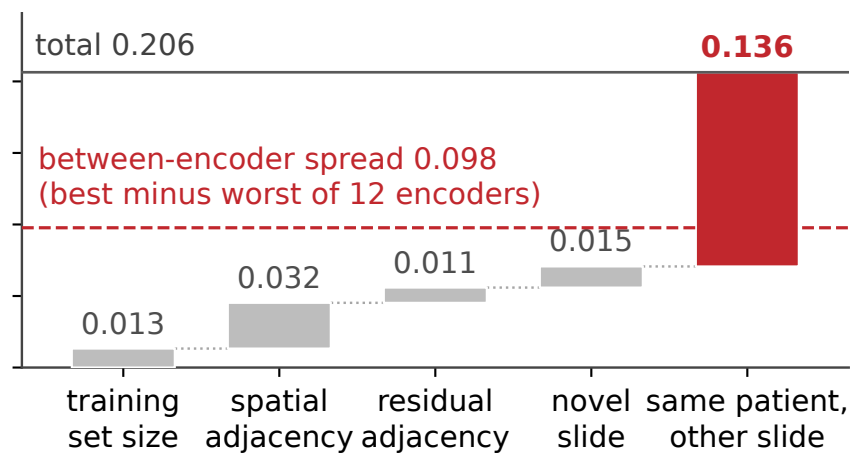

buffer removes the
grid dependence

Within-slide Pearson

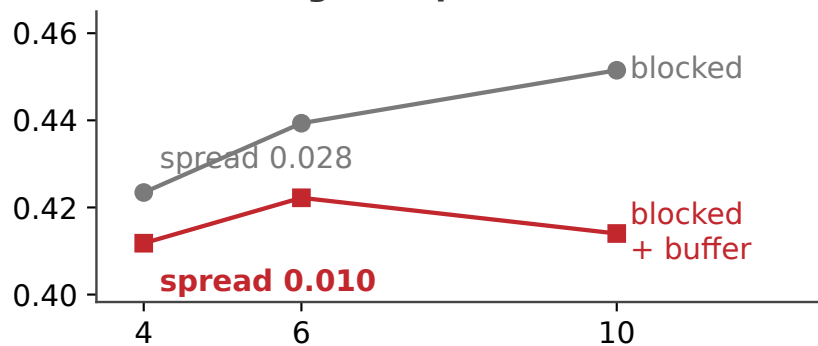

Block grid (cells per side)

Means over three encoders throughout.

Top left: all 10 tasks, 30 encoder-task cells.

Top right: COAD, PRAD, READ only -- the tasks where a patient contributes more than one slide, so the last two steps are separable. On the other seven each patient has one slide and they are the same contrast.

Bottom: mean over tasks, folds and repeats per grid.