


DAY 3 - PLACEMENT

20 May 2026 09:41 AM

HOW TO IMPORT A PICTURE FROM ASSETS IN OUR PROGRAM:

```
App.jsx X Car.jsx first-project Task1.jsx
first-project > src > App.jsx > App > car > color
1 import './App.css'
2 import Car from './Component/Car'
3 import camry from './assets/camry.avif'
4
5 function App() {
6   //const student = { name: "James", id: "WIPRO7839A2", dept: "Global IT Infrastructure" };
7   const car = { make: "Toyota", model: "Camry", year: 2020, color: "Red", picture: camry };
8   return (
9     <>
10      /* <Task1 student={student} /> */
11      <Car car={car} />
12    </>
13  )
14 }
15
16 export default App
17
18
```

```
App.jsx Car.jsx first-project Task1.jsx
first-project > src > Component > Car.jsx > Car
1 import React from 'react'
2 import car from '../assets/camry.avif'
3
4 function Car({ car }) {
5   return (
6     <div>
7       <h2>{car.year} {car.make} {car.model}</h2>
8       <p>Color: {car.color}</p>
9       <img src = {car.picture} style={{ width: "300px", height: "200px" }} />
10     </div>
11   )
12 }
13
14 export default Car
15
```

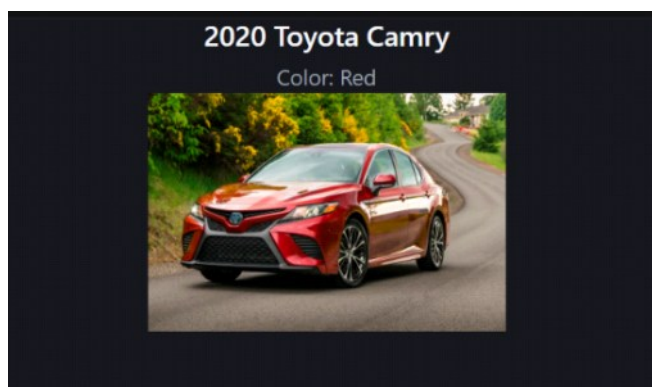

THE OTHER WAY:

```

first-project > src > App.jsx > ...
1  import './App.css'
2  import Car from './Component/Car'
3
4  function App() {
5    //const student = { name: "James", id: "WIPRO7839A2", dept: "Global IT Infrastructure" };
6    //const car = { make: "Toyota", model: "Camry", year: 2020, color: "Red", picture: camry };
7    return (
8      <>
9        /* <Task1 student={student} /> */
10       <Car />
11     </>
12   )
13 }
14
15
16 export default App
17

```

```

first-project > src > Component > Car.jsx > Car
1  import React from 'react'
2  import camry from '../assets/camry.avif'
3
4  function Car() {
5    const car= {name: "wagonR", model: "2018", color: "white", picture: camry}
6    return (
7      <div>
8        <h2>{car.name} {car.model}</h2>
9        <p>Color: {car.color}</p>
10       <img src = {car.picture} width="300px" height="200px" />
11     </div>
12   )
13 }
14
15 export default Car
16

```

(THE SAME OUTPUT OBV)

NOTE: THE .JS FILE AND .JSX FILE SHOULD BE NAMED DIFFERENTLY EVEN WHEN THE CASES ARE DIFFERENT.

TO PRINT IMAGES IN AN ARRAY:

```


first-project > src > App.jsx > ...
1  import React from 'react'
2  import './App.css';
3  import Bikes from './Component/bikes';
4  function App() {
5    return (
6      <div>
7        <Bikes/>
8      </div>
9    )
10 }
11
12 export default App
13

```

```


first-project > src > Component > Bikes.jsx > Bikes
1  import React from "react";
2  import bike from "./bike";
3
4  export default function Bikes() {
5    return (
6      <div>
7        {bike.map((b, index) => (
8          <div key={index}>
9            <h2>
10              {b.name} {b.model}
11            </h2>
12
13            <p>Color: {b.color}</p>
14
15            <img
16              src={b.url}
17              alt={b.name}
18              width="300px"
19              height="200px"
20            />
21          </div>
22        ))}
23      </div>
24    );

```

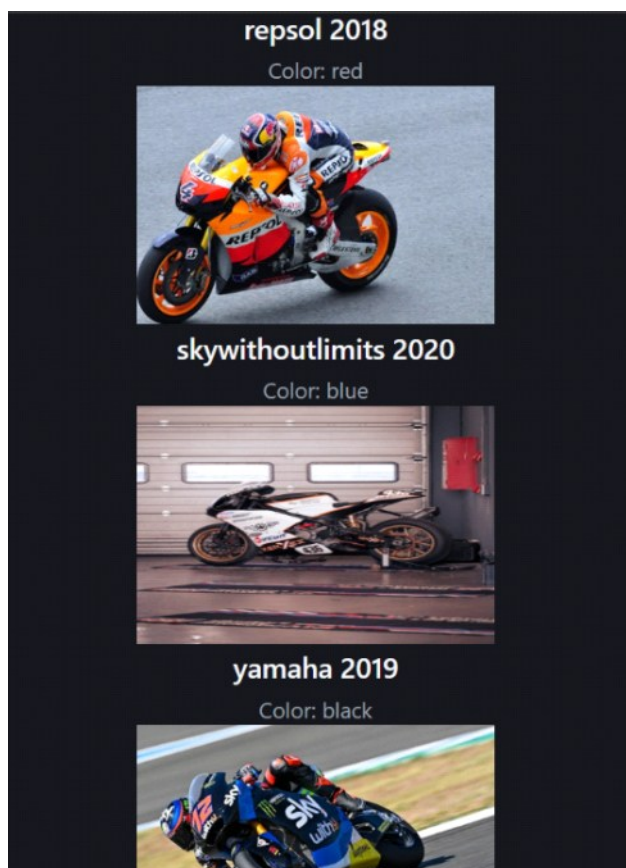


IMPLEMENTING A TEXTBOX:

```
first-project > src > Component > College.jsx > College
1  import React, { useState } from 'react'
2
3  export default function College() {
4    const [name, setName] = useState("KCE")
5    return (
6      <div>
7        <input type="text" onChange={(e) => setName(e.target.value)} />
8        <h1>College: {name}</h1>
9      </div>
10   )
11 }
12
13
```

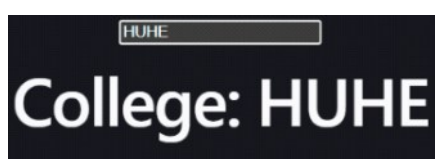


TO INCREMENT AND DECREMENT USING A BUTTON (ACTUALLY TWO):

```
first-project > src > Component > Count.jsx > Count
1  import React, { useState } from 'react'
2
3  function Count() {
4    const [count, setCount] = useState(0)
5
6    return (
7      <div>
8        <p>You clicked {count} times</p>
9        <button onClick={() => setCount(count + 1)}>
10         Click me
11       </button>
12       <button onClick={() => setCount(count - 1)}>
13         Decrease
14       </button>
15       <input type="reset" onClick={() => setCount(0)} />
16     </div>
17   )
18 }
19
20 export default Count
21
```



TO SHOW AND HIDE:

```
first-project > src > Component > Toggle.jsx > Toggle
1  import React, { useState } from 'react'
2
3  function Toggle() {
4    const [show, setShow] = useState(true)
5    return (
6      <div>
7        <button onClick={() => setShow(!show)}>
8          {show ? 'Hide' : 'Show'}
9        </button>
10       {show && <p>This is some content that can be toggled.</p>}
11     </div>
12   )
13 }
14
15 export default Toggle
16
```



DARK MODE/ LIGHT MODE:

```
first-project > src > Component > Mode.jsx > Mode > backgroundColor
1  import React, { useState } from 'react'
2
3  function Mode() {
4    const [dark, setDark] = useState(false)
5    return (
6      <div style={{ backgroundColor: dark ? 'darkGray' : 'white', color: dark ? 'white' : 'black', height: '100vh' }}>
7        <button onClick={() => setDark(!dark)}>
8          {dark ? 'Switch to Light Mode' : 'Switch to Dark Mode'}
9        </button>
10      </div>
11    )
12  }
13
14 export default Mode
15
```



FETCH THIRD PARTY API IN REACT:

```

first-project > src > Component > Users.jsx > Users
1  import React, { use, useState, useEffect } from 'react'
2
3  function Users() {
4    const [user, setUser] = useState({})
5    useEffect(() => {
6      fetch("https://jsonplaceholder.typicode.com/users")
7        .then(response => response.json())
8        .then(data => setUser(data))
9    }, [])
10   return (
11     <div>
12       {user.map((u) => (
13         <div key={u.id}>
14           <h3>{u.name}</h3>
15           <p>{u.email}</p>
16         </div>
17       ))}
18     </div>
19   )
20 }
21
22 export default Users
23

```

Leanne Graham

Sincere@april.biz

Ervin Howell

Shanna@melissa.tv

Clementine Bauch

Nathan@yesenia.net

Patricia Lebsack

Julianne.OConner@kory.org

Chelsey Dietrich