

DAY 2 - PLACEMENT

19 May 2026 09:36 AM

DATA TYPES:

LET - LOCAL SCOPE

VAR - CAN BE REDECLARED


CONST - VALUE CANNOT BE CHANGED

TO DISPLAY A MESSAGE DUE TIME: </Component/Welcome.jsx/>

```
first-project > src > Component > Welcome.jsx > Welcome > backgroundColor
1  import React from 'react'
2
3  function Welcome() {
4    const hour=new Date().getHours();
5    const greet=hour<12?"Good Morning":hour<18?"Good Afternoon":hour<21?"Good Evening":"Good";
6    return (
7      <div style = {{color:"red", fontSize:"24px", backgroundColor:"lightgreen"}}>Hello, {greet}</div>
8    )
9  }
10
11  export default Welcome
12
```

<app.jsx>

```
first-project > src > App.jsx > default
1  import './App.css'
2  import Welcome from './Component/Welcome'
3
4  function App() {
5
6
7    return (
8      <>
9        <Welcome />
10      </>
11    )
12  }
13
14  export default App
15
```

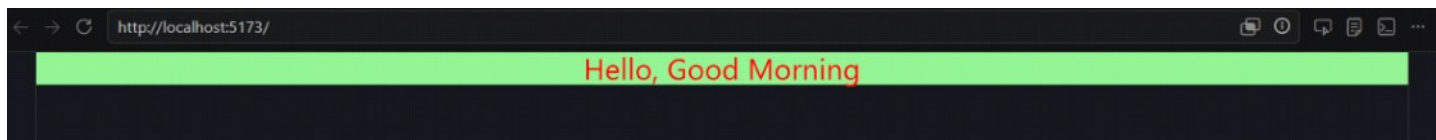

USING PROPS:


INSTEAD OF PASSING EACH VARIABLE NAME TO THE STUDENT FUNCTION, WE CAN ADD "PROPS" TO MAINTAIN A PROPER CODE OF CONDUCT.

```
first-project > src > Component > Student.jsx > ...
1  import React from 'react'
2
3  function Student(props) {
4    return (
5      <div>
6        <p>Name: {props.name}</p>
7        <p>Age: {props.age}</p>
8      </div>
9    )
10  }
11
12  export default Student
13
```

TO CREATE AN ARRAY AND TO PRINT THEM SEPARATELY USING ANOTHER COMPONENT:

```
App.jsx Course.jsx X Student.jsx first-project
first-project > src > Component > Course.jsx > Course > courses.map() callback
1 import React from 'react'
2
3 export default function Course({ courses }) {
4   return (
5     <div>
6       {courses.map((course, index) => {
7         <p key={index}>{course}</p>
8       })}
9     </div>
10  )
11 }
12
13
```

```
App.jsx X Course.jsx Student.jsx first-project
first-project > src > App.jsx > ...
1 import './App.css'
2 import Welcome from './Component/Welcome'
3 import Student from './Component/Student'
4 import Course from './Component/Course'
5
6 function App() {
7   const student = { name: "John Doe", age: 20 };
8   const courses = ["Math", "Science", "History"];
9   return (
10     <>
11       <Welcome />
12       <Student student={student} />
13       <Course courses={courses} />
14     </>
15   )
16 }
17
18 export default App
19
```

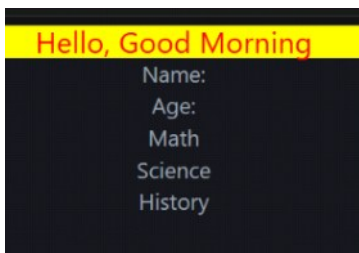

FOR ARROW FUNCTION: NO FUNCTION KEYWORD, NO NAME, JUST ARGUMENT IS PASSED