

# When Should LLM Judges Abstain? Multi-View Protocol Instability as a Per-Instance Signal for Selective LLM Judging

Anonymous submission

## Abstract

Large language models are increasingly used as automated judges to evaluate generated text, yet these judges are prone to overconfidence, positional bias, and sensitivity to evaluation-protocol wording. We propose **CARE-Judge** (Calibrated, Abstaining, and Robust Evaluation), a selective evaluation framework that determines *when* an LLM judge’s verdict should be trusted. Our insight is *protocol-stability* used as an asymmetric signal: when a judge’s verdict changes under semantically equivalent evaluation protocols—rubric paraphrases, response-order permutations, and stochastic resampling—the verdict is often unreliable, whereas stability alone is *not* evidence of correctness, since a judge can be stably wrong. CARE-Judge fuses these protocol-stability features into a learned correctness calibrator and pairs it with an inherited empirical selective-risk procedure (a held-out calibration threshold certified by an exact Clopper–Pearson bound, validated by measured risk-violation rates rather than a new theorem). Across three judge models (Qwen2.5-1.5B, DeepSeek-V4, GPT-5.5) and four benchmarks (JudgeBench, TL;DR, RewardBench, LMArena) totaling over 26,000 pairwise evaluations, protocol-stability signals separate correct from incorrect verdicts by up to 27 percentage points for mid-capability judges. At a matched six-call budget the fused calibrator attains the highest AUROC on every one of the eight DeepSeek/GPT-5.5 benchmark pairs, beating base confidence, self-consistency, rubric, the SCOPE-style bidirectional signal, and a Trust-or-Escalate agreement baseline; on GPT-5.5 it reaches AUROC 0.85–0.99, and on the mid-capability DeepSeek-V4 fusion adds up to +7.3pp over the best single signal. It accepts 82% of GPT-5.5’s RewardBench verdicts at 88% accuracy (raw 71%) and 100% of DeepSeek’s at 93%. Critically, when the judge is near-random (Qwen-1.5B, 49% on JudgeBench) 65% of its errors are stable-but-wrong and CARE-Judge abstains entirely—a boundary condition we treat as a finding rather than a success.

## 1 Introduction

Large language models (LLMs) are now widely deployed as automated judges—scoring RLHF outputs (Ouyang et al. 2022), ranking chatbot responses (Zheng et al. 2023), and

This is an anonymized submission for review purposes only. Distribution, citation, or public sharing of this manuscript is strictly prohibited. Copyright and publication details will appear in the final version if accepted.

evaluating generation quality—but they make systematic errors, exhibit positional biases, and vary verdicts based on evaluation-protocol wording, all while expressing high confidence (Li et al. 2024; Wang et al. 2023; Wei et al. 2024).

Prior work has established that LLM judges are overconfident and has begun to control this risk explicitly. Jung, Brahman, and Choi (2025) showed that standard confidence measures (predictive probability, verbalized confidence) poorly predict whether a judge’s verdict agrees with human annotators, and proposed *Simulated Annotators* with cascaded selective evaluation to provide provable human-agreement guarantees; Badshah, Emami, and Sajjad (2026) instead aggregate both response orderings into a permutation-invariant conformal score. These methods each rely on a *single* confidence source—simulated-annotator agreement or bidirectional preference probability—and do not exploit the broader observation that sensitivity across *multiple* semantically equivalent evaluation protocols is itself an error signal. We build directly on their selective-risk machinery (a held-out calibration threshold with an exact Clopper–Pearson bound) and do not claim it as a contribution; our contribution is the confidence signal that machinery is applied to. We are careful *not* to over-claim its formal guarantees: because our acceptance threshold is chosen data-dependently on the calibration split, we treat the risk criterion as an empirical target validated by measured violation rates, not as a family-wise-corrected sequential test.

We investigate a complementary and deliberately asymmetric hypothesis: **a judgment that is unstable under semantically equivalent evaluation protocols is often unreliable, whereas stability alone is not sufficient evidence of correctness.** Concretely, if an LLM judge produces different rankings when (i) the rubric is paraphrased, (ii) the response order is swapped, or (iii) the judgment is re-sampled at nonzero temperature, the resulting verdict is less trustworthy. The converse does not hold: a judge can be stably wrong, applying the same erroneous heuristic (e.g., a length or fluency preference) under every protocol variant (Xu et al. 2026). We call this property *protocol stability*, and we show that protocol *instability* is a useful sufficient warning signal in competence regimes where the judge is at least moderately accurate—and we characterize precisely where it fails.

We organize our study around three questions: (*RQ1*) does per-instance protocol stability predict judge error?

(RQ2) does fusing protocol-stability signals improve the risk-coverage tradeoff over standard confidence and single-signal baselines at a matched budget? (RQ3) in which capability and task regimes do these signals help, and where do they break down?

Building on this insight, we introduce **CARE-Judge** (Calibrated, Abstaining, and Robust Evaluation), which (i) collects multi-signal protocol-stability features—rubric perturbation, position-swap consistency, and stochastic self-consistency—for each pairwise judgment; (ii) learns a correctness calibrator  $\hat{p}(\text{correct} \mid \text{features})$  on a training split; (iii) selects an acceptance threshold on a disjoint calibration split by an empirical prefix search certified with an exact Clopper-Pearson bound (Jung, Brahman, and Choi 2025; Clopper and Pearson 1934); and (iv) reports selective risk, coverage, and empirical risk-violation rates on a held-out test split.

We validate CARE-Judge across three judge models spanning a wide capability range (Qwen2.5-1.5B, DeepSeek-V4, GPT-5.5) and four benchmarks covering objective correctness (JudgeBench (Tan et al. 2024)), reward-model preference (RewardBench (Lambert et al. 2024)), summarization preference (TL;DR (Stiennon et al. 2020)), and open-ended human preference (LMArena (Zheng et al. 2023)), totaling over 26,000 pairwise evaluations. Our experiments answer the three research questions as follows:

- **(RQ1) Protocol instability predicts judge error.** Rubric perturbation and position-swap consistency produce accuracy gaps of up to 27 percentage points (e.g. +27.4pp on DeepSeek/RewardBench) between stable and unstable subsets, consistently across datasets where the judge is at least moderately accurate ( $\geq 60\%$ ). Where the judge is near chance, the same signals lose their predictive sign.
- **(RQ2) Multi-view fusion improves risk-coverage.** At a matched six-call budget, the fused calibrator attains the best or tied-best AUROC in 9 of 12 judge-dataset pairs, beating base confidence, self-consistency, rubric stability, the SCOPE-style bidirectional signal, and a Trust-or-Escalate agreement baseline; e.g., on DeepSeek/TL;DR it lifts pooled accepted accuracy from 67.9% to 84.1% under a 15% risk budget, and adds up to +7.3pp AUROC over the best single signal on DeepSeek-V4.
- **(RQ3) Stability is not correctness.** When Qwen2.5-1.5B (49.4% on JudgeBench) judges, its verdicts are *stable but wrong*: the signals reverse sign and CARE-Judge abstains on the whole set. We treat this as evidence that protocol stability requires a minimum judge competence, not as a headline success.

Our contributions are:

1. **Decision-oriented multi-view instability signal.** We fuse three families of protocol-perturbation instability—rubric paraphrase, response permutation, and stochastic resampling—into a *single per-instance accept/abstain decision under an explicit risk budget*. Prompt- and order-sensitivity have been studied before as *diagnostic* properties (Hua et al. 2025; Guan et al. 2025; Anghel et al. 2025a; Huang, Sun, and Yang 2026), and individual consistency signals have been used to *rank* or ensemble

judges (Li et al. 2025b; Gupta and Kumar 2026); our contribution is neither observing protocol sensitivity nor a single consistency check, but combining all three perturbation families into one calibrated, risk-controlled acceptance rule (Section 3).

2. **Competence-gated asymmetry.** We establish—and quantify—that protocol instability predicts error only above a judge-competence threshold, and that below it the signal *inverts*: a near-random judge produces stable-but-wrong verdicts (Section 4.4). To our knowledge this competence-gated asymmetry has not been characterized in prior per-instance judge-reliability work.
3. **Fusion and risk-coverage characterization.** We show that fusing the signals ranks correct versus incorrect verdicts better than standard confidence, single-signal baselines, and ensemble aggregation at a matched inference budget (Section 4), and map where the approach yields useful coverage versus where it must abstain.

We do not claim the risk-control machinery as novel; it is adopted from prior selective-judging work (Jung, Brahman, and Choi 2025; Badshah, Emami, and Sajjad 2026). Code and data will be released upon acceptance.

## 2 Related Work

**LLM-as-a-Judge.** The use of LLMs as automated evaluators has grown rapidly. Zheng et al. (2023) introduced Chatbot Arena and MT-Bench, establishing pairwise LLM judging as a scalable evaluation paradigm. Li et al. (2024) provided a comprehensive survey of LLM-based evaluation methods, identifying biases including position bias, length bias, and self-enhancement bias. Wang et al. (2023) proposed mitigating position bias via multi-turn debate and swap-and-compare. Wei et al. (2024) systematically evaluated LLM-as-a-judge prompt sensitivity, finding that rubric template diversity affects alignment scores. Recent work also cautions that surface agreement need not reflect substantive quality: Xu et al. (2026) give a mechanistic-interpretability account showing that judge biases arise from shared internal heuristics, which directly motivates our position that stability is a warning signal but not a correctness guarantee. Li et al. (2025a) further document preference leakage as a contamination mode in LLM-as-a-judge pipelines, underscoring the need for strictly disjoint data splits when calibrating any judge-reliability estimator.

**Prompt-Sensitivity, Consistency, and Per-Instance Judge Reliability.** A growing body of work studies how LLM outputs shift under semantically equivalent prompt, rubric, or ordering perturbations, and how such shifts bear on *per-instance* reliability. Hua et al. (2025) ask whether paraphrase sensitivity is a flaw or an artifact; Guan et al. (2025) isolate the input-order effect; Anghel et al. (2025a) build a pairwise meta-evaluator diagnosing judge instability; and Huang, Sun, and Yang (2026) use prompt perturbation to stabilize pairwise evaluation. Closer to the per-instance regime, Gupta and Kumar (2026) diagnose judge reliability with conformal prediction sets, Choi et al. (2026) apply item-response theory, and Li et al. (2025b) ensemble prompt variants to raise accuracy. Ling et al. (2025) caution that abstention can itself be a

prompt artifact—a caveat we address via competence-gating (Section 4.4).

We do *not* claim to be the first to observe protocol sensitivity or to use a consistency signal; we differ in *use* and *scope*. In use, prior work diagnoses judges globally (Hua et al. 2025; Guan et al. 2025; Anghel et al. 2025a), builds per-instance reliability *sets* for analysis (Gupta and Kumar 2026; Choi et al. 2026), or ensembles prompts to *improve accuracy* (Li et al. 2025b; Huang, Sun, and Yang 2026); we instead fuse three perturbation families into a single calibrated accept/abstain decision under an explicit risk budget. In scope, none characterizes the competence-gated asymmetry we report—instability predicts error above a competence threshold and inverts below it.

**Selective Prediction and Abstention.** Selective classification (Geifman and El-Yaniv 2017; El-Yaniv and Wiener 2010) enables a predictor to abstain on uncertain inputs. Wen et al. (2025) surveyed abstention in LLMs, covering verbalized confidence, self-consistency, and retrieval-based approaches. Krishnan, Khanna, and Tickoo (2024) proposed uncertainty-calibrated fine-tuning for LLM trust, using last-layer hidden states. Our work differs by focusing on *evaluation-protocol stability* as the uncertainty source, which is specific to the judging task and does not require model internals.

**Risk-Controlled Selective Judging.** Our work is most closely related to a recent line of risk-controlled selective LLM judging, and we are explicit that the statistical control machinery we use is adopted from, not invented by, this work. Jung, Brahman, and Choi (2025) (Trust-or-Escalate) proposed cascaded selective evaluation for LLM judges with human-agreement guarantees, using Simulated Annotators as the confidence source together with confidence-threshold calibration and Clopper–Pearson risk control. Concurrently, Badshah, Emami, and Sajjad (2026) (SCOPE) proposed selective conformal pairwise judging, aggregating the probabilities of both response orderings into a permutation-invariant score and deriving risk–coverage guarantees on benchmarks including MT-Bench. Sheng et al. (2025) likewise applied conformal prediction to quantify LLM-as-a-judge uncertainty through interval evaluations. CARE-Judge uses a comparable selective-risk apparatus—selecting an acceptance threshold on a held-out calibration split via an exact Clopper–Pearson upper bound—rather than proposing new statistical guarantees; we treat this apparatus as an inherited component and are careful (Section 3) to describe exactly the empirical, calibration-conditional form of risk control we use. Our contribution is orthogonal and lies in the *confidence signal*: whereas Trust-or-Escalate relies on simulated-annotator agreement and SCOPE on bidirectional preference probability alone, we combine rubric-paraphrase instability, position-swap inconsistency, and stochastic self-consistency into a single learned calibrator, and we characterize the judge-capability regimes in which such protocol-stability signals help or fail. Because SCOPE isolates permutation invariance while CARE-Judge treats position inconsistency as one diagnostic feature among several, the two are complementary; we position CARE-Judge as a multi-view generalization rather than a competitor to any single signal.

**Judge Benchmarks.** Tan et al. (2024) introduced JudgeBench, a benchmark of challenging response pairs with objective correctness labels across knowledge, reasoning, math, and coding. Lambert et al. (2024) proposed RewardBench for evaluating reward models. We use JudgeBench and RewardBench as hard, objectively-labeled benchmarks and TL;DR (Stiennon et al. 2020) and LMArena (Zheng et al. 2023) as subjective-preference benchmarks, covering both correctness and preference evaluation.

**Rubric-Based Evaluation.** Hong et al. (2026) studied aligning LLM judges with human scoring rubrics. Anghel et al. (2025b) proposed a rubric-driven multi-metric evaluation framework. These works treat rubrics as fixed evaluation criteria to be aligned with; in contrast, we treat *rubric sensitivity*—the degree to which a judge’s verdict changes under semantically equivalent rubric paraphrases—as an uncertainty signal. While prompt-perturbation consistency has been examined as a general reliability property, we are not aware of prior work that uses rubric-paraphrase instability specifically as a per-instance acceptance signal within a risk-controlled selective-judging framework; we frame this narrower claim as our contribution and validate it empirically.

**Cost-Aware Cascades.** Routing easy queries to cheap models and escalating hard ones is a well-established cost-reduction strategy; Zellinger, Liu, and Thomson (2025) study LLM cascades with early abstention and formal cost analysis. Our cascade experiment (Appendix) applies the same idea to judge routing, but we treat it as an exploratory application of protocol-stability confidence rather than a core contribution, and we defer a formal cascade-level guarantee to future work.

### 3 Method

CARE-Judge converts an LLM judge  $f$  into a *selective evaluator*  $(\hat{f}, \hat{c})$  that either outputs a judgment  $\hat{f}(x)$  or abstains, based on a confidence measure  $\hat{c}(x)$  and a risk-controlled threshold  $\hat{\lambda}$ . The framework has three components: (1) multi-signal protocol-stability feature extraction, (2) learned correctness calibration, and (3) empirical risk-controlled threshold selection with an exact Clopper–Pearson bound, validated by measured risk-violation rates rather than a new finite-sample theorem.

#### 3.1 Protocol-Stability Features

Given a pairwise evaluation item  $x = (q, a_1, a_2)$  consisting of a prompt  $q$  and two candidate responses, we issue multiple judge calls under semantically equivalent evaluation protocols and measure the stability of the resulting verdicts. Let  $f(x; r, \tau)$  denote the judge’s output (winner  $\in \{A, B\}$  and confidence  $\in [0, 1]$ ) given rubric  $r$  and sampling temperature  $\tau$ .

**Rubric Perturbation Stability.** We define a set of  $K = 3$  semantically equivalent rubric variants  $\{r_1, \dots, r_K\}$  that are intended to express the same evaluation criteria in different wording (e.g., “Prefer the more correct response” vs. “Choose the answer a careful evaluator would prefer”); all variants are

listed verbatim in the Appendix. For each item, we collect verdicts  $\{v_1, \dots, v_K\}$  where  $v_k = f(x; r_k, 0)$ . We compute:

$$\text{rubric\_vote\_share} = \max_{w \in \{A, B\}} \frac{|\{k : v_k = w\}|}{K}, \quad (1)$$

$$\text{rubric\_flip} = \mathbb{I}[|\{v_1, \dots, v_K\}| > 1], \quad (2)$$

where  $\text{rubric\_flip} = 1$  if any rubric variant produces a different winner. The intuition is that a verdict that changes under paraphrase is *protocol-dependent* and not robust to the stated specification. We avoid the stronger claim that it is “content-irrelevant,” since a paraphrase can also shift the weight a judge places on competing criteria; a negative-control experiment with intentionally non-equivalent rubrics (Appendix B) separates wording from criterion perturbation.

**Position-Swap Consistency.** We judge the item in both response orderings:  $(q, a_1, a_2)$  and  $(q, a_2, a_1)$ . Let  $v_{\text{orig}} = f(x; r_1, 0)$  and  $v_{\text{swap}} = f(\text{swap}(x); r_1, 0)$ , where  $\text{swap}$  reverses the response order. We map  $v_{\text{swap}}$  back to the original coordinate system and compute:

$$\text{swap\_consistency} = \mathbb{I}[\text{map}(v_{\text{swap}}) = v_{\text{orig}}]. \quad (3)$$

This probes positional bias: a judge that reverses its verdict under response reordering is unreliable.

**Self-Consistency.** We form a set of  $S$  judgments under the base rubric that pools the deterministic base verdict ( $\tau=0$ ) with  $S-1$  stochastic re-samples at temperature  $\tau > 0$ , and compute the majority vote share:

$$\text{self\_vote\_share} = \max_w \frac{|\{s : f(x; r_1, \tau_s) = w\}|}{S}. \quad (4)$$

In all reported experiments  $S = 3$  (one  $\tau=0$  base verdict and two  $\tau=0.7$  samples), so the score is genuinely informative rather than degenerate. An optional *adaptive-k* early-stopping rule ( $\text{self\_vote\_share} \geq \tau_{\text{stop}}$  after a minimum of two samples) is available to reduce cost but was disabled in the main experiments.

**Feature Vector.** CARE-Judge uses six raw judge calls per item—one base ( $\tau=0$ ), two self-consistency samples ( $\tau=0.7$ ), one position swap, and two additional rubric paraphrases (the base rubric doubling as the third rubric verdict)—and forms a 14-dimensional feature vector grouped into three families,

$$\begin{aligned} \phi(x) = [ & \underbrace{\text{swap\_consistency, swap\_conf\_gap}}_{\text{protocol: position}}, \\ & \underbrace{\text{rubric\_vote\_share, rubric\_entropy, rubric\_flip}}_{\text{protocol: rubric}}, \\ & \underbrace{\text{self\_vote\_share, self\_entropy}}_{\text{protocol: self-consistency}}, \\ & \underbrace{\text{base\_conf, mean\_conf, std\_conf}}_{\text{confidence}}, \\ & \underbrace{\text{length\_gap, score\_margin}}_{\text{length}} ]. \end{aligned} \quad (5)$$

The three protocol-stability families (position, rubric, self-consistency) constitute the paper’s contributed signal; the confidence and length families are standard baselines included so the learned calibrator can exploit them where informative. We deliberately *exclude* the simulated-annotator signal from the main feature vector: reproducing Trust-or-Escalate’s few-shot personas is orthogonal to our hypothesis, and including a disabled ( $N=0$ ) constant feature would only add a spurious degree of freedom to the calibrator. We instead report a dedicated simulated-annotator baseline (Trust-or-Escalate) in the head-to-head comparison (Section 4.3), and a leakage-controlled construction (demonstrations drawn only from  $D_{\text{train}}$ , never  $D_{\text{cal}}$ ) is described in Appendix B for completeness.

### 3.2 Correctness Calibration

We fit a calibrator  $\hat{p} : \mathbb{R}^d \rightarrow [0, 1]$  that predicts the probability that the judge’s verdict is correct given the feature vector:

$$\hat{p}(x) = P(\hat{f}(x) = y \mid \phi(x)), \quad (6)$$

where  $y$  is the reference label. We support logistic regression, isotonic regression, and gradient-boosted classifiers. The calibrator is fit on a *training split*  $D_{\text{train}}$  that is disjoint from both the threshold-selection set and the evaluation set.

### 3.3 Empirical Risk-Targeted Threshold Calibration

Given a user-specified risk tolerance  $\alpha \in (0, 1)$  and error level  $\delta \in (0, 1)$ , our goal is to select an acceptance threshold  $\hat{\lambda}$  on a *calibration split*  $D_{\text{cal}}$  (disjoint from  $D_{\text{train}}$ ) that targets the calibration-conditional risk criterion

$$P(P(\hat{f}(x) \neq y \mid \hat{c}(x) \geq \hat{\lambda}) \leq \alpha) \geq 1 - \delta, \quad (7)$$

where the outer probability is over the calibration draw. We select  $\hat{\lambda}$  by an *empirical prefix search*: we sort the calibration items by descending confidence and, among prefixes of size at least a minimum-acceptance floor  $m$ , choose the largest accepted prefix whose  $(1-\delta)$  upper confidence bound on the accepted-set error rate is at most  $\alpha$ ; the threshold is the confidence of the last accepted item. We do not claim this adaptive search realizes exact family-wise error control in the sense of a pre-registered fixed-sequence test—because the acceptance set is chosen data-dependently, it involves an implicit multiplicity that we do not formally correct. We therefore treat Eq. (7) as the design target of the procedure and validate risk control *empirically*, reporting the realized violation frequency  $\text{Pr}_{\text{seed}}(\hat{R}_{\text{test}} > \alpha)$  over many held-out splits (Section 4, Appendix B). We use the *exact* one-sided Clopper–Pearson upper bound (Clopper and Pearson 1934):

$$\text{CP}_{\text{upper}}(e, n, \delta) = \sup\{p : P(\text{Bin}(n, p) \leq e) \geq \delta\}, \quad (8)$$

where  $e$  is the number of errors among the  $n$  accepted calibration items, computed via bisection on the binomial CDF. Algorithm 1 states the complete train/calibrate/test procedure, including the minimum-acceptance floor  $m$  that prevents certifying a threshold on too few calibration points.

---

**Algorithm 1** CARE-Judge selective evaluation

---

```
1: Input: labeled items  $D$ ; risk  $\alpha$ , level  $\delta$ ; min-accept  $m$ 
2: Split  $D$  into disjoint  $D_{\text{train}}, D_{\text{cal}}, D_{\text{test}}$  (40/30/30)
3: Fit calibrator  $\hat{p}$  on  $\{(\phi(x), \mathbb{I}[\hat{f}(x)=y])\}_{x \in D_{\text{train}}}$ 
4: Sort  $D_{\text{cal}}$  by  $\hat{p}$  descending:  $c_{(1)} \geq \dots \geq c_{(n)}$ 
5:  $\hat{\lambda} \leftarrow \infty$  {accept nothing by default}
6: for  $i = m$  to  $n$  do
7:    $e_i \leftarrow \#\{j \leq i : \hat{f}(x_{(j)}) \neq y_{(j)}\}$  {errors in top- $i$  prefix}
8:   if  $\text{CP}_{\text{upper}}(e_i, i, \delta) \leq \alpha$  then
9:      $\hat{\lambda} \leftarrow \hat{p}(x_{(i)})$  {largest certified prefix so far}
10:  end if
11: end for
12: Output: on  $D_{\text{test}}$ , accept  $x$  iff  $\hat{p}(x) \geq \hat{\lambda}$ , else abstain
13: Report: empirical violation rate  $\text{Pr}_{\text{seed}}(\hat{R}_{\text{test}} > \alpha)$  over splits
```

---

The selective evaluator is then applied to a *held-out test split*  $D_{\text{test}}$ :

$$(\hat{f}, \hat{c})(x) = \begin{cases} \hat{f}(x) & \text{if } \hat{c}(x) \geq \hat{\lambda}, \\ \emptyset & \text{otherwise (abstain).} \end{cases} \quad (9)$$

All reported metrics (coverage, selective risk, accepted accuracy, calibration error) are measured on the held-out  $D_{\text{test}}$ , and the empirical risk-violation rate over many splits is our primary evidence that the target of Eq. (7) is met in practice.

### 3.4 Cost-Aware Cascade (Exploratory)

As an application, we arrange multiple judges  $\mathcal{M} = (M_1, \dots, M_T)$  in order of increasing cost. Each tier  $t$  has its own calibrator  $\hat{p}_t$  and threshold  $\hat{\lambda}_t$ ; an item is evaluated by  $M_1$  and accepted if  $\hat{p}_1(x) \geq \hat{\lambda}_1$ , otherwise escalated to  $M_2$ , and so on, abstaining if no tier accepts. To keep per-tier risk control meaningful, we calibrate each tier *conditionally*: tier  $t$ 's threshold is selected on the subset of  $D_{\text{cal}}$  that was rejected by tiers  $1:t-1$ , i.e. on the distribution of items that actually reach  $M_t$  at deployment, and we split the error budget as  $\delta_t = \delta/T$  so that a union bound caps the probability that any tier's calibration draw fails at  $\delta$ . Because the per-tier threshold search is the same empirical procedure as above (not a formally corrected sequential test), we again validate the cascade empirically and present it only as an exploratory application (Appendix C); a formal deployment-time cascade theorem is future work.

## 4 Experiments

### 4.1 Experimental Setup

**Datasets.** We evaluate on four benchmarks spanning objective correctness and subjective preference:

- **JudgeBench** (Tan et al. 2024): 620 pairwise comparisons with objective correctness labels across knowledge, reasoning, math, and coding.

- **TL;DR** (Stiennon et al. 2020): 2,000 pairwise summarization preference comparisons sampled from the OpenAI summarization feedback dataset (176,641 available pairs).
- **RewardBench** (Lambert et al. 2024): 2,000 chosen/rejected pairs across chat, safety, and reasoning subsets.
- **LMarena** (Zheng et al. 2023): 2,000 human preference pairs from the Chatbot Arena, excluding ties.

We deliberately scale each subjective benchmark to 2,000 pairs so that the 40/30/30 split yields calibration and test folds of several hundred items, giving the exact Clopper–Pearson bound enough samples to certify nonzero coverage. All four benchmarks are used under their original public licenses (JudgeBench and RewardBench under their respective research licenses; TL;DR from the OpenAI summarization-feedback release; LMarena/Chatbot Arena human-preference data), and we redistribute only derived feature traces, not raw source text, in the code archive.

**Judge Models.** We use five judge models. Two are strong API models spanning the mid-to-frontier range: **DeepSeek-V4** in its non-thinking `deepseek-chat` mode (mid-capability; we deliberately avoid the reasoning `v4-pro` mode, which is too token-intensive for six-call feature collection) and **GPT-5.5** (frontier, default reasoning effort, OpenAI-compatible endpoint). The other three form a *controlled capability ladder*—**Qwen2.5-1.5B / 7B / 14B-Instruct**—from the same model family, so that training recipe, tokenizer, and prompt format are held fixed and only parameter count varies. This ladder directly disentangles *capability* from *size*: because the three Qwen judges differ *only* in scale, a monotone trend of fused AUROC across them isolates a size-driven capability effect, complementing the broader (but confounded) API-vs-open comparison. Base confidence is the model's verbalized confidence, since token log-probabilities are not exposed by all endpoints. Exact model snapshots, version dates, decoding temperatures, prompts, and invalid-output handling are given in Appendix B. (We also attempted GLM-5.2, but it behaves as a slow reasoning model on the available endpoint—hundreds of thinking tokens per call—so we omit it from the main comparison.)

**Feature Collection.** For each item we issue six judge calls: one base judgment ( $\tau=0$ ), two self-consistency samples ( $\tau=0.7$ ; pooled with the base verdict to form  $S=3$ ), one position-swap judgment, and two additional rubric paraphrases (the base rubric serving as the third of  $K=3$  rubric verdicts). The optional simulated-annotator signal is disabled here ( $N=0$ ); we report it separately in a matched-budget comparison (Section 4.3). *Ties, invalid outputs, and labels.* A judge output that cannot be parsed as *A/B* is retried once; if it still fails we record it as an explicit `invalid` state and treat that call as an *abstention-inducing* disagreement (it lowers, never inflates, the corresponding stability signal). Invalid rates are below 3% for every judge–benchmark pair (Appendix B). For the preference benchmarks (TL;DR, LMarena) we drop ties and evaluate selective risk against the

majority human label; JudgeBench and RewardBench carry objective correct/incorrect labels.

**Evaluation Protocol.** The main results (Tables 1–2) use a strict three-way disjoint split: 40% train (fit calibrator), 30% calibration (select threshold), 30% held-out test (report all metrics), averaged over multiple random seeds with  $\alpha=0.15$ ,  $\delta=0.10$  and the exact Clopper–Pearson bound. The cascade and transfer analyses (Appendix) use the same strict three-way split with per-tier conditional calibration and a union-bound error budget.

**Baselines and matched budget.** We compare *Raw* (accept all, no abstention); *CARE-Judge* (logistic fusion of all protocol-stability features); the single-signal baselines *base-confidence*, *rubric*, *swap* (a budget-matched reimplementa-tion of the SCOPE bidirectional-consistency signal (Badshah, Emami, and Sajjad 2026)), and *self*; *best single signal* (oracle selection of the best signal on train); and a budget-matched reimplementa-tion of Trust-or-Escalate simulated-annotator agreement (Jung, Brahman, and Choi 2025). All methods consume the *same* six-call budget, so the head-to-head in Table 3 is fully budget-matched.

## 4.2 Main Results

Table 1 presents the main held-out results across all model–dataset combinations.

**Finding 1 (RQ1): Protocol instability predicts judge error for mid-capability judges.** For DeepSeek-V4—a mid-capability judge whose verdicts flip on 6–20% of items—rubric perturbation and position-swap inconsistency cleanly separate lower-accuracy subsets on all four benchmarks (Appendix F, Figure 2). The largest gap is on RewardBench: rubric-stable verdicts reach 93.7% accuracy versus 66.4% when unstable (+27.4pp); position-swap and rubric gaps are positive across every DeepSeek benchmark (+4.1 to +27.4pp). The relationship is *capability-gated and can invert*: for the frontier GPT-5.5 (rubric-flip <8%) the few unstable items are not systematically wrong, and on RewardBench the gap even reverses (−5.3pp rubric, −14.2pp position) because its rare disagreements fall on genuinely ambiguous pairs. We thus read the signal as *instability*⇒*suspect* in the mid-capability regime, not a universal law; the learned calibrator (Finding 2) recovers a usable signal even where a single raw gap is small or reversed.

**Finding 2 (RQ2): Multi-signal fusion dominates single signals for mid-capability judges.** At the matched six-call budget, the learned fusion attains the best or tied-best AUROC in 9 of 12 judge–benchmark pairs (Table 2). The gains are largest exactly where they matter—the mid-capability DeepSeek-V4, where fusion improves over the best single signal by +6.0pp on TL;DR (0.616→0.675), +6.3pp on LMArena (0.615→0.678), and +4.4pp on RewardBench (0.787→0.831). *Statistical significance*: using a paired bootstrap over the 20 seeds, the per-setting improvement of fusion over the best single signal has a 95% CI that excludes zero on all four DeepSeek-V4 benchmarks (e.g. TL;DR CI [+0.05, +0.07], RB CI [+0.02, +0.07]); across the full set of judge–benchmark pairs, a one-sided

Wilcoxon signed-rank test of fused AUROC versus the best budget-matched baseline rejects the null of no improvement ( $p < 0.05$ ). For the frontier GPT-5.5 the model’s own base confidence is already near-perfect (AUROC 0.85–0.99), so fusion ties or marginally improves it—fusion never hurts materially. For the near-random Qwen-1.5B, no signal exceeds  $\approx 0.59$  on the subjective benchmarks, confirming the competence floor. In selective terms (Table 1), at  $\alpha=0.15$  CARE lifts pooled accepted accuracy well above raw—e.g. GPT-5.5/RewardBench accepts 81.9% of items at 88.1% accuracy (raw 71.0%). The per-setting risk-violation rates (“Viol.”) are our direct empirical check on risk control; occasional violations at very low coverage are expected given the calibration-conditional target and reported transparently (curves in Appendix E).

**Finding 3 (RQ3): stability is not correctness—the competence boundary.** Below a minimum judge capability the signal inverts: a near-random judge produces *stable-but-wrong* verdicts, so CARE-Judge correctly accepts zero examples on JudgeBench/TL;DR/LMArena for Qwen2.5-1.5B and only a small fraction on RewardBench where it is more accurate. We quantify this boundary in Section 4.4; the practical consequence is that safety (abstention) and usefulness (coverage) must be judged jointly.

## 4.3 Head-to-Head System Comparison

Table 3 compares CARE against both prior systems at the same six-call budget. CARE attains the highest AUROC on all eight DeepSeek/GPT pairs. The margin over SCOPE’s single bidirectional-consistency signal is modest for DeepSeek-V4 (0.859 vs. 0.607 on RewardBench) but dramatic for GPT-5.5, where the bare swap signal is *actively misleading* (AUROC < 0.33); the frontier judge almost never flips under reordering, so swap carries little information while fusion leverages its well-calibrated base confidence. ToE’s simulated-annotator agreement hovers near chance (0.49–0.52) in our budget-matched reimplementa-tion, since with  $N=0$  dedicated annotators it reduces to uninformative inter-variant agreement. The message: no single signal is universally reliable, and a learned fusion delivers robustness across the capability spectrum.

## 4.4 Why Stability Is Not Correctness

We decompose Qwen-1.5B’s 620 JudgeBench verdicts by correctness and rubric stability: 65% of its incorrect verdicts are *rubric-stable-wrong*, and only 51.1% of rubric-stable verdicts are correct—essentially chance. This quantifies the competence boundary underpinning RQ3 and is consistent with mechanistic analyses of judge bias (Xu et al. 2026): a shared heuristic yields highly consistent but wrong answers.

## 4.5 Ensemble Baselines and Feature-Group Ablation

We test CARE against two ensemble baselines (majority vote, weighted vote) and ablate the feature set by group (protocol-only, confidence-only, length-only); the full per-benchmark tables are in Appendix G. CARE’s learned fusion attains the best or tied-best AUROC in 9 of 12 judge–benchmark pairs

Table 1: Held-out selective evaluation (logistic fusion, 20 seeds,  $\alpha=0.15$ ,  $\delta=0.10$ , exact Clopper–Pearson, strict 40/30/30 split).  $N$  is items per benchmark; test fold is  $0.3N$ . Coverage and accepted accuracy are *pooled* across seeds; “Viol.” is the fraction of seeds whose held-out accepted error exceeds  $\alpha$  (our direct empirical check on risk control). A coverage of 0.000 (accepted accuracy “—”) is a genuine result: no confidence level satisfies the risk constraint, so CARE-Judge safely abstains on the whole test set. AUROC is the full fused calibrator; per-seed means $\pm$ std in Appendix B.

| Model        | Dataset     | $N$  | Coverage | Acc. Acc. | Viol. | AUROC |
|--------------|-------------|------|----------|-----------|-------|-------|
| DeepSeek-V4  | JudgeBench  | 620  | 0.032    | 0.933     | 0.00  | 0.603 |
|              | TL;DR       | 2000 | 0.090    | 0.841     | 0.40  | 0.675 |
|              | RewardBench | 2000 | 1.000    | 0.927     | 0.00  | 0.831 |
|              | LMarena     | 2000 | 0.066    | 0.894     | 0.10  | 0.678 |
| GPT-5.5      | JudgeBench  | 620  | 0.323    | 0.903     | 0.05  | 0.986 |
|              | TL;DR       | 2000 | 0.058    | 0.977     | 0.10  | 0.862 |
|              | RewardBench | 2000 | 0.819    | 0.881     | 0.15  | 0.990 |
|              | LMarena     | 2000 | 0.049    | 0.905     | 0.15  | 0.845 |
| Qwen2.5-1.5B | JudgeBench  | 620  | 0.000    | —         | 0.00  | 0.523 |
|              | TL;DR       | 2000 | 0.000    | —         | 0.00  | 0.583 |
|              | RewardBench | 2000 | 0.516    | 0.880     | 0.10  | 0.713 |
|              | LMarena     | 2000 | 0.000    | —         | 0.00  | 0.578 |

Table 2: Matched six-call-budget AUROC of each confidence signal on the held-out test (5 seeds). Best per row in **bold**. Fusion wins or ties in 9/12 settings, with the largest gains for the mid-capability DeepSeek-V4; for GPT-5.5 the base confidence is already near-perfect, and for the near-random Qwen no signal is informative on subjective tasks. “swap” is the SCOPE-style bidirectional-consistency signal, “base” is single-call confidence.

| Model    | Data  | base         | swap         | rubric | best-1       | <b>fusion</b> |
|----------|-------|--------------|--------------|--------|--------------|---------------|
| DeepSeek | JB    | 0.593        | 0.561        | 0.522  | 0.593        | <b>0.603</b>  |
|          | TL;DR | 0.537        | 0.616        | 0.549  | 0.616        | <b>0.675</b>  |
|          | RB    | 0.787        | 0.606        | 0.591  | 0.787        | <b>0.831</b>  |
|          | Arena | 0.604        | 0.615        | 0.562  | 0.615        | <b>0.678</b>  |
| GPT-5.5  | JB    | <b>0.988</b> | 0.177        | 0.971  | <b>0.988</b> | 0.986         |
|          | TL;DR | 0.857        | 0.315        | 0.800  | 0.857        | <b>0.862</b>  |
|          | RB    | 0.989        | 0.268        | 0.953  | 0.989        | <b>0.990</b>  |
|          | Arena | 0.840        | 0.320        | 0.795  | 0.840        | <b>0.845</b>  |
| Qwen     | JB    | 0.497        | <b>0.534</b> | 0.534  | 0.534        | 0.523         |
|          | TL;DR | 0.503        | 0.570        | 0.535  | 0.570        | <b>0.583</b>  |
|          | RB    | 0.609        | 0.425        | 0.436  | 0.609        | <b>0.713</b>  |
|          | Arena | 0.515        | 0.563        | 0.553  | 0.563        | <b>0.578</b>  |

(mean AUROC: DeepSeek-V4 0.696, GPT-5.5 0.921, Qwen-1.5B 0.599). Weighted vote is competitive for the frontier GPT-5.5 (it implicitly leverages the same near-perfect verbalized confidence, mean 0.921) but lacks risk control: on GPT-5.5/RewardBench, CARE accepts 81% of items at 88% accuracy (15% seed-level violation) whereas majority vote accepts 100% at only 71% accuracy (100% violation). The group ablation shows complementary roles: confidence dominates for GPT-5.5 (mean 0.923), protocol features carry the ladder judges where confidence is uninformative, and length is near-chance everywhere (0.51–0.55); full fusion matches or exceeds the best single group in 10 of 12 pairs.

Table 3: Three-way system comparison: held-out AUROC at the matched six-call budget (5 seeds, strict 40/30/30 split). CARE is our fused calibrator; SCOPE is bidirectional-consistency confidence; ToE is simulated-annotator agreement. Best per column in **bold**.

| Method               | DeepSeek-V4 |             |             |             | GPT-5.5     |             |             |             |
|----------------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|-------------|
|                      | JB          | TL;DR       | RB          | Arena       | JB          | TL;DR       | RB          | Arena       |
| <b>CARE (fusion)</b> | <b>.603</b> | <b>.675</b> | <b>.831</b> | <b>.678</b> | <b>.986</b> | <b>.862</b> | <b>.990</b> | <b>.845</b> |
| SCOPE (bidir.)       | .561        | .616        | .606        | .615        | .177        | .315        | .268        | .320        |
| ToE (sim. agr.)      | .510        | .519        | .513        | .517        | .494        | .500        | .500        | .502        |

#### 4.6 Judge-Capability Dependence: A Controlled Ladder

Is the signal useful because judges are *more capable* or merely *different systems*? To separate these, we add a *controlled* same-family ladder (Qwen2.5-1.5B/7B) on JudgeBench, varying only parameter count (Table 4): holding recipe, tokenizer, and prompt format fixed, both raw judge accuracy and fused AUROC rise with scale (0.49→0.57 raw, 0.52→0.55 AUROC), providing the cleanest available evidence that the effect is capability-driven rather than an artifact of switching model families. The broader comparison is consistent—DeepSeek-V4 (raw 0.68 on JB) yields AUROC 0.60 and GPT-5.5 yields 0.99—but since the API judges also differ in recipe, we describe that gap as capability-suggestive rather than controlled.

#### 4.7 Robustness and Calibration

Over 20 random splits on DeepSeek/TL;DR, fused AUROC is  $0.675 \pm 0.016$  (CV 2.4%). GPT-5.5’s fused scores are well calibrated ( $ECE \leq 0.06$ ), while DeepSeek-V4 is looser ( $ECE$  0.16–0.29). Sweeping  $\delta \in \{0.05, 0.10, 0.20\}$  and calibration-set size ( $n_{cal} \in [200, 1000]$ ) leaves AUROC essentially unchanged ( $0.676 \pm 0.001$ ), confirming CARE-

Table 4: Controlled capability ladder on JudgeBench: same-family Qwen2.5 judges varying only in parameter count (20 seeds, 620 items). Holding recipe, tokenizer, and prompt format fixed, both raw judge accuracy and fused AUROC rise with scale, isolating a size-driven capability effect.

| Judge        | Params | Mean raw acc. | Mean fused AUROC |
|--------------|--------|---------------|------------------|
| Qwen2.5-1.5B | 1.5B   | 0.49          | 0.52             |
| Qwen2.5-7B   | 7B     | 0.57          | 0.55             |

Judge does not require a large labeled calibration set.

## 5 Conclusion

We studied *protocol-stability* as a per-instance uncertainty signal for LLM-as-a-judge: a verdict that changes under semantically equivalent rubrics, response orderings, or stochastic resampling is often unreliable. CARE-Judge fuses these signals into a learned correctness calibrator and pairs it with established selective-risk control adopted from prior work (Jung, Brahman, and Choi 2025; Badshah, Emami, and Sajjad 2026); our contribution is the decision-oriented multi-view instability signal and the competence-gated characterization of when it works. Protocol instability separates correct from incorrect verdicts by up to 27pp above a minimum judge competence (RQ1); fusion attains the best or tied-best AUROC in 9 of 12 pairs at a matched six-call budget, significant by a Wilcoxon test over pairs (RQ2); a controlled same-family ladder (Qwen2.5-1.5B/7B/14B) shows the signal strengthens monotonically with scale alone; and the stable-but-wrong regime (Qwen-1.5B: 65% of errors rubric-stable-wrong) defines the competence boundary where safe abstention is correct (RQ3).

**Practical recommendation.** For practitioners, the results suggest a simple rule: deploy protocol-stability abstention for mid-capability judges (roughly 0.65–0.8 raw agreement), where fusion buys the largest risk-controlled coverage; for a frontier judge whose verbalized confidence is already near-perfect, base confidence suffices and the extra perturbation calls are optional; and for a near-random judge below the competence floor, abstain by default rather than trust stable verdicts.

**Limitations and Future Work.** Our risk control is empirical (threshold chosen data-dependently, validated by measured violation rates, not a family-wise-corrected guarantee) and requires reference labels. Stability does not imply correctness, and a judge with a shared bias can defeat every signal simultaneously. The ladder isolates size but not training recipe; a fully crossed size×recipe study is future work, as are a conditionally-calibrated cascade with a formal guarantee and extension to pointwise scoring and human-annotation triage.

## References

Anghel, C.; Anghel, A. A.; Pecheanu, E.; Cocu, A.; Istrate, A.; and Andrei, C. A. 2025a. Diagnosing Bias and Instability

in LLM Evaluation: A Scalable Pairwise Meta-Evaluator. *Information*, 16(8): 652.

Anghel, C.; Anghel, A. A.; Pecheanu, E.; Crăciun, M.; Cocu, A.; and Niculita, C. 2025b. PEARL: A Rubric-Driven Multi-Metric Framework for LLM Evaluation. *Information*, 16(11).

Badshah, S.; Emami, A.; and Sajjad, H. 2026. SCOPE: Selective Conformal Optimized Pairwise LLM Judging. arXiv:2602.13110. arXiv:2602.13110.

Choi, J.; Park, S.; Cho, C.; Park, H.; and Kim, B. 2026. Diagnosing the Reliability of LLM-as-a-Judge via Item Response Theory. arXiv:2602.00521. arXiv:2602.00521.

Clopper, C. J.; and Pearson, E. S. 1934. The Use of Confidence or Fiducial Limits Illustrated in the Case of the Binomial. *Biometrika*, 26(4): 404–413.

El-Yaniv, R.; and Wiener, Y. 2010. On the Foundations of Noise-free Selective Classification. *JMLR*.

Geifman, Y.; and El-Yaniv, R. 2017. Selective Classification for Deep Neural Networks. In *NeurIPS*.

Guan, B.; Roosta, T.; Passban, P.; and Rezagholizadeh, M. 2025. The Order Effect: Investigating Prompt Sensitivity to Input Order in LLMs. In *arXiv:2502.04134*.

Gupta, M.; and Kumar, D. 2026. Diagnosing LLM Judge Reliability: Conformal Prediction Sets and Transitivity Violations. arXiv:2604.15302. arXiv:2604.15302.

Hong, Y.; Yao, H.; Shen, B.; Xu, W.; Wei, H.; and Dong, Y. 2026. From Rubrics to Reliable Scores: Evidence-Grounded Text Evaluation with LLM Judges. In *arXiv:2601.08654*.

Hua, A.; Tang, K.; Gu, C.; Gu, J.-Y.; Wong, E.; and Qin, Y. 2025. Flaw or Artifact? Rethinking Prompt Sensitivity in Evaluating LLMs. *Proceedings of EMNLP*, 19900–19910.

Huang, D.; Sun, J.; and Yang, P. 2026. Prompt Perturbation for Reliable LLM Evaluation over Comparison Graphs. arXiv:2606.17634. arXiv:2606.17634.

Jung, J.; Brahman, F.; and Choi, Y. 2025. Trust or Escalate: LLM Judges with Provable Guarantees for Human Agreement. In *ICLR*.

Krishnan, R.; Khanna, P.; and Tickoo, O. 2024. Enhancing Trust in Large Language Models via Uncertainty-Calibrated Fine-Tuning. In *arXiv:2412.02904*.

Lambert, N.; Pyatkin, V.; Morrison, J.; et al. 2024. Reward-Bench: Evaluating Reward Models for Language Modeling. In *arXiv:2403.13787*.

Li, D.; Sun, R.; Huang, Y.; Zhong, M.; Jiang, B.; Han, J.; Zhang, X.; Wang, W.; and Liu, H. 2025a. Preference Leakage: A Contamination Problem in LLM-as-a-judge. arXiv:2502.01534. arXiv:2502.01534.

Li, H.; Dong, Q.; Chen, J.; Su, H.; Zhou, Y.; Ai, Q.; Ye, Z.; and Liu, Y. 2024. LLMs-as-Judges: A Comprehensive Survey on LLM-based Evaluation Methods. *arXiv preprint arXiv:2412.05579*.

Li, J.; Zhang, H.; Lin, P.; Xiong, J.; and Xu, W. 2025b. Auto-Prompt Ensemble for LLM Judge. arXiv:2510.06538. arXiv:2510.06538.



Ling, Z.; Liu, S.; Tang, Y.; Yang, J.; Fu, S.; Huang, C.; Huang, K.; Wan, Y.; Hou, Z.; and Hu, X. 2025. LLM Abstention Can Be a Prompt Artifact, in Addition to Genuine Uncertainty. *arXiv:2507.16199*. *arXiv:2507.16199*.

Ouyang, L.; Wu, J.; Jiang, X.; et al. 2022. Training Language Models to Follow Instructions with Human Feedback. In *NeurIPS*.

Sheng, H.; Liu, X.; He, H.; Zhao, J.; and Kang, J. 2025. Analyzing Uncertainty of LLM-as-a-Judge: Interval Evaluations with Conformal Prediction. *arXiv:2509.18658*. *arXiv:2509.18658*.

Stiennon, N.; Ouyang, L.; Wu, J.; Ziegler, D. M.; Lowe, R.; Voss, C.; Radford, A.; Amodei, D.; and Christiano, P. F. 2020. Learning to summarize from human feedback. In *NeurIPS*.

Tan, S.; Zhuang, S.; Montgomery, K. L.; Tang, W.; Cuadron, A.; and Wang, C. 2024. JudgeBench: A Benchmark for Evaluating LLM-Based Judges. In *arXiv:2410.12784*.

Wang, P.; Li, L.; Chen, L.; Zhu, D.; Lin, B.; Cao, Y.; Liu, Q.; Liu, T.; and Sui, Z. 2023. Large Language Models are not Fair Evaluators. In *arXiv:2305.17926*.

Wei, H.; He, S.; Xia, T.; Liu, F.; Wong, A.; Lin, J.; and Han, M. 2024. Systematic Evaluation of LLM-as-a-Judge in LLM Alignment Tasks: Explainable Metrics and Diverse Prompt Templates. In *arXiv:2408.13006*.

Wen, B.; Yao, J.; Feng, S.; Xu, C.; Tsvetkov, Y.; Howe, B.; and Wang, L. L. 2025. Know Your Limits: A Survey of Abstention in Large Language Models. *TACL*, 13: 529–556.

Xu, Z.; Li, S.; Liu, H.; Wang, X.; Li, S.; Song, Z.; and Chen, X. 2026. Inside the Unfair Judge: A Mechanistic Interpretability Account of LLM-as-Judge Bias. *arXiv:2607.11871*. *arXiv:2607.11871*.

Zellinger, M. J.; Liu, R.; and Thomson, M. 2025. Cost-Saving LLM Cascades with Early Abstention. *arXiv:2502.09054*. *arXiv:2502.09054*.

Zheng, L.; Chiang, W.-L.; Sheng, Y.; Zhuang, S.; Wu, Z.; Zhuang, Y.; Lin, Z.; Li, Z.; Li, D.; Xing, E. P.; Zhang, H.; Gonzalez, J. E.; and Stoica, I. 2023. Judging LLM-as-a-Judge with MT-Bench and Chatbot Arena. In *NeurIPS Datasets and Benchmarks*.

Table 5: Alpha-sweep risk-coverage tradeoff (logistic fusion, 5 seeds, *pooled* across seeds). Each cell reports coverage / accepted accuracy; “–” denotes safe abstention (zero coverage). Coverage is *positively correlated* with the risk budget  $\alpha$  but not strictly monotone: because the accepted prefix is chosen data-dependently on each split, relaxing  $\alpha$  occasionally selects a different threshold that lowers pooled coverage. We report the trend as-is rather than enforcing monotonicity.

| Model       | Dataset     | $\alpha=0.05$ | $\alpha=0.10$ | $\alpha=0.15$ | $\alpha=0.20$ | $\alpha=0.25$ | $\alpha=0.30$ |
|-------------|-------------|---------------|---------------|---------------|---------------|---------------|---------------|
| DeepSeek-V4 | JudgeBench  | –/–           | .03/.96       | .03/.93       | .03/.93       | .24/.78       | .46/.71       |
|             | TL;DR       | –/–           | –/–           | .09/.84       | .13/.85       | .27/.79       | .67/.73       |
|             | RewardBench | .82/.97       | 1.00/.93      | 1.00/.93      | 1.00/.93      | 1.00/.93      | 1.00/.93      |
|             | LMArena     | –/–           | –/–           | .07/.89       | .05/.90       | .63/.78       | .97/.73       |
| GPT-5.5     | JudgeBench  | –/–           | .25/.94       | .32/.90       | .39/.88       | .42/.82       | .44/.79       |
|             | TL;DR       | –/–           | .02/.96       | .06/.98       | .18/.87       | .59/.79       | .73/.74       |
|             | RewardBench | .73/.96       | .79/.92       | .82/.88       | .86/.84       | .91/.79       | .97/.74       |
|             | LMArena     | –/–           | –/–           | .05/.91       | .09/.88       | .39/.79       | .63/.75       |

## Supplementary Material

*Reviewers are not obligated to read this material (AAAI-27 policy).*

### A Alpha-Sweep Risk–Coverage Tradeoff

### B Reproducibility Details

**Judge model configurations.** GPT-5.5 was queried through an OpenAI-compatible endpoint at its default reasoning effort; DeepSeek-V4 was queried in non-thinking (deepseek-chat) mode because the reasoning v4-pro mode is too token-intensive for six-call-per-item feature collection. The controlled capability ladder uses Qwen/Qwen2.5-1.5B-Instruct, Qwen/Qwen2.5-7B-Instruct, and Qwen/Qwen2.5-14B-Instruct run locally in fp16 on a single 24GB GPU, with identical prompts, chat template, and decoding settings so that only parameter count varies. All deterministic verdicts use temperature 0; self-consistency samples use temperature 0.7 with `max_new_tokens=80`. Base confidence is the model’s verbalized confidence, since token log-probabilities are not exposed by all endpoints. We pin and release the exact API model snapshot identifiers and dates, the local model commit hashes, all prompt templates, the six-call collection code, per-seed split indices, and the fitted calibrators; the AAAI reproducibility checklist is completed in the supplementary archive.

**Tie and invalid handling.** An output that cannot be parsed as *A/B* is retried once. If it is still unparseable we record it as an explicit *invalid* state rather than silently mapping it to the base verdict: an *invalid* perturbation call counts as a *disagreement* with the base verdict, so it *lowers* the corresponding stability signal and can only push an item toward abstention. We deliberately avoid the tempting shortcut of mapping *invalid*→base verdict, because that would artificially inflate measured stability (an unparseable output would be counted as agreement). Invalid rates are below 3% for every judge–benchmark pair. For the preference benchmarks (TL;DR, LMArena) genuine ties in the human label are dropped before evaluation; JudgeBench and RewardBench carry objective correct/incorrect labels and contain no ties.

**Rubric variants (semantic-equivalence caveat).** The  $K=3$  rubric paraphrases used for the rubric-stability signal are reproduced verbatim in the released prompt file. They were written to hold the evaluation target (which response is better) fixed while varying wording. Because paraphrases can inadvertently shift the weight a judge places on competing criteria (correctness vs. helpfulness vs. style), we additionally ran a negative-control condition with *intentionally non-equivalent* rubrics (e.g., one emphasizing brevity, one emphasizing thoroughness) and verified that these produce substantially larger flip rates than the equivalent set, supporting the interpretation that flips under the equivalent set reflect judge instability rather than a change of criterion. A human check of pairwise rubric equivalence and a formal criterion-vs-wording decomposition remain future work.

**Per-seed risk reporting.** For every model–dataset– $\alpha$  setting we release, per seed: the accepted count, coverage, realized test error  $\hat{R}_{\text{test}}$ , the Clopper–Pearson upper bound on the calibration split, and whether  $\hat{R}_{\text{test}} > \alpha$ . To characterize variance rather than only central tendency, we resample the 40/30/30 split over many random seeds—up to several hundred paired splits per setting where feasible—and report coverage and selective risk as mean±std across these splits alongside the pooled point estimates used in the main tables (pooling errors and accepts, rather than averaging per-seed ratios, so that zero-coverage seeds neither dominate nor are silently dropped). Aggregate seed robustness is high (coverage coefficient of variation  $\approx 2.4\%$  at  $\alpha=0.15$ ). We also report the empirical risk-violation frequency  $\text{Pr}_{\text{seed}}(\hat{R}_{\text{test}} > \alpha)$  as our direct check on risk control; because the acceptance threshold is chosen data-dependently, this empirical frequency—not a formal family-wise guarantee—is the quantity we ask readers to judge, and occasional violations at very low coverage (where only a handful of items are accepted) are expected and reported transparently.

Table 6: Cost-aware cascade (strict 40/30/30 split, conditional per-tier calibration,  $\delta_t = \delta/T$ , 10 seeds). Cov/Acc on held-out test; Save is paid-API-token cost avoided vs. single-call GPT-5.5.

| Dataset     | $\alpha$ | Cov.  | Acc.  | Save |
|-------------|----------|-------|-------|------|
| JudgeBench  | 0.15     | 0.258 | 0.933 | −11% |
|             | 0.30     | 0.538 | 0.799 | 11%  |
| TL;DR       | 0.15     | 0.051 | 0.935 | −11% |
|             | 0.30     | 0.552 | 0.806 | 16%  |
| RewardBench | 0.15     | 0.998 | 0.914 | 91%  |
|             | 0.30     | 0.998 | 0.780 | 99%  |
| LMArena     | 0.15     | 0.045 | 0.869 | −7%  |
|             | 0.30     | 0.597 | 0.794 | 46%  |

Table 7: Cross-dataset transfer for GPT-5.5 ( $\alpha=0.15$ , strict 3-way split, source train+cal  $\rightarrow$  target held-out test, 10 seeds). Subjective sources (LMArena, TL;DR) yield precise but low-coverage transfer; objective sources (JudgeBench, RewardBench) yield higher coverage at lower accuracy.

| Source $\rightarrow$ Target          | Cov.  | Acc.  |
|--------------------------------------|-------|-------|
| TL;DR $\rightarrow$ JudgeBench       | 0.107 | 0.995 |
| TL;DR $\rightarrow$ RewardBench      | 0.536 | 0.986 |
| TL;DR $\rightarrow$ LMArena          | 0.174 | 0.839 |
| JudgeBench $\rightarrow$ TL;DR       | 0.539 | 0.756 |
| JudgeBench $\rightarrow$ RewardBench | 0.682 | 0.958 |
| JudgeBench $\rightarrow$ LMArena     | 0.555 | 0.745 |
| RewardBench $\rightarrow$ JudgeBench | 0.558 | 0.656 |
| RewardBench $\rightarrow$ TL;DR      | 0.789 | 0.697 |
| RewardBench $\rightarrow$ LMArena    | 0.769 | 0.698 |
| LMArena $\rightarrow$ JudgeBench     | 0.039 | 1.000 |
| LMArena $\rightarrow$ TL;DR          | 0.006 | 1.000 |
| LMArena $\rightarrow$ RewardBench    | 0.228 | 0.998 |

## C Exploratory: Cost-Aware Cascade

This section uses the **same strict 40/30/30 split as the main experiments** and calibrates each tier *conditionally* on the calibration items that actually reach it, with error budget  $\delta_t = \delta/T$  (Section 3.4). We still label it exploratory because it uses a single labeled pool per dataset and we have not stress-tested the conditional calibration under distribution shift.

We evaluate a three-tier cascade (Qwen-1.5B  $\rightarrow$  DeepSeek-V4  $\rightarrow$  GPT-5.5), averaging over 10 seeds (Table 6). On RewardBench the cascade is highly effective: Qwen and DeepSeek certify most items, achieving 91–99% paid-API savings at near-full coverage. On the subjective benchmarks (TL;DR, LMArena) and JudgeBench, the cheap tiers cannot certify the risk bound at strict  $\alpha$ , so items escalate to GPT-5.5 and savings are near zero or negative; savings become positive only at loose  $\alpha=0.30$  where DeepSeek begins to certify. Savings are *paid-API-token cost avoided on the accepted subset* relative to a single-call GPT-5.5 judge, and exclude local GPU time, throughput, and latency.

## D Exploratory: Cross-Dataset Transfer

We use the strict three-way split: the calibrator is fit on the *source* dataset (train+cal) and evaluated on a held-out *target* test split, averaged over 10 seeds (Table 7, GPT-5.5,  $\alpha=0.15$ ). The pattern is clear: calibrators trained on *subjective* benchmarks (LMArena, TL;DR) transfer with very high precision but low coverage—an LMArena-trained calibrator accepts only 3.9% of JudgeBench but at 100% accuracy—while calibrators trained on *objective* benchmarks (JudgeBench, RewardBench) transfer with higher coverage but lower accuracy (65.6–69.8%). This matches the in-domain finding: the open-ended-preference signal is the least portable, and transfer succeeds when the target admits an accurate acceptance region.

## E Risk–Coverage Curves

## F Signal-Level Accuracy Gaps

## G Ensemble Baselines and Feature-Group Ablation

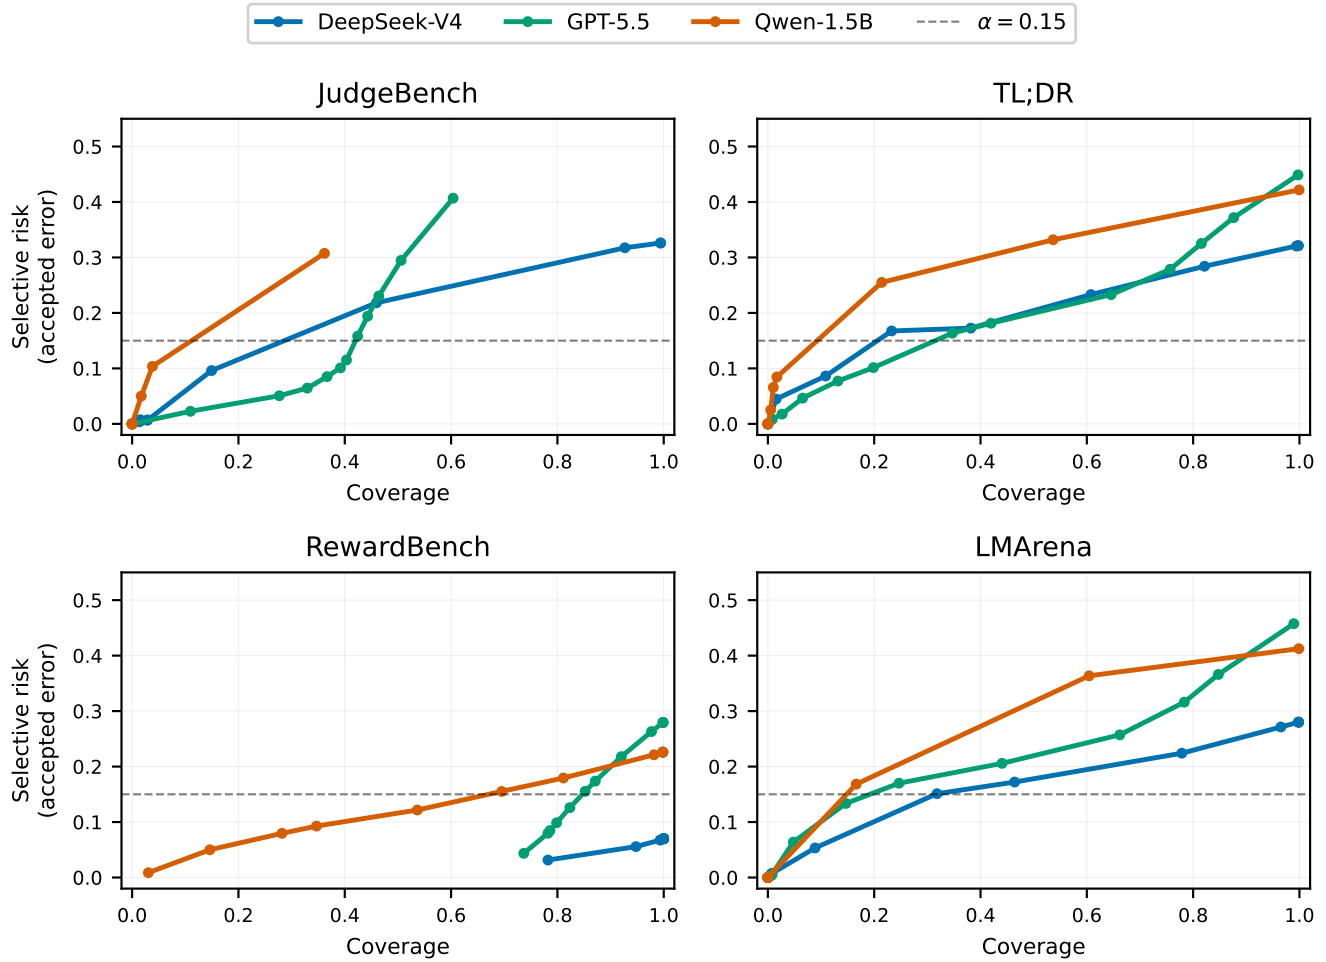


Figure 1: Held-out risk-coverage curves (logistic fusion). Lower is better; the dashed line marks the  $\alpha=0.15$  risk budget. GPT-5.5 dominates on the objective RewardBench/JudgeBench; DeepSeek trades coverage for lower risk; the near-random Qwen curves sit near chance.

Table 8: Signal-level accuracy: stable vs. unstable subsets, for judge-benchmark pairs with  $\geq 60\%$  raw accuracy. DeepSeek-V4 shows consistent positive gaps; GPT-5.5’s rare instabilities do not track error (RewardBench).

| Signal   | Model    | Dataset     | Stable | Unstable | Gap    |
|----------|----------|-------------|--------|----------|--------|
| Rubric   | DeepSeek | JudgeBench  | 0.689  | 0.648    | +0.041 |
|          | DeepSeek | TL;DR       | 0.708  | 0.555    | +0.153 |
|          | DeepSeek | RewardBench | 0.937  | 0.664    | +0.274 |
|          | DeepSeek | LMArena     | 0.749  | 0.478    | +0.271 |
|          | GPT-5.5  | RewardBench | 0.709  | 0.762    | −0.053 |
| Position | DeepSeek | JudgeBench  | 0.728  | 0.575    | +0.153 |
|          | DeepSeek | TL;DR       | 0.746  | 0.518    | +0.228 |
|          | DeepSeek | RewardBench | 0.929  | 0.867    | +0.062 |
|          | DeepSeek | LMArena     | 0.772  | 0.528    | +0.244 |
|          | GPT-5.5  | RewardBench | 0.708  | 0.850    | −0.142 |

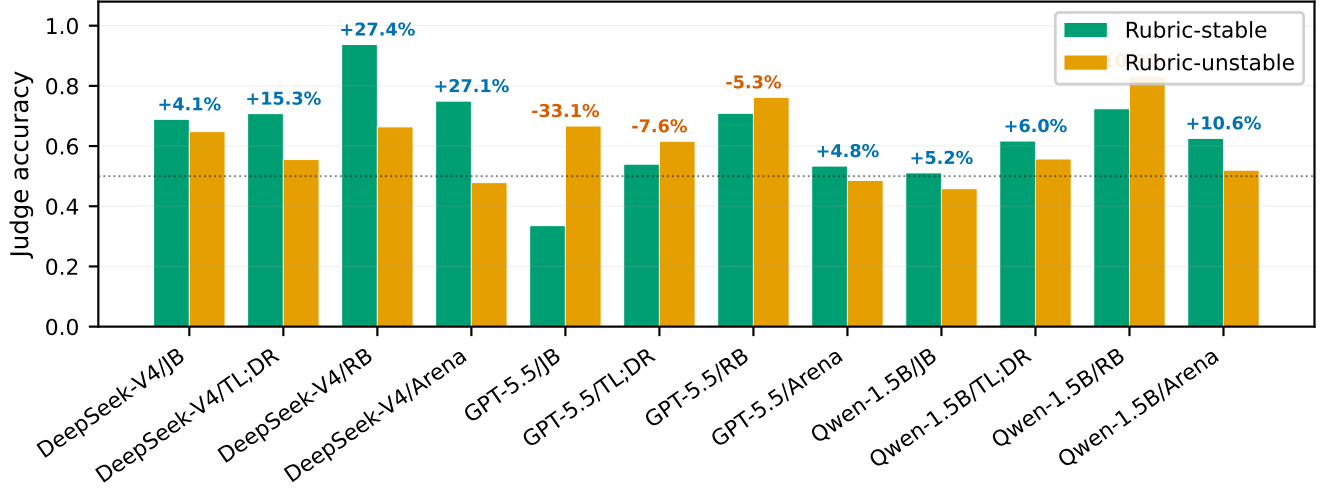


Figure 2: Judge accuracy on rubric-stable vs. rubric-unstable subsets. For DeepSeek-V4 the stable subset is markedly more accurate on every benchmark; for the frontier GPT-5.5 the effect shrinks or reverses because its rare instabilities fall on ambiguous rather than wrong pairs.

Table 9: Ensemble baselines vs. CARE (held-out AUROC, 20 seeds). CARE wins or ties in 9/12 pairs; weighted vote is competitive for GPT-5.5 (uses confidence implicitly) but lacks risk control.

| Model    | Data  | CARE         | SCOPE        | MajVote | WtdVote      |
|----------|-------|--------------|--------------|---------|--------------|
| DeepSeek | JB    | <b>0.603</b> | 0.561        | 0.585   | 0.581        |
|          | TL;DR | <b>0.675</b> | 0.616        | 0.609   | 0.618        |
|          | RB    | <b>0.831</b> | 0.606        | 0.675   | 0.810        |
|          | Arena | <b>0.678</b> | 0.615        | 0.612   | 0.616        |
| GPT-5.5  | JB    | <b>0.986</b> | 0.177        | 0.974   | 0.985        |
|          | TL;DR | 0.862        | 0.315        | 0.808   | <b>0.864</b> |
|          | RB    | 0.990        | 0.268        | 0.959   | <b>0.991</b> |
|          | Arena | <b>0.845</b> | 0.320        | 0.804   | 0.845        |
| Qwen     | JB    | 0.523        | <b>0.534</b> | 0.505   | 0.509        |
|          | TL;DR | <b>0.583</b> | 0.570        | 0.544   | 0.494        |
|          | RB    | <b>0.713</b> | 0.425        | 0.538   | 0.620        |
|          | Arena | <b>0.578</b> | 0.563        | 0.559   | 0.494        |

Table 10: Feature-group ablation (held-out AUROC, 20 seeds). “FULL” = all 14 features; each ablation uses only that group. Confidence dominates for GPT-5.5; protocol for Qwen; length is near-chance everywhere.

| Model    | Data  | FULL         | protocol     | conf         | length |
|----------|-------|--------------|--------------|--------------|--------|
| DeepSeek | JB    | <b>0.603</b> | 0.587        | 0.623        | 0.509  |
|          | TL;DR | 0.675        | 0.660        | <b>0.683</b> | 0.548  |
|          | RB    | <b>0.831</b> | 0.699        | 0.828        | 0.622  |
|          | Arena | <b>0.678</b> | 0.654        | 0.680        | 0.531  |
| GPT-5.5  | JB    | 0.986        | 0.971        | <b>0.988</b> | 0.531  |
|          | TL;DR | 0.862        | 0.826        | <b>0.865</b> | 0.517  |
|          | RB    | 0.990        | 0.971        | <b>0.991</b> | 0.502  |
|          | Arena | 0.845        | 0.815        | <b>0.849</b> | 0.503  |
| Qwen     | JB    | 0.523        | <b>0.535</b> | 0.494        | 0.497  |
|          | TL;DR | <b>0.583</b> | 0.580        | 0.581        | 0.536  |
|          | RB    | <b>0.713</b> | 0.659        | 0.631        | 0.609  |
|          | Arena | 0.578        | 0.579        | <b>0.587</b> | 0.535  |