

The life of Nicholas D. O. A. S. V. Piano

Being a motherfucking sorcerer



Nicholas Piano

Department of Engineering
University of Cambridge

This dissertation is submitted for the degree of
Master of Philosophy

St Edmunderonioni's College

September 2015

I would like to dedicate this thesis to my loving parents ...

Declaration

I hereby declare that except where specific reference is made to the work of others, the contents of this dissertation are original and have not been submitted in whole or in part for consideration for any other degree or qualification in this, or any other university. This dissertation is my own work and contains nothing which is the outcome of work done in collaboration with others, except as specified in the text and Acknowledgements. This dissertation contains fewer than 15,000 words including appendices, bibliography, footnotes, tables and equations and has fewer than 150 figures.

Nicholas Piano
September 2015

Acknowledgements

And I would like to acknowledge ...

Abstract

This is where you write your abstract ...

Table of contents

List of figures	xiii
List of tables	xv
1 Introduction	1
1.1 Motivation of current project	1
1.2 Importance of accurate cell segmentation	1
1.3 Using 3D data to improve 2D images	1
1.4 Thesis outline	1
2 Cell segmentation	3
2.1 Basics of image manipulation	3
2.1.1 Image manipulation overview	3
2.1.2 Edge detection	3
2.1.3 Blobs	3
2.1.4 Complex features and machine learning	3
2.2 Basics of cell segmentation	3
2.2.1 Optical structure of the cell	3
2.2.2 Cell shape	3
2.2.3 Fluorescence microscopy	3
2.3 Review of studies on cell segmentation	3
2.3.1 Studies using GFP fluorescence data	3
2.3.2 Studies using brightfield data	3
2.3.3 Review of studies	3
3 Preparing images for segmentation	7
3.1 3D confocal imaging	7
3.2 Using GFP fluorescence data	7
3.3 Using Brightfield image data	7

3.4	Review of a study using Brightfield data	7
4	Methodology	9
4.1	Definitions and assumptions	9
4.2	Generating zMod	9
4.3	Manual tracking	9
4.4	Generating zEdge for segmentation	9
4.5	Sensitivity analysis of zMod parameters	9
5	Results	11
5.1	Image modification	11
5.1.1	zMod	11
5.1.2	zBF	11
5.1.3	zEdge	11
5.2	Segmentation	11
5.2.1	GFP segmentation	11
5.2.2	Brightfield variance segmentation	11
5.2.3	zEdge segmentation	11
5.2.4	Manual segmentation	11
6	Discussion	13
6.1	zMod sensitivity results	13
6.2	zEdge	13
6.3	Previous method comparison	13
6.3.1	Precision, Recall, and FScore	13
6.3.2	Results	13
7	Conclusion	15
7.1	Summary	15
7.2	Future work	15
Appendix A How to install L^AT_EX		17
Appendix B Installing the CUED class file		21

List of figures

2.1	Brightfield image sample	4
2.2	The canny filter	5

List of tables

Chapter 1

Introduction

1.1 Motivation of current project

$$CIF : \quad F_0^j(a) = \frac{1}{2\pi i} \oint_{\gamma} \frac{F_0^j(z)}{z-a} dz \quad (1.1)$$

1.2 Importance of accurate cell segmentation

1.3 Using 3D data to improve 2D images

1.4 Thesis outline

Chapter 2

Cell segmentation

2.1 Basics of image manipulation

2.1.1 Image manipulation overview

2.1.2 Edge detection

2.1.3 Blobs

2.1.4 Complex features and machine learning

2.2 Basics of cell segmentation

2.2.1 Optical structure of the cell

2.2.2 Cell shape

2.2.3 Fluorescence microscopy

2.3 Review of studies on cell segmentation

2.3.1 Studies using GFP fluorescence data

2.3.2 Studies using brightfield data

2.3.3 Review of studies

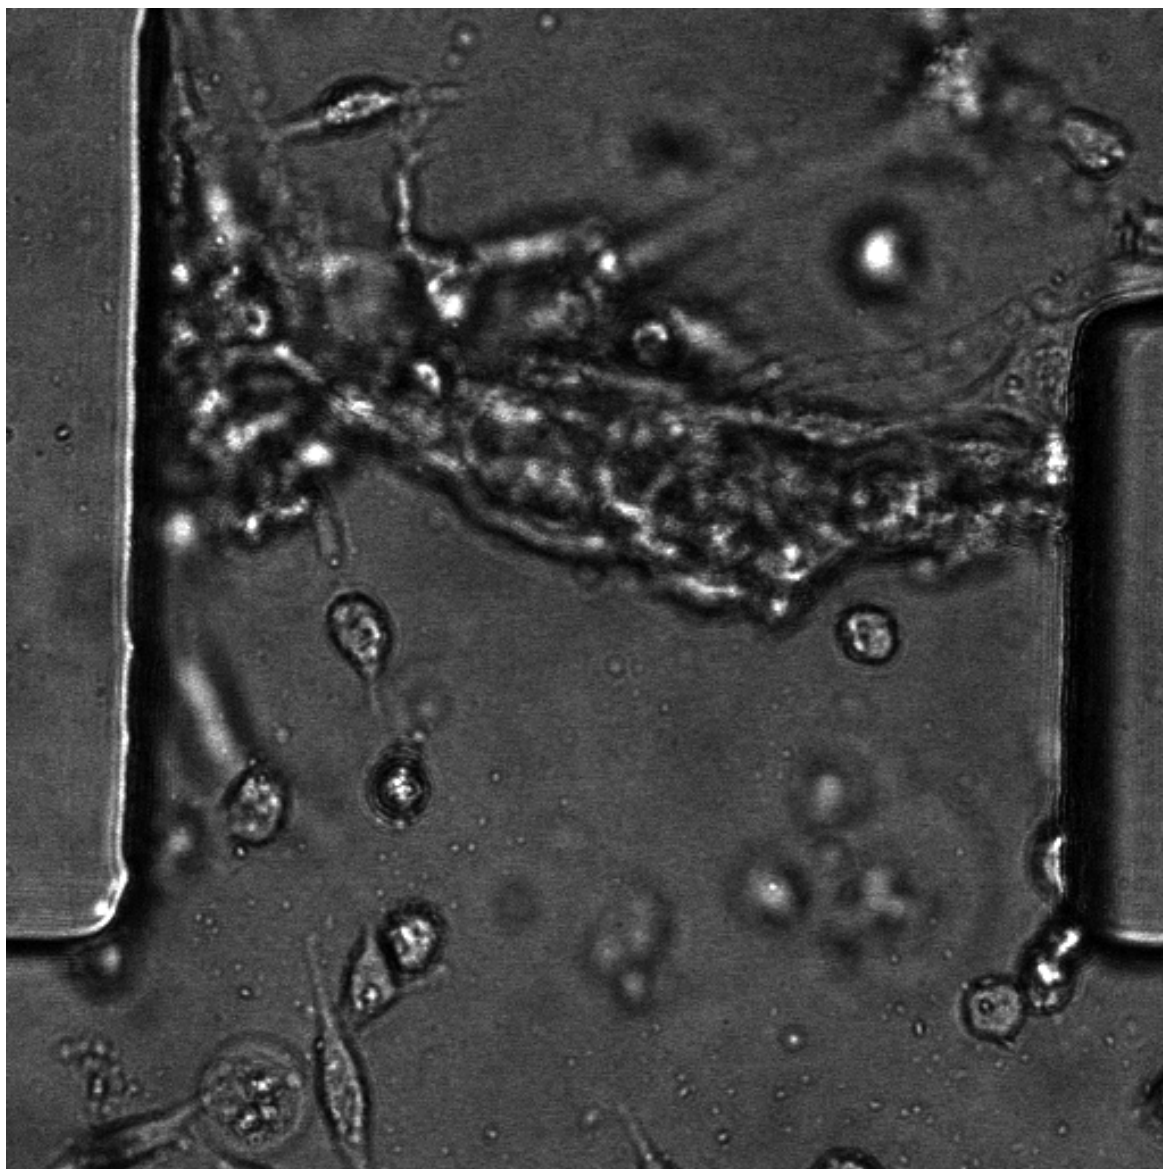


Fig. 2.1 An example of a typical Brightfield image taken with a confocal microscope.

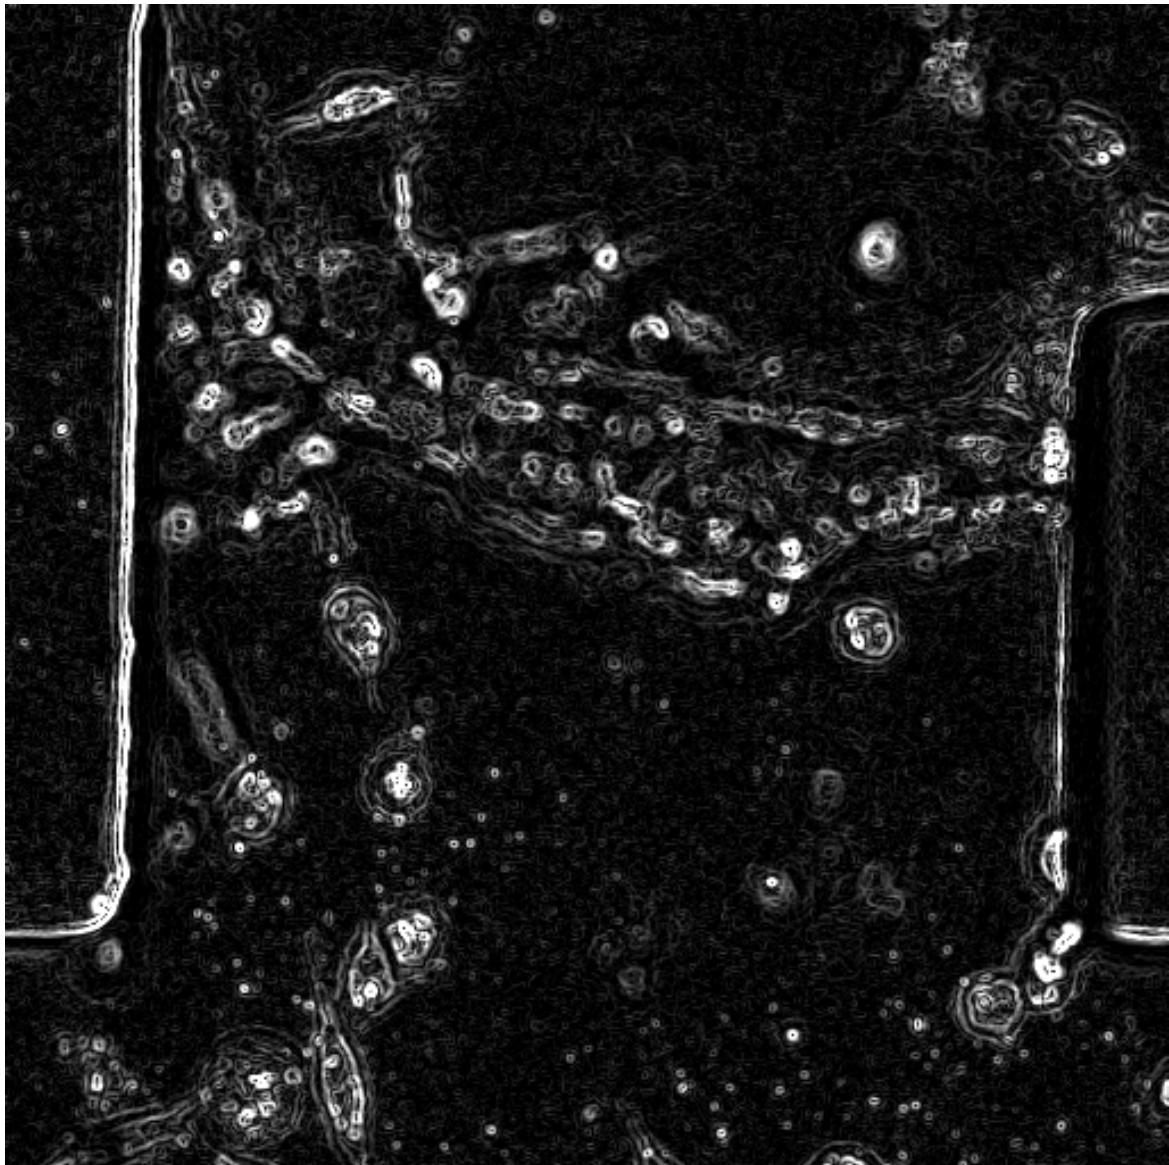


Fig. 2.2 Edges can be found using the Canny Edge Detection Filter.

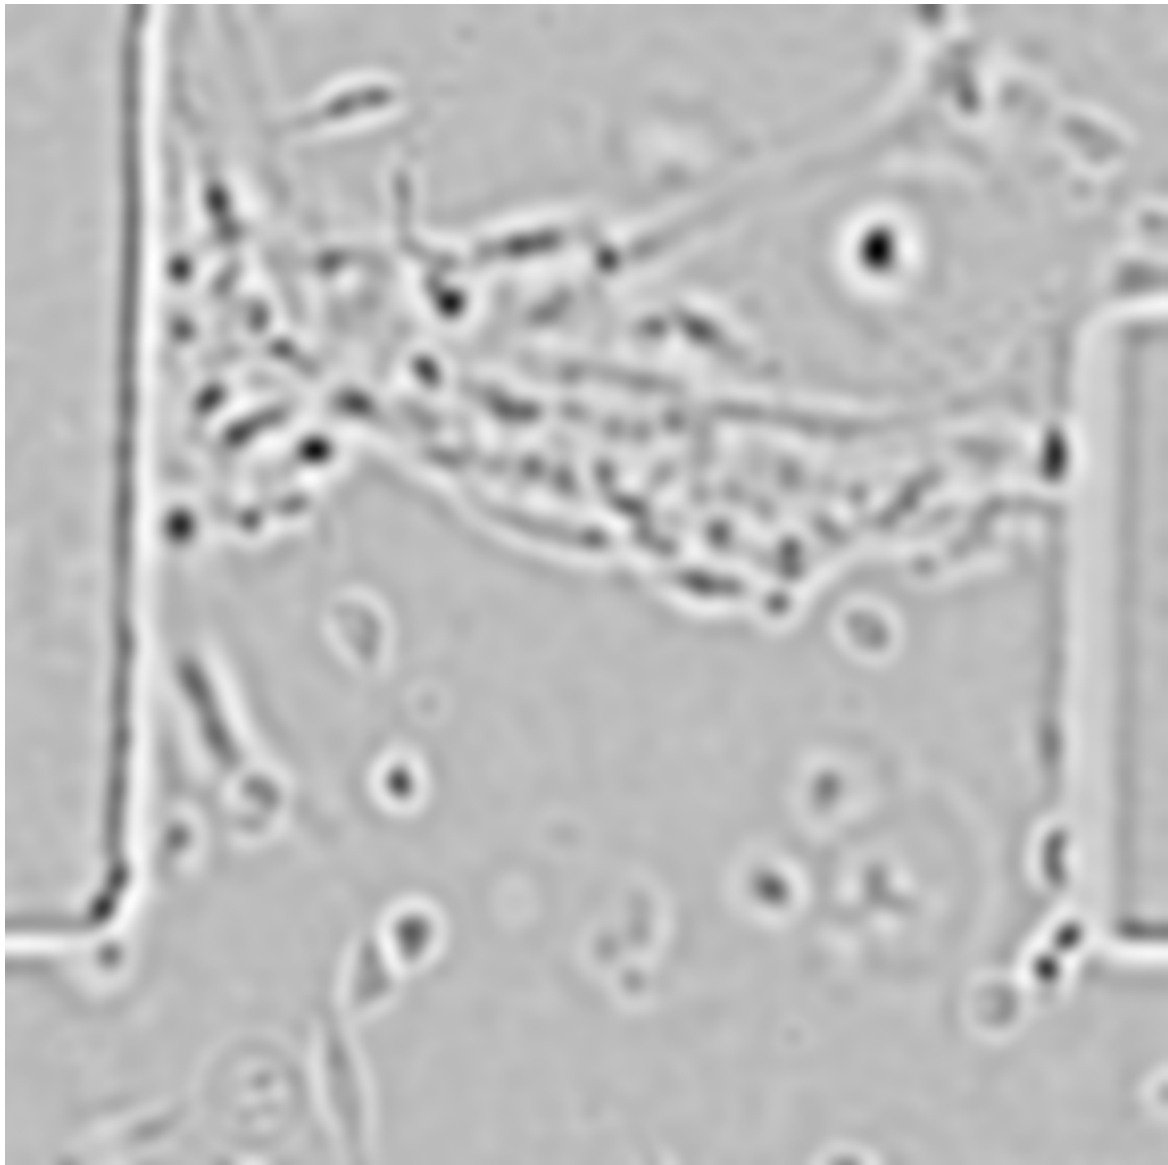


Fig. 2.3 Contiguous blobs of colour can be found using a Gaussian filter.

Chapter 3

Preparing images for segmentation

3.1 3D confocal imaging

3.2 Using GFP fluorescence data

3.3 Using Brightfield image data

3.4 Review of a study using Brightfield data

Chapter 4

Methodology

4.1 Definitions and assumptions

4.2 Generating zMod

4.3 Manual tracking

4.4 Generating zEdge for segmentation

4.5 Sensitivity analysis of zMod parameters

Chapter 5

Results

5.1 Image modification

5.1.1 zMod

5.1.2 zBF

5.1.3 zEdge

5.2 Segmentation

5.2.1 GFP segmentation

5.2.2 Brightfield variance segmentation

5.2.3 zEdge segmentation

5.2.4 Manual segmentation

Chapter 6

Discussion

6.1 zMod sensitivity to parameters and their effects on zBF

6.2 zEdge

6.3 Comparison of Brightfield variance and zEdge segmentation

6.3.1 Precision, Recall, and FScore

6.3.2 Results

Chapter 7

Conclusion

7.1 Summary

7.2 Future work

Appendix A

How to install L^AT_EX

Windows OS

TeXLive package - full version

1. Download the TeXLive ISO (2.2GB) from
<https://www.tug.org/texlive/>
2. Download WinCDEmu (if you don't have a virtual drive) from
<http://wincdemu.sysprogs.org/download/>
3. To install Windows CD Emulator follow the instructions at
<http://wincdemu.sysprogs.org/tutorials/install/>
4. Right click the iso and mount it using the WinCDEmu as shown in
<http://wincdemu.sysprogs.org/tutorials/mount/>
5. Open your virtual drive and run setup.pl

or

Basic MikTeX - T_EX distribution

1. Download Basic-MiK_TE_X(32bit or 64bit) from
<http://miktex.org/download>
2. Run the installer
3. To add a new package go to Start » All Programs » MikTeX » Maintenance (Admin)
and choose Package Manager

4. Select or search for packages to install

TexStudio - T_EX editor

1. Download TexStudio from
<http://texstudio.sourceforge.net/#downloads>
2. Run the installer

Mac OS X

MacTeX - T_EX distribution

1. Download the file from
<https://www.tug.org/mactex/>
2. Extract and double click to run the installer. It does the entire configuration, sit back and relax.

TexStudio - T_EX editor

1. Download TexStudio from
<http://texstudio.sourceforge.net/#downloads>
2. Extract and Start

Unix/Linux

TeXLive - T_EX distribution

Getting the distribution:

1. TeXLive can be downloaded from
<http://www.tug.org/texlive/acquire-netinstall.html>.
2. TeXLive is provided by most operating system you can use (rpm,apt-get or yum) to get TeXLive distributions

Installation

1. Mount the ISO file in the mnt directory

```
mount -t iso9660 -o ro,loop,noauto /your/texlive####.iso /mnt
```

2. Install wget on your OS (use rpm, apt-get or yum install)
3. Run the installer script install-tl.

```
cd /your/download/directory
./install-tl
```

4. Enter command 'i' for installation
5. Post-Installation configuration:
<http://www.tug.org/texlive/doc/texlive-en/texlive-en.html#x1-320003.4.1>
6. Set the path for the directory of TexLive binaries in your .bashrc file

For 32bit OS

For Bourne-compatible shells such as bash, and using Intel x86 GNU/Linux and a default directory setup as an example, the file to edit might be

```
edit ~/.bashrc file and add following lines
PATH=/usr/local/texlive/2011/bin/i386-linux:$PATH;
export PATH
MANPATH=/usr/local/texlive/2011/texmf/doc/man:$MANPATH;
export MANPATH
INFOPATH=/usr/local/texlive/2011/texmf/doc/info:$INFOPATH;
export INFOPATH
```

For 64bit OS

```
edit ~/.bashrc file and add following lines
PATH=/usr/local/texlive/2011/bin/x86_64-linux:$PATH;
export PATH
MANPATH=/usr/local/texlive/2011/texmf/doc/man:$MANPATH;
export MANPATH
```

```
INFOPATH=/usr/local/texlive/2011/texmf/doc/info:$INFOPATH;  
export INFOPATH
```

Fedora/RedHat/CentOS:

```
sudo yum install texlive  
sudo yum install psutils
```

SUSE:

```
sudo zypper install texlive
```

Debian/Ubuntu:

```
sudo apt-get install texlive texlive-latex-extra  
sudo apt-get install psutils
```

Appendix B

Installing the CUED class file

\LaTeX .cls files can be accessed system-wide when they are placed in the $\langle\text{texmf}\rangle/\text{tex}/\text{latex}$ directory, where $\langle\text{texmf}\rangle$ is the root directory of the user's \TeX installation. On systems that have a local texmf tree ($\langle\text{texmflocal}\rangle$), which may be named “ texmf-local ” or “ localtexmf ”, it may be advisable to install packages in $\langle\text{texmflocal}\rangle$, rather than $\langle\text{texmf}\rangle$ as the contents of the former, unlike that of the latter, are preserved after the \LaTeX system is reinstalled and/or upgraded.

It is recommended that the user create a subdirectory $\langle\text{texmf}\rangle/\text{tex}/\text{latex}/\text{CUED}$ for all CUED related \LaTeX class and package files. On some \LaTeX systems, the directory look-up tables will need to be refreshed after making additions or deletions to the system files. For \TeX Live systems this is accomplished via executing “ texhash ” as root. MikTeX users can run “ initexmf -u ” to accomplish the same thing.

Users not willing or able to install the files system-wide can install them in their personal directories, but will then have to provide the path (full or relative) in addition to the filename when referring to them in \LaTeX .

