





AI SG

Computer Vision

ImageNet Challenge

Top-5 error

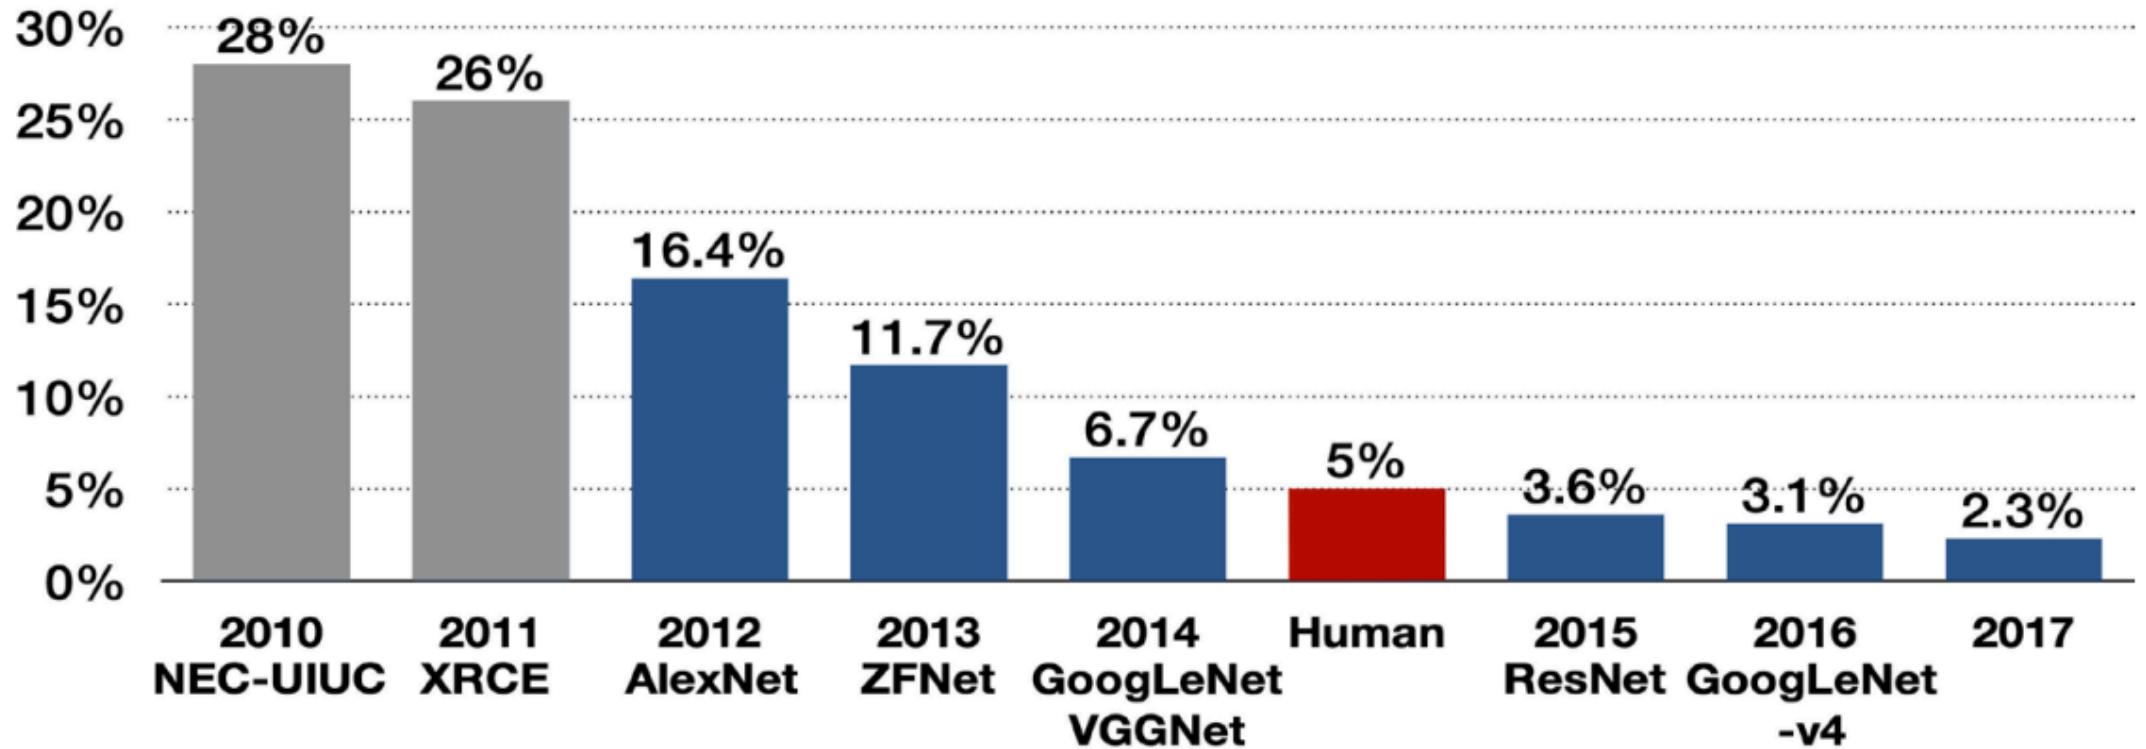

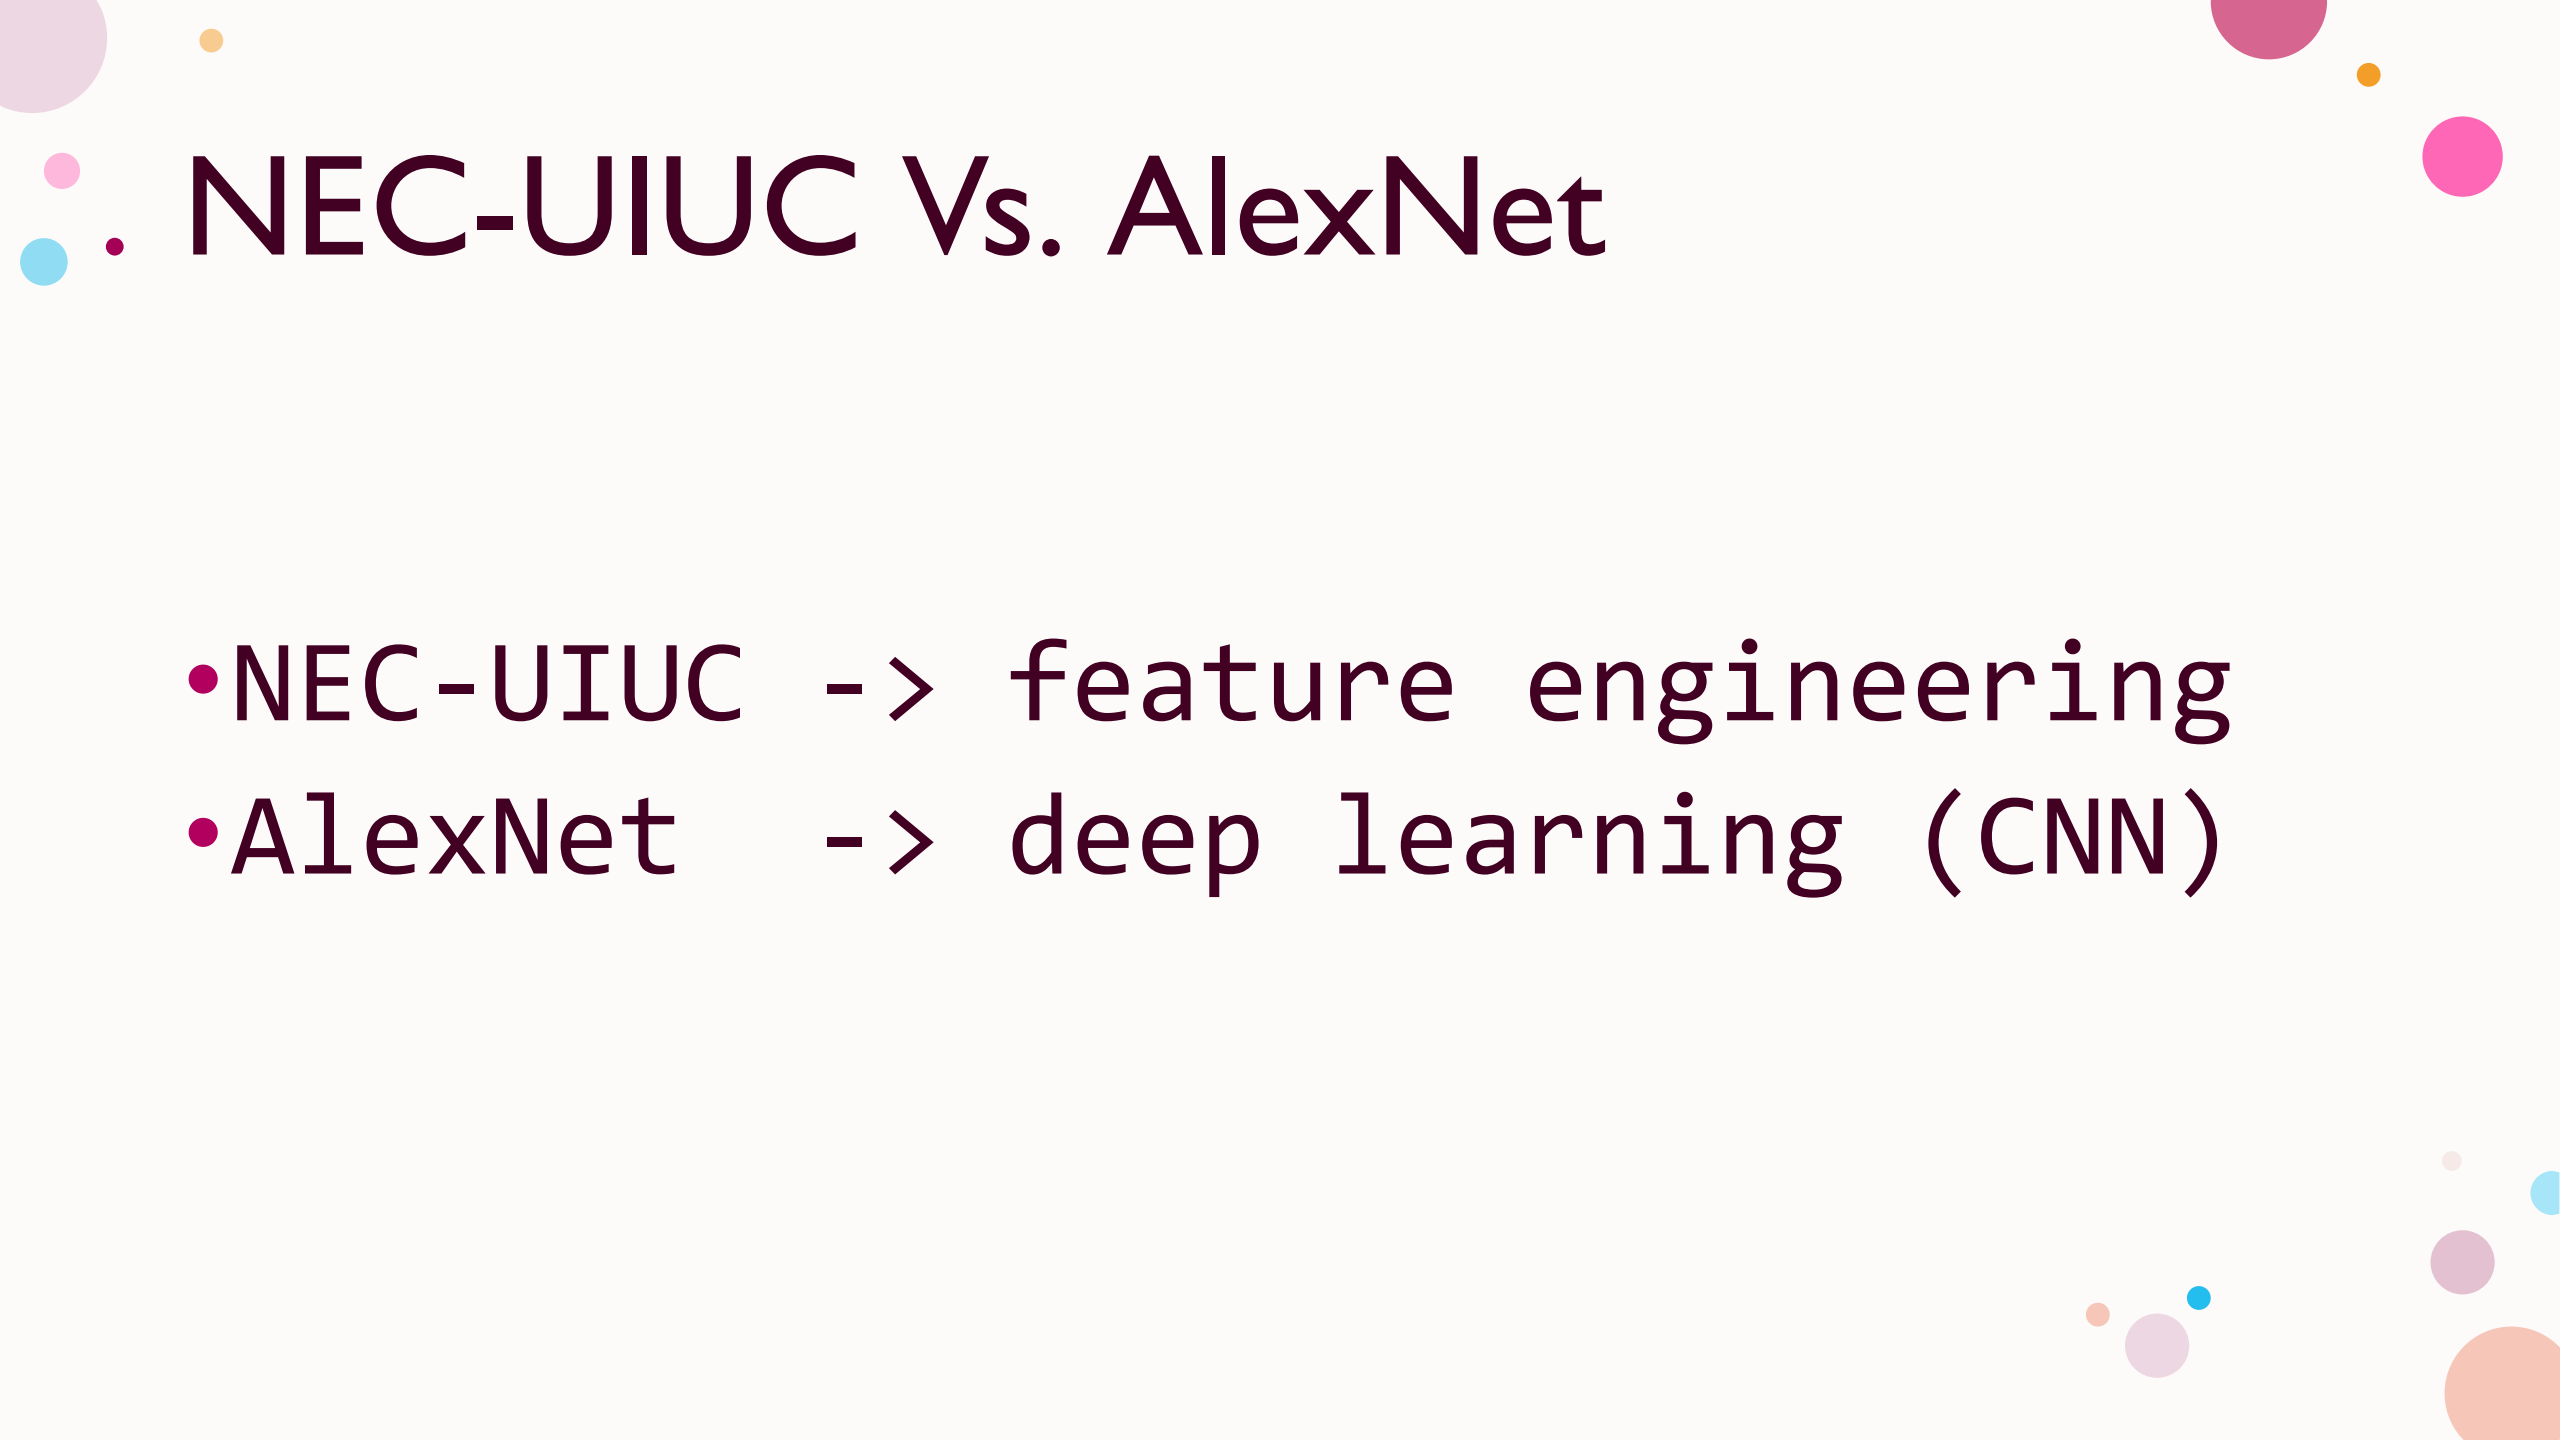

• NEC-UIUC Vs. AlexNet

- NEC-UIUC -> feature engineering
- AlexNet -> deep learning (CNN)

Overall Architecture


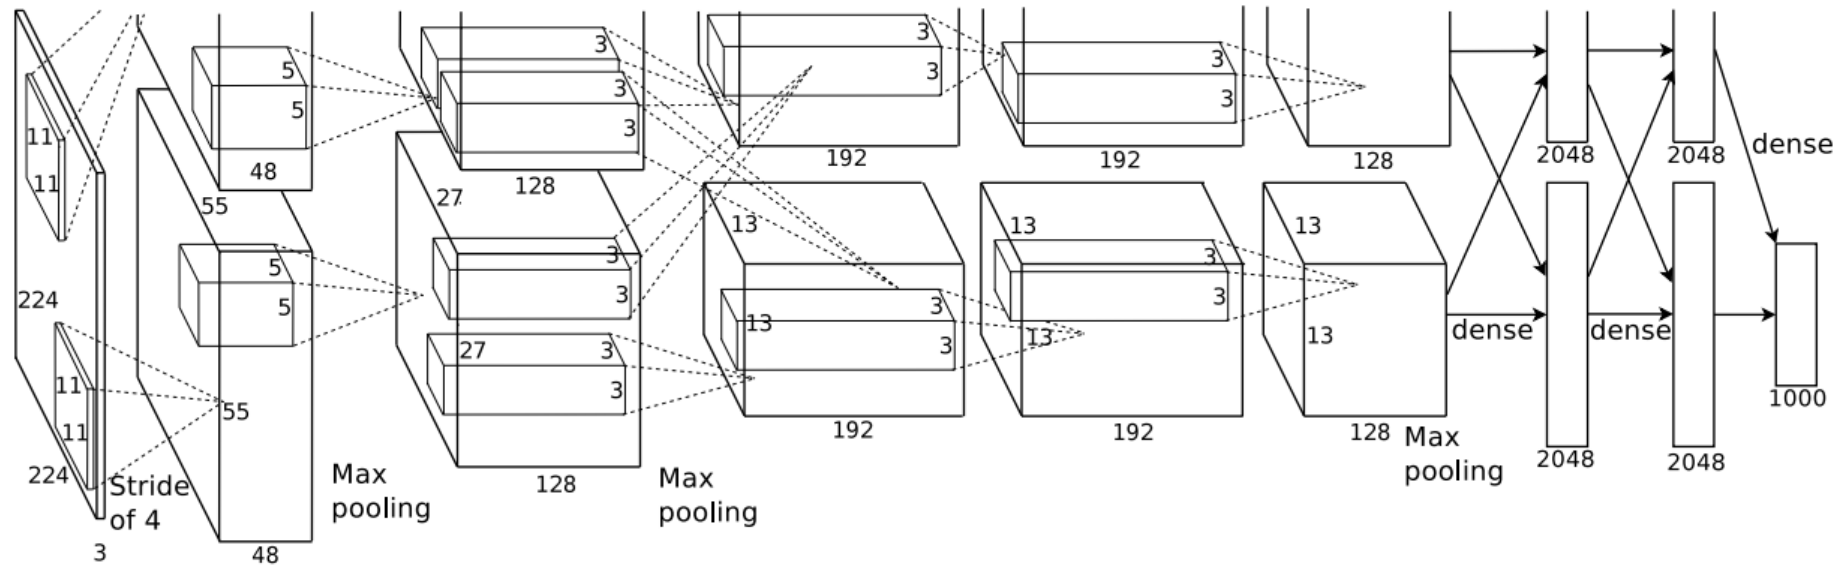



Figure 2: An illustration of the architecture of our CNN, explicitly showing the delineation of responsibilities between the two GPUs. One GPU runs the layer-parts at the top of the figure while the other runs the layer-parts at the bottom. The GPUs communicate only at certain layers. The network's input is 150,528-dimensional, and the number of neurons in the network's remaining layers is given by 253,440–186,624–64,896–64,896–43,264–4096–4096–1000.

ReLU Nonlinearity

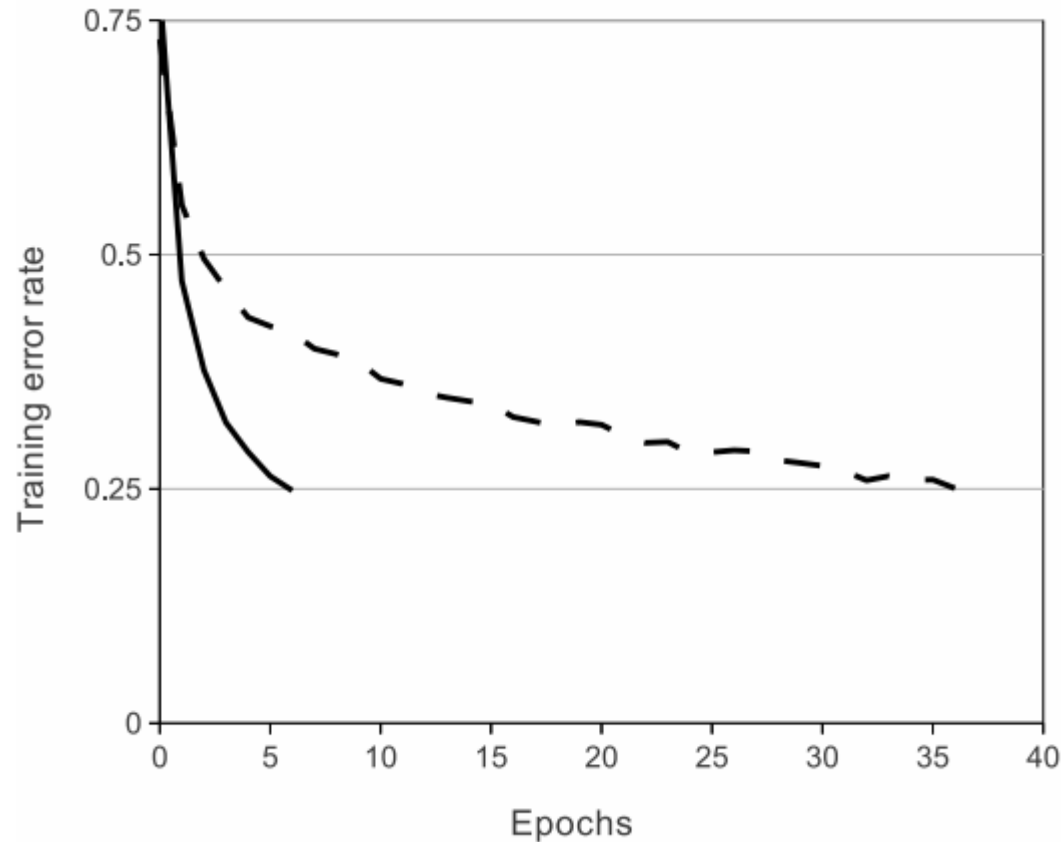


- Deep convolutional neural networks with ReLUs train several times faster than their equivalents with tanh units. This is demonstrated in Figure 1, which shows the number of iterations required to reach 25% training error on the CIFAR-10 dataset for a particular four-layer convolutional network.


Overlapping Pooling

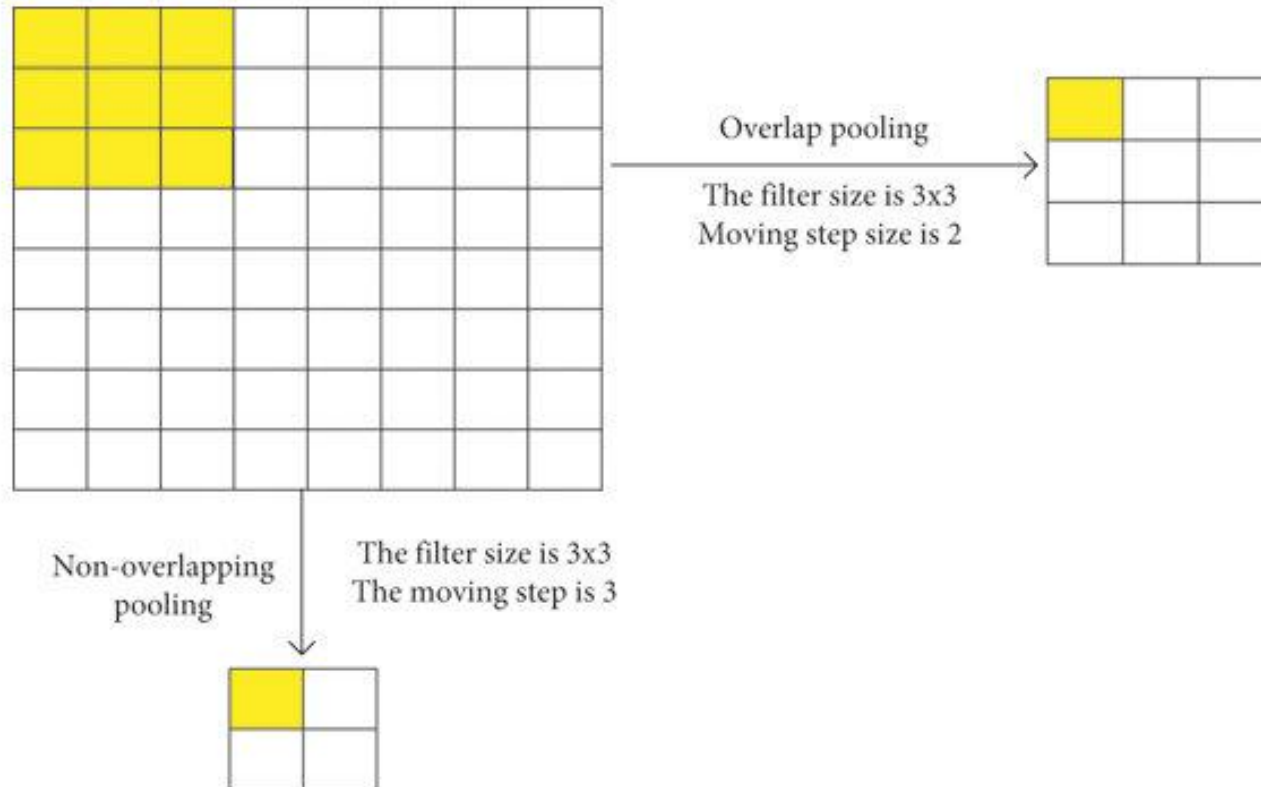

Non-overlapping pooling

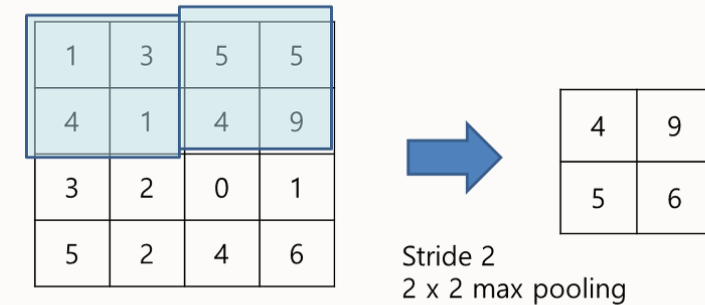

Overlapping pooling

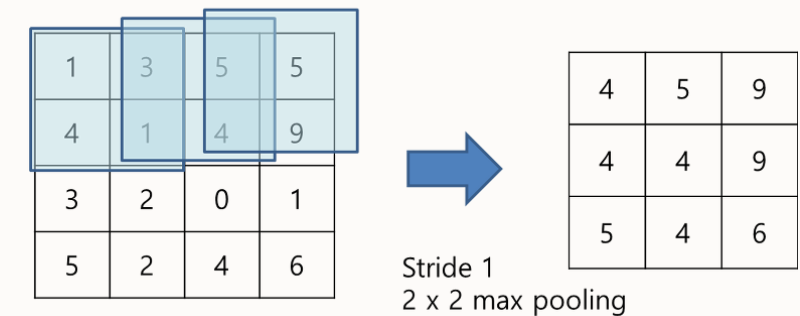




Reducing Overfitting


- Data Augmentation
- Dropout

Data Augmentation

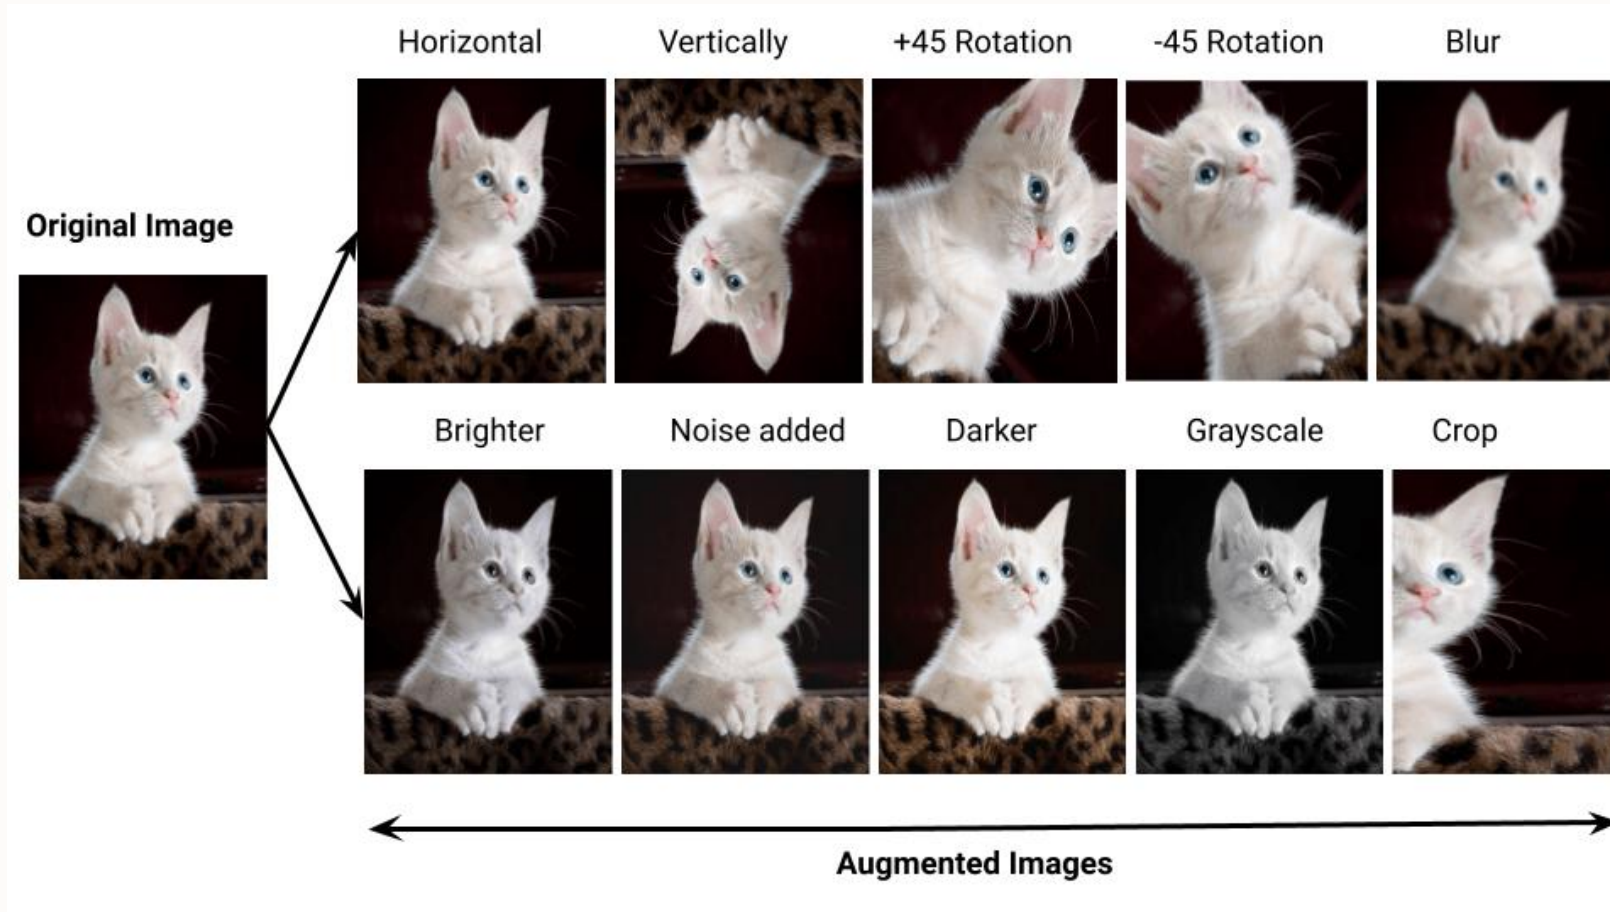

Dropout

- In the neural network, Dropout is implemented by modifying the structure of the neural network itself. For a certain layer of neurons, randomly delete some neurons with a defined probability, while keeping the individuals of the input layer and output layer neurons unchanged, and then update the parameters according to the learning method of the neural network. In the next iteration, rerandom Remove some neurons until the end of training.

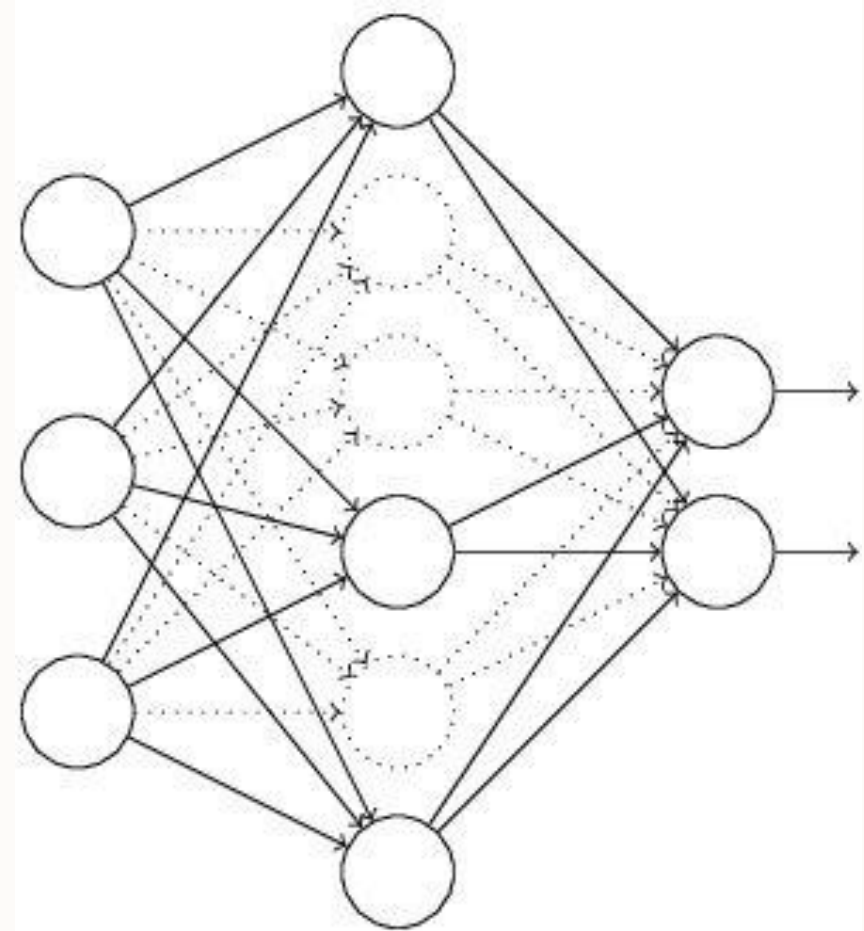

Details of learning


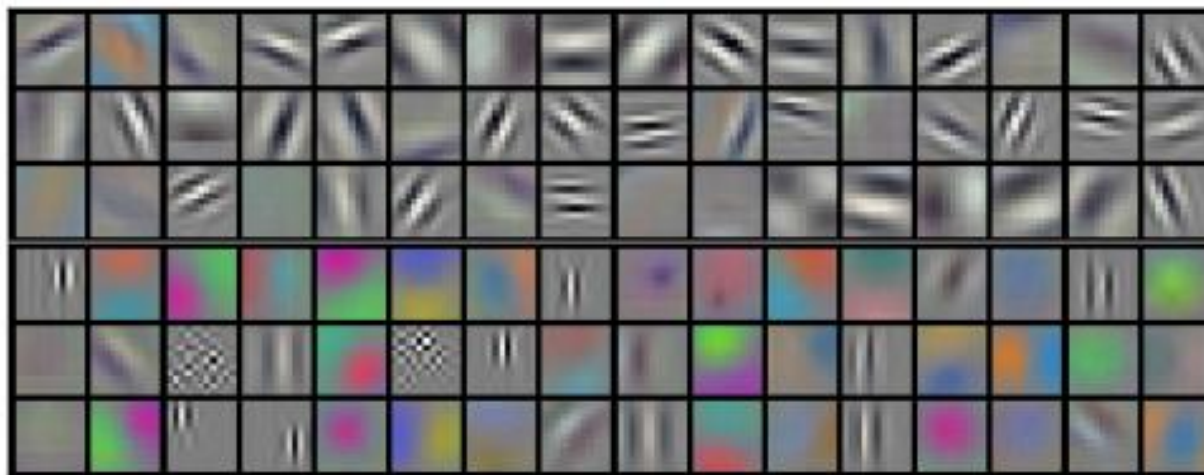


Figure 3: 96 convolutional kernels of size $11 \times 11 \times 3$ learned by the first convolutional layer on the $224 \times 224 \times 3$ input images. The

. Details of learning



Details of learning

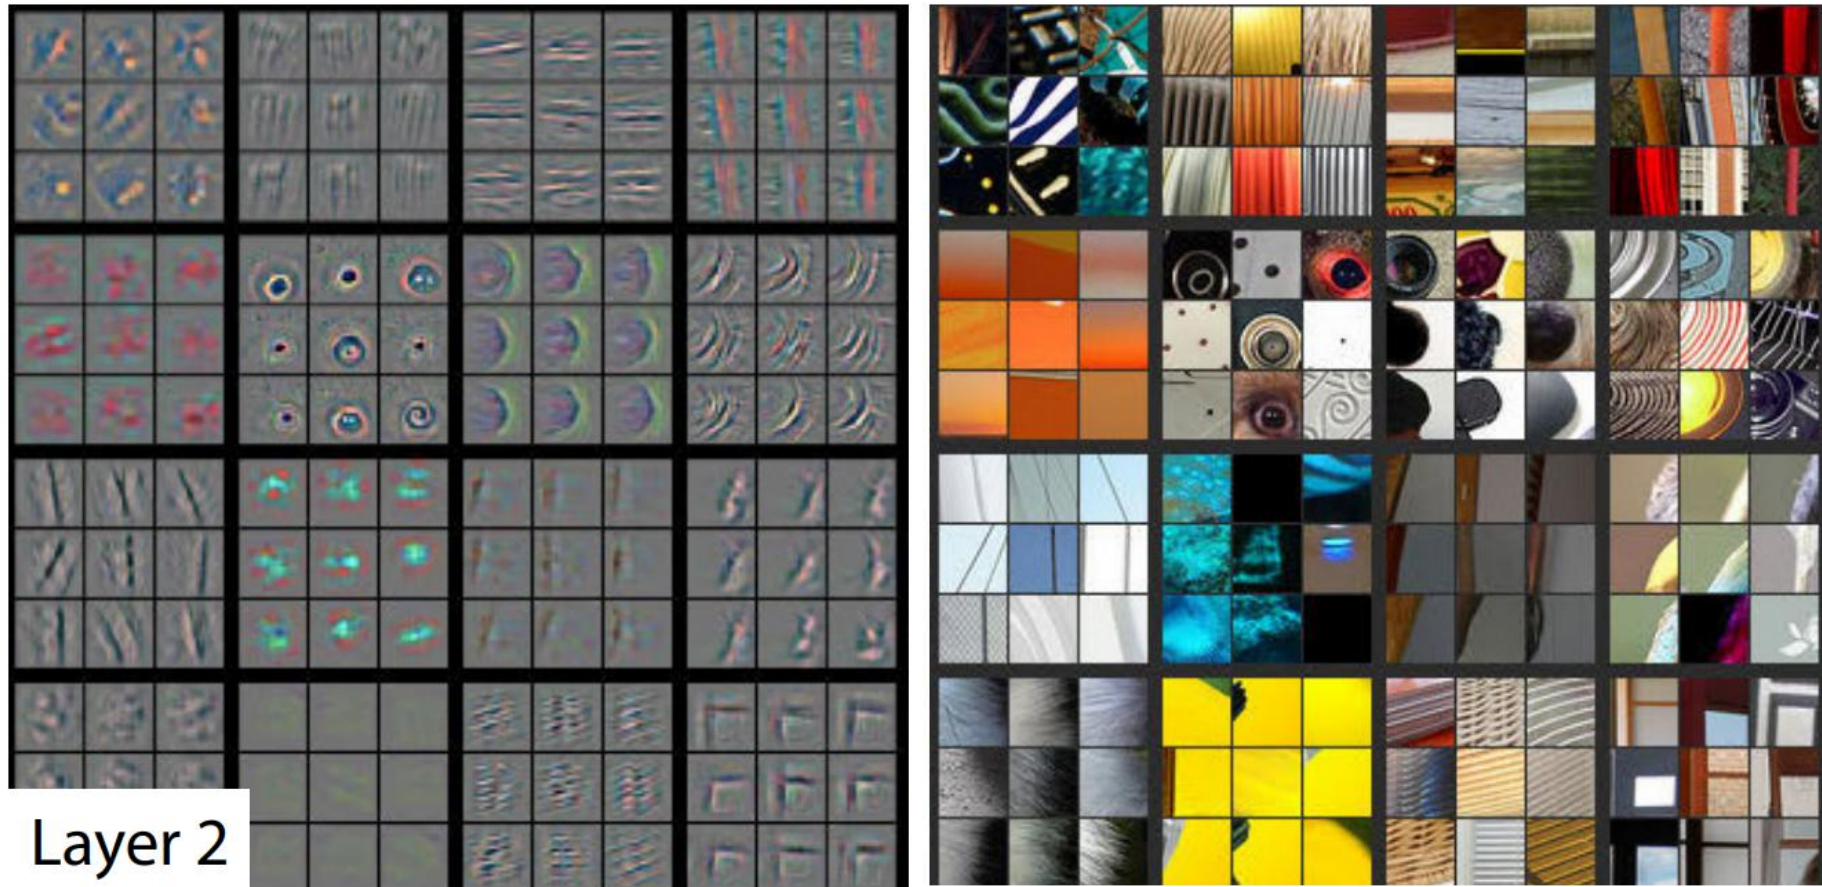