


# Example of Error Propagation for processTrainSchedule ()

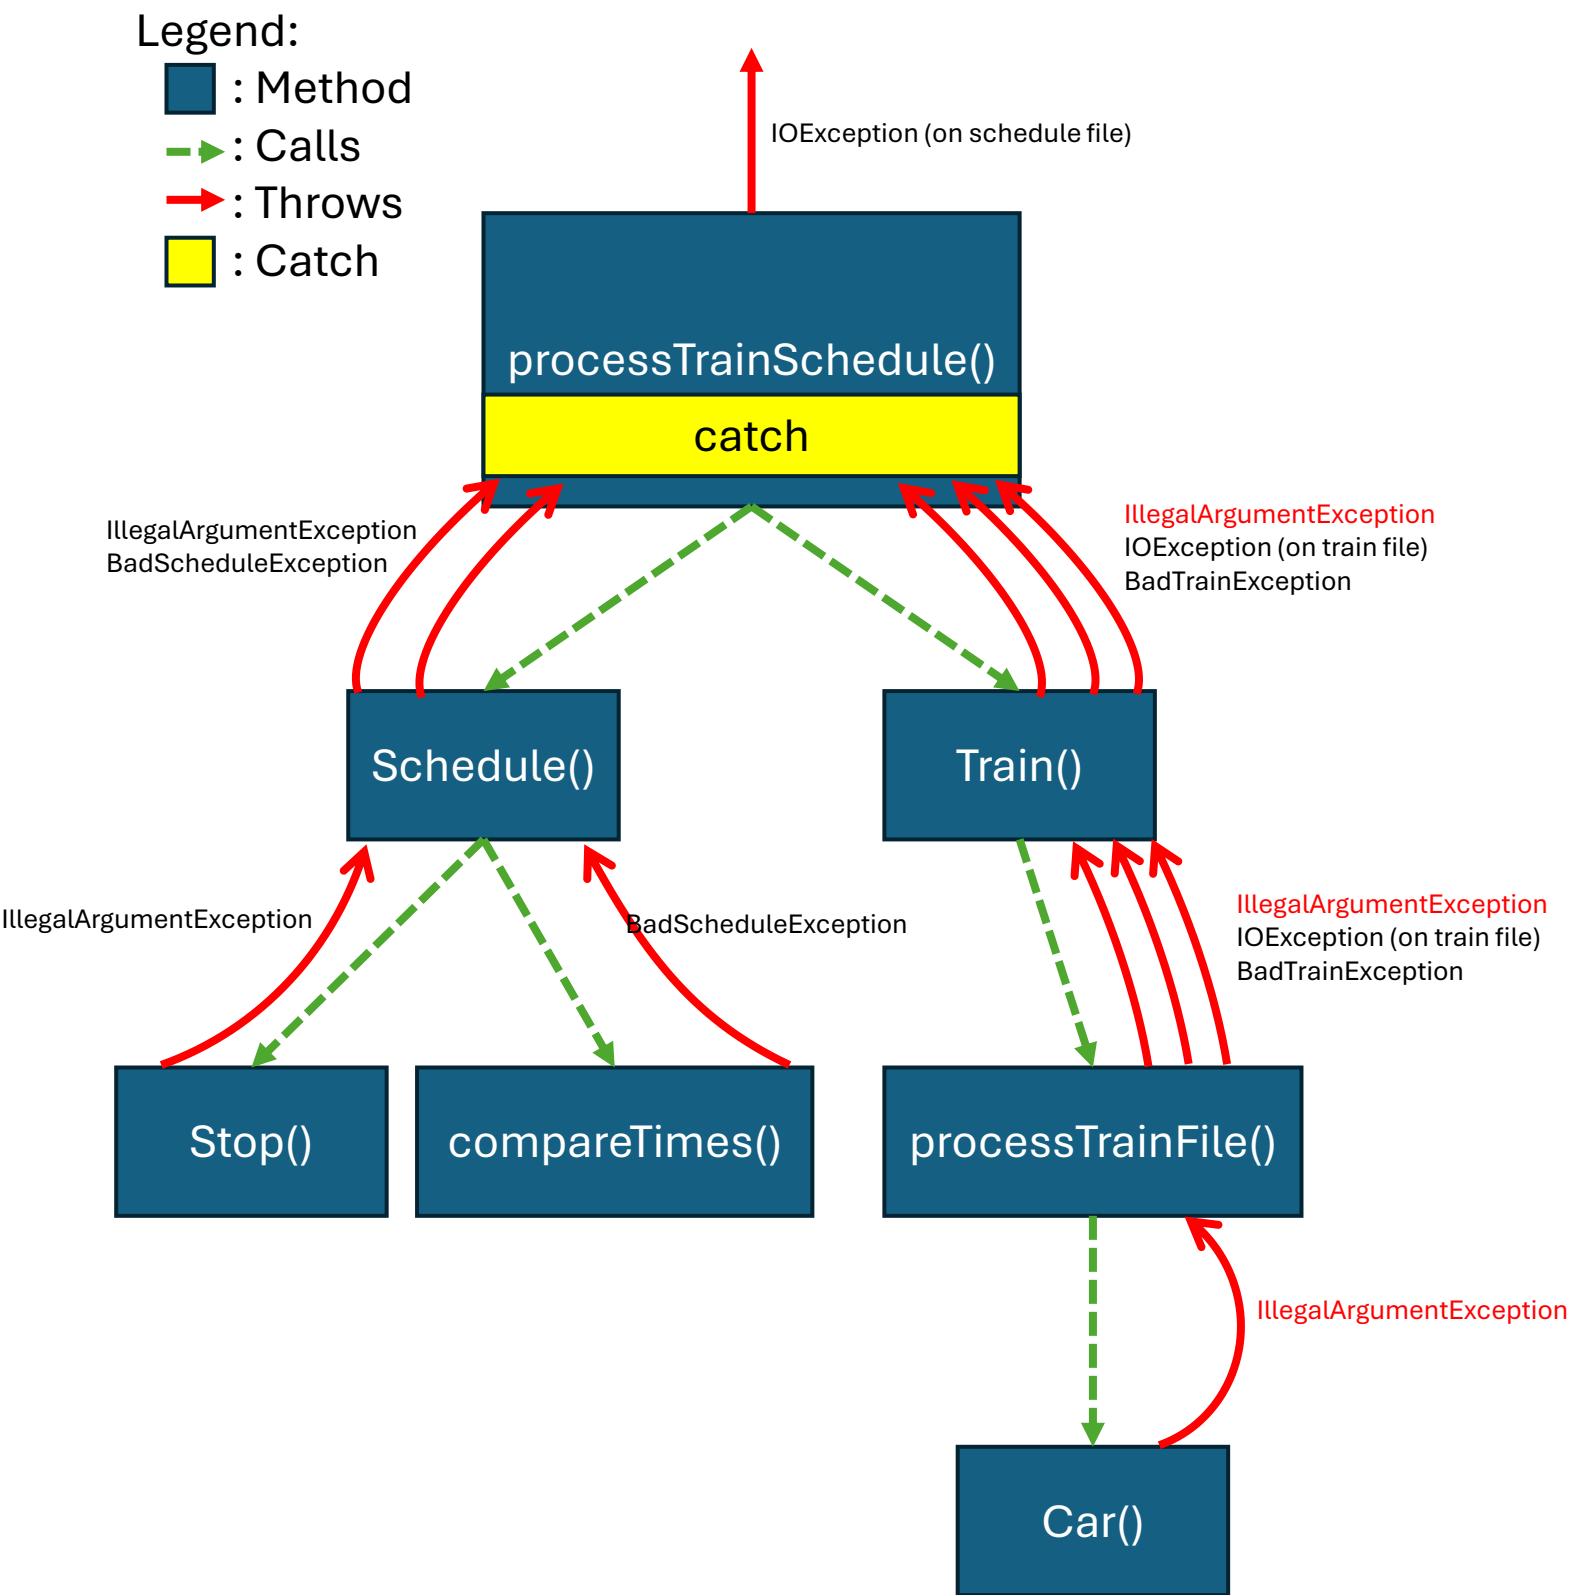

So, if the **constructor** of **Car** throws an **IllegalArgumentException**, that exception should be thrown up to its caller, **processTrainFile()** who then throws it up to the **constructor** of **Train** who in turn throws it up to its caller **processTrainSchedule ()**. **processTrainSchedule()** does not throw up the exception and instead just prints the message.