Code-Man: Progress Report

1. Map Design.

The map was redesigned to allow both walls and obstacles to be **modular**, enabling real-time editing and movement. Access to the maze is granted via a **Portal** located at the entrance. Upon interaction, the player is requested to grant specific **permissions** (`PERMISSION_TAKE_CONTROLS` and `PERMISSION_CONTROL_CAMERA`). These are essential for controlling the Pacman character and transitioning the camera to a **top-down orthographic perspective**, which ensures a clear view of the maze.

(the floor is the original pacman maze and help to maintain design accuracy)

2. Logic with linked message

Since LSL (Linden Scripting Language) does not support direct cross-script variable access (unlike the component-based architecture of engines like Unity), the system implements **Linked Messages** combined with **Remote Script**

Injection. This architecture creates a **programmable environment** for the player.

- **HUD Distribution:** Upon entry, the player receives a custom HUD.



- Player should open his inventory and wear this HUD. Its a very simple HUD with 2 buttons

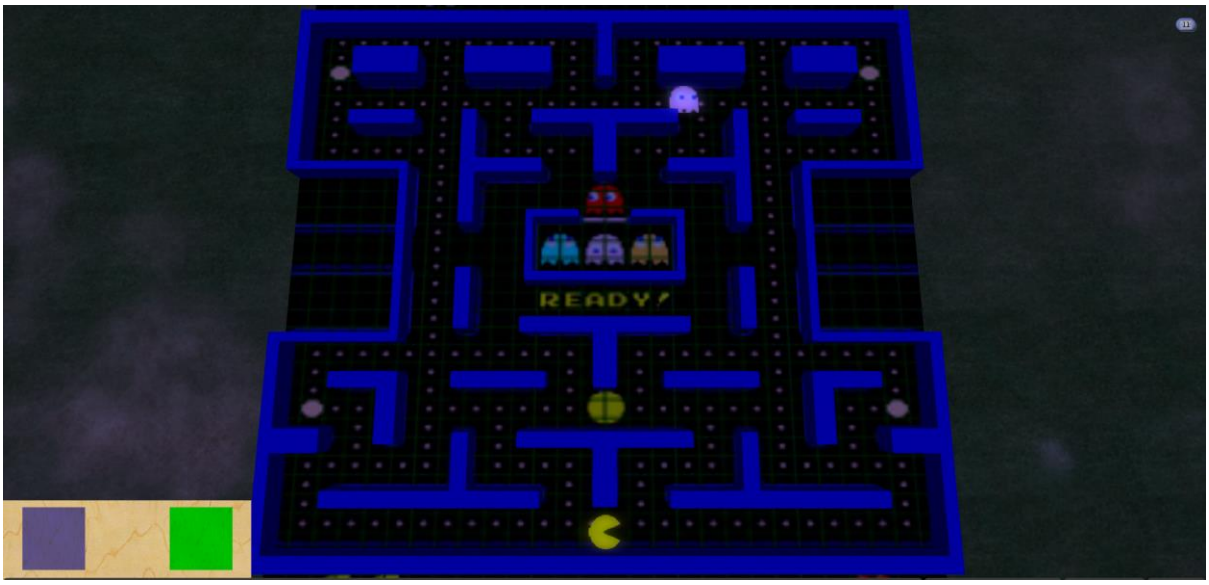

  - **Template Acquisition(blue button):** A 'Script Giver' button provides a template containing basic instructions and API calls.

```
// ==========================================================
// Instructions for the User:
// 1. Open this script from your Inventory.
// 2. Write your logic inside the touch_start event.
// 3. Click "Save".
// 4. Rename this script to "SlowEffect" in your Inventory.
// 5. Drag and drop the "SlowEffect" script into your HUD.
// 6. Click the "UPDATE LOGIC" button on your HUD.
// ==========================================================

default
{
    state_entry()
    {
        llSay( 0, "Script running");
    }
}
```

  - The player writes their custom logic, renames the script to `ExecScript`, and uploads it to the HUD's inventory(by drag and drop from his inventory to the HUD).
  - **Injection:** The 'Script Loader' (green button) button utilizes `llRemoteLoadScriptPin` to inject the player's code into the target

maze objects, where it communicates with the core engine via `link_message` events."

3. Ideas for code-man scripts

- **Terrain Terraforming:** Move walls (without overlapping each other) to trap ghosts
- **Mesh changer:** Make Pacman ghost for a few seconds to infiltrate with other ghosts and not chase him
- **Distraction:** Make the ghosts taunt and move torwards a corner
- **Scare the ghosts:** Make ghosts move in the opposite direction
- **Slow ghosts:** Slow ghosts for 5 seconds
- **Freeze:** Disable ghost movement for a few seconds
- **Super-Pacman:** Spawn at a random location a fruit that makes pacman invincible for 10 seconds.
- **Spawn a dummy:** Spawn a Pacman dummy in the maze to distract ghosts and move freely
- **Instant transmission:** Teleport in the maze
- **Energy replacement:** Write a script to fullfill your missing energy
- **Fusion with a ghost:** Create a new PacGhost that cannot be eaten and can eat ghosts