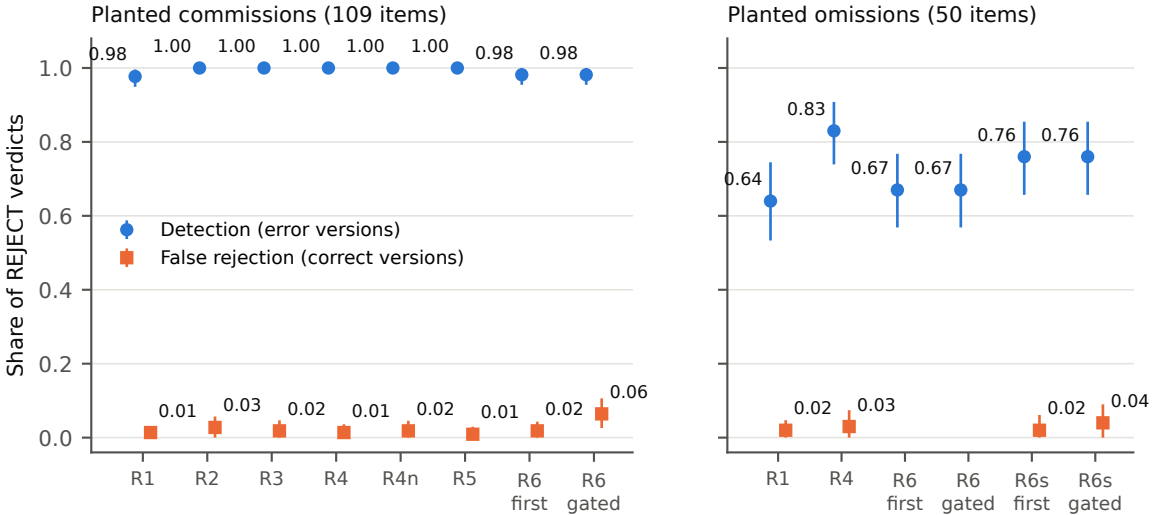

R1 = workflow context (cut); its correct-version counterpart is R0'. R6 and R6s: 'first' = model's first verdict, 'gated' = after the gate. 95% cluster bootstrap intervals. R6 on omissions ran on omission versions only, so it has no false-rejection point there.