

MySQL Week 7 Exercises

Background

The weekly exercises are designed to augment the video lessons. In the exercises, you will develop a menu-driven application in Java. This application will demonstrate how to perform CRUD (Create, Read, Update, and Delete) operations on a MySQL database.

You will be working in a Project schema (database) that contains do-it-yourself (DIY) projects. A DIY project contains project details, materials, steps, and categories. Below is a diagram of the tables and relationships in the Project schema. Don't worry at this point if you don't understand what the diagram is telling you. This will become clear soon. For now, just know that there are five tables in the Project schema: project, material, step, category, and project_category. This is what you will build in the exercises.



There will be a final project in this (MySQL) part of the back-end course. These exercises will help prepare you for that.

MySQL Week 7 Exercises

Instructions


Points possible: 75

URL to GitHub Repository: <https://github.com/NickSouvannalay/BE-Promineo-Tech>


URL to Public Link of your Video: <https://www.youtube.com/watch?v=xJlblbem-8g>

Instructions:

1. Follow the [Exercises](#) below to complete this assignment.

- In Eclipse, or an IDE of your choice, write the code that accomplishes the objectives listed below. Ensure that the code compiles and runs as directed.
- Create a new repository on GitHub for this week's assignment and push your completed code to this dedicated repo, including your entire Maven Project Directory (e.g., mysql-java) and any .sql files that you create.
- Include the screenshots into this Assignment Document indicated by: 
- Create a video showcasing your work:
 - In this video: record and present your project verbally while showing the results of the working project.
 - Easy way to Create a video: Start a meeting in Zoom, share your screen, open Eclipse with the code and your Console window, start recording & record yourself describing and running the program showing the results.
 - Your video should be a maximum of 5 minutes.
 - Upload your video with a public link.
 - Easy way to Create a Public Video Link: Upload your video recording to YouTube with a public link.

2. In addition, please include the following in your Coding Assignment Document:

- The requested screenshots, indicated by: 
- The URL for this week's GitHub repository.
- The URL of the public link of your video.

3. Save the Coding Assignment Document as a .pdf and do the following:

- Push the .pdf to the GitHub repo for this week.
 - Upload the .pdf to the LMS in your Coding Assignment Submission.
-


MySQL Week 7 Exercises

Objectives

In these exercises, you will:

- Use MySQL Workbench to create a schema and user.
- Use MySQL Workbench to assign schema privileges to a user.
- Create a Maven project in Eclipse.
- Add the MySQL driver as a dependency in pom.xml (Maven's Project Object Model – POM).
- Separate project concerns by creating packages.
- Write Java code to connect to a MySQL database and schema.

Important


In the exercises below, you will see this icon: . This means to take a screen shot or snip showing the results of the action or the code in the editor.

Exercises


In these exercises, you will use MySQL Workbench to create the project schema, as well as a user account. Then, you will create a Maven project. In the project you will write code to connect to the database schema that you created using MySQL Workbench.


Create the schema with MySQL Workbench


In this section, you will use MySQL Workbench to create the projects schema, which MySQL traditionally and unfortunately also calls a database. You will also create a user with privileges only for that schema. In other words, the user account that you will create can only access the tables in the projects schema and no others. This is a good practice in which a database account is only able to access the data it needs to perform its job. This step will help you accomplish that goal.

1. Open and log into MySQL Workbench.
2. Create a schema named "projects". Take a screen shot showing the projects schema.  Your snip should look something like this:

MySQL Week 7 Exercises

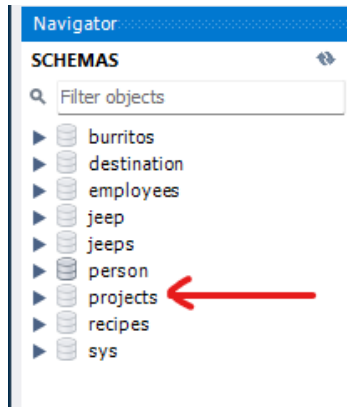

3. Create a user named "projects" and assign a password.
4. Add all privileges except "GRANT OPTION" . Your snip should look pretty much like this:

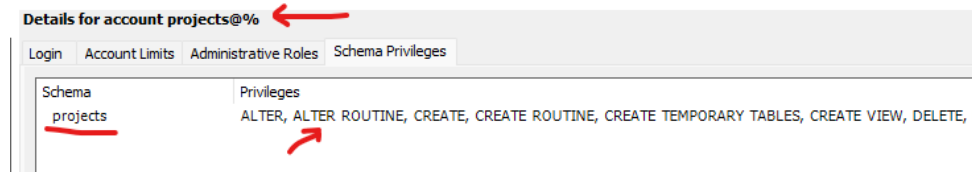

Create a Maven Project

Maven is a tool that is used to control the building of a Java project. Eclipse comes bundled with an internal version of Maven and the two tools have a tight integration. Maven has lots of features, but we will only be using it to add project dependencies. A project dependency is a library of code packaged as a Java Archive (JAR file). For our DIY project application, there is only one dependency required: the MySQL driver.

To create a new Maven project:

1. Click on the File menu in the top menu bar. Then select "New" / "Project". When the New Project wizard appears, expand "Maven". Select "New Maven Project" and click "Next".
2. Check the box, "Create a simple project (skip archetype selection)". Click "Next".
3. Enter the values in the table below into the fields and click "Finish".

Field	Value
Group ID	com.promineotech
Artifact ID	mysql-java

MySQL Week 7 Exercises

Version	0.0.1-SNAPSHOT
---------	----------------

4.

Modify pom.xml

Maven knows how to build projects (and provide project dependencies) based on configuration settings in an XML file named pom.xml. This file defines what Maven calls the Project Object Model (POM). The file is kept in the project root directory.

In this section, you will add a property with the correct Java version. You will then add the MySQL driver as a project dependency. Then, you will add a plugin that will use the Java version property to set the correct Java version.

In this section you will be working in pom.xml.


1. In this step you will add the Java version as a property in the Maven POM. You will set the value to 11 or 17 depending on the Java compiler version you have installed. To add the property:

- a. Create a `<properties>` section below the version element and inside the closing `</project>` tag. Add the closing `</properties>` tag below the opening tag.
- b. Inside the properties element, add the child element `<java.version></java.version>`. Inside the java.version element, set the version to 11 or 17. It should look like this:

```
<properties>  
  <java.version>11</java.version>  
</properties>
```

2. In this step, you will add the MySQL driver as a dependency in the dependencies section.
 - a. Below the `<properties>` element, create a new element named `<dependencies>` with the closing tag `</dependencies>` below it.
 - b. In a browser, navigate to <https://mvnrepository.com/>. Type "mysql" into the search box and press Enter.
 - c. Find "MySQL Connector/J" (most likely the first result) and click the link "mysql-connector-j". Click on the most recent version number link.
 - d. You will see a page with information about the dependency in a table followed by several tabs and a box with the dependency. Click in the box and the Maven dependency is copied to the clipboard.

MySQL Week 7 Exercises

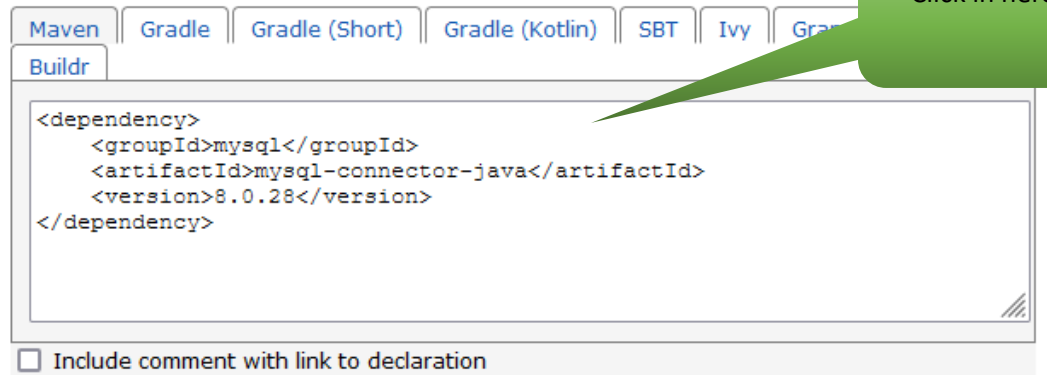

- e. Paste the contents of the clipboard into the <dependencies> section in pom.xml. The dependencies section should look like this:

```
<dependencies>
  <dependency>
    <groupId>mysql</groupId>
    <artifactId>mysql-connector-java</artifactId>
    <version>8.0.28</version>
  </dependency>
</dependencies>
```


3. In this step, you will need to add a section to the POM that tells Eclipse which compiler version to use when compiling your project. This is done by adding a definition for the Maven compiler plugin.

- a. In a browser, navigate to the Maven compiler usage page:
<https://maven.apache.org/plugins/maven-compiler-plugin/usage.html>.
- b. Find the section "Configuring Your Compiler Plugin". Copy the entire <build> section to the clipboard.
- c. Paste the clipboard contents into pom.xml below the <dependencies> section. Replace the XML comment inside the configuration element with a reference to the Java version defined in the properties section. To add a property reference, surround it with \${}. The section should look like this:

```
<build>
  <pluginManagement>
    <plugins>
      <plugin>
        <groupId>org.apache.maven.plugins</groupId>
        <artifactId>maven-compiler-plugin</artifactId>
        <version>3.8.1</version>
        <configuration>
          <source>${java.version}</source>
          <target>${java.version}</target>
        </configuration>
      </plugin>
    </plugins>
  </pluginManagement>
</build>
```


MySQL Week 7 Exercises

At this point, if you are hopelessly lost, refer to the solutions section below.

4. Take one or more screen shots to show all of pom.xml. 


Set up the project packages

In this section you will create the project structure by adding some packages. This will all be done in the Package Explorer panel in Eclipse.

1. Create the following packages and subpackages under src/main/java. Take a screen shot showing the package structure in Package Explorer. 

- a. projects
- b. projects.dao
- c. projects.entity
- d. projects.exception
- e. projects.service

Your screen shot should look like this:



Create an exception class


In this section you will create an exception class that will be used in the mysql-java project. This is an unchecked exception that will be used throughout the application. We do this because all of the exceptions thrown by the Java Database Connectivity (JDBC) API classes are checked `SQLException` objects. In coding the application, you will turn the checked exceptions into unchecked exceptions to keep your code clean.

In this section, you will create the class `DbException` in the `projects.exception` package.

1. In the `projects.exception` package, create a class named "DbException". This class must extend `RuntimeException`. Override the following constructors from the superclass:

```
public DbException(String message) {}  
public DbException(Throwable cause) {}  
public DbException(String message, Throwable cause) {}
```

Be sure to call the matching constructor in the superclass from each constructor in

`DbException`. Take a screen shot of the `DbException` class. 

MySQL Week 7 Exercises


Create the JDBC connection class

In this section, you will create a class that obtains a `JDBC Connection` object from the driver manager. When you call `DriverManager.getConnection()`, the driver manager looks up the MySQL driver and loads it. It then establishes a TCP connection between the application and a MySQL server. If the connection cannot be made for some reason, the driver manager throws a checked `SQLException`. This is converted to an unchecked exception in a `catch` block.

Follow these steps to create the `JDBC Connection` class.

1. Create a class in the `projects.dao` package named `DbConnection`. In the class, create the following constants: `HOST`, `PASSWORD`, `PORT`, `SCHEMA`, and `USER`. Set the constants to the correct values. If you followed the instructions above and created a user in MySQL Workbench, the constants should look like this:

```
private static String HOST = "localhost";
private static String PASSWORD = "projects";
private static int PORT = 3306;
private static String SCHEMA = "projects";
private static String USER = "projects";
```

2. In the `DbConnection` class, create a method named `getConnection()`. It should be `public` and `static` and should return a `java.sql.Connection` object. In the `getConnection()` method:
 - a. Create a `String` variable named `uri` that contains the MySQL connection URI.
 - b. Call `DriverManager` to obtain a connection. Pass the connection string (URI) to `DriverManager.getConnection()`.
 - c. Surround the call to `DriverManager.getConnection()` with a `try/catch` block. The `catch` block should catch `SQLException`.
 - d. Print a message to the console (`System.out.println`) if the connection is successful.
 - e. Print an error message to the console if the connection fails. Throw a `DbException` if the connection fails.
 - f. Create a screen shot of the entire class. 

Create the main class

Every Java application must have an entry point. This is a class with a `main()` method. In this section, you will create a class with a `main()` method. From the `main()` method you will temporarily call `DbConnection.getConnection()` to test that you can obtain a connection to the MySQL server.

Follow these steps to create the application entry point.

1. Create a class in the `projects` package named `ProjectsApp`. The class must have a `main()` method.
2. In the `main()` method, call the `DbConnection.getConnection()` method.

MySQL Week 7 Exercises

Run the Java application. Create a screen shot of the console showing that the connection succeeded.



Final touches

Typically, when you push a project to GitHub, you only want to push source code, not built class files or extra configuration files maintained by a tool such as Eclipse. In a Maven project, all built classes are put in subdirectories off of the `target` directory. So, the `target` directory should not be pushed to GitHub.

Likewise, Eclipse maintains its project configuration in a directory named `".settings"`. This directory should also not be pushed to GitHub.

To exclude files or directories from being pushed to GitHub, put the directory and file names into a file named `.gitignore`. This file must be in the project root directory. Simply put the paths of the files or directories on separate lines in `.gitignore` to tell git to ignore these files or directories.

To ignore files, put the file name relative to the project root. Separate directory names with slashes (`"/"`). To ignore directories, put the directory name on a separate line in `.gitignore` and add a slash (`"/"`) on the end.

Follow these steps to instruct git to ignore the `.settings` directory and the `target` directory.

1. In the root of the Eclipse project, create a file named `".gitignore"`. It should contain the following lines:

```
.settings/  
target/
```

MySQL Week 7 Exercises

Solutions

pom.xml

```
<project
  xmlns="http://maven.apache.org/POM/4.0.0"
  xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance"
  xsi:schemaLocation="
    http://maven.apache.org/POM/4.0.0
    https://maven.apache.org/xsd/maven-4.0.0.xsd">
  <modelVersion>4.0.0</modelVersion>

  <groupId>com.promineotech</groupId>
  <artifactId>mysql-java</artifactId>
  <version>0.0.1-SNAPSHOT</version>

  <properties>
    <java.version>11</java.version>
  </properties>

  <dependencies>
    <dependency>
      <groupId>mysql</groupId>
      <artifactId>mysql-connector-java</artifactId>
      <version>8.0.27</version>
    </dependency>
  </dependencies>

  <build>
    <pluginManagement>
      <plugins>
        <plugin>
          <groupId>org.apache.maven.plugins</groupId>
          <artifactId>maven-compiler-plugin</artifactId>
          <version>3.8.1</version>
          <configuration>
            <source>${java.version}</source>
            <target>${java.version}</target>
          </configuration>
        </plugin>
      </plugins>
    </pluginManagement>
  </build>
</project>
```

MySQL Week 7 Exercises

DbConnection.java

```
package projects.dao;

import java.sql.Connection;
import java.sql.DriverManager;
import java.sql.SQLException;
import projects.exception.DbException;

public class DbConnection {
    private static String HOST = "localhost";
    private static String PASSWORD = "projects";
    private static int PORT = 3306;
    private static String SCHEMA = "projects";
    private static String USER = "projects";

    public static Connection getConnection() {
        String uri = String.format("jdbc:mysql://%s:%d/%s?user=%s&password=%s", HOST, PORT, SCHEMA,
            USER, PASSWORD);

        try {
            Connection conn = DriverManager.getConnection(uri);
            System.out.println("Connection to schema " + SCHEMA + " is successful.");
            return conn;
        } catch (SQLException e) {
            System.out.println("Unable to get connection at " + uri);
            throw new DbException("Unable to get connection at " + uri);
        }
    }
}
```

ProjectsApp.java

```
package projects;

/**
 * @author Promineo
 */
public class ProjectsApp {

    /**
     * @param args
     */
    public static void main(String[] args) {
    }

}
```

.gitignore

.settings/
target/

MySQL Week 7 Exercises

DbException.java

```
package projects.exception;


@SuppressWarnings("serial")
public class DbException extends RuntimeException {

    public DbException(String message) {
        super(message);
    }

    public DbException(Throwable cause) {
        super(cause);
    }

    public DbException(String message, Throwable cause) {
        super(message, cause);
    }
}
```

MySQL Week 7 Exercises

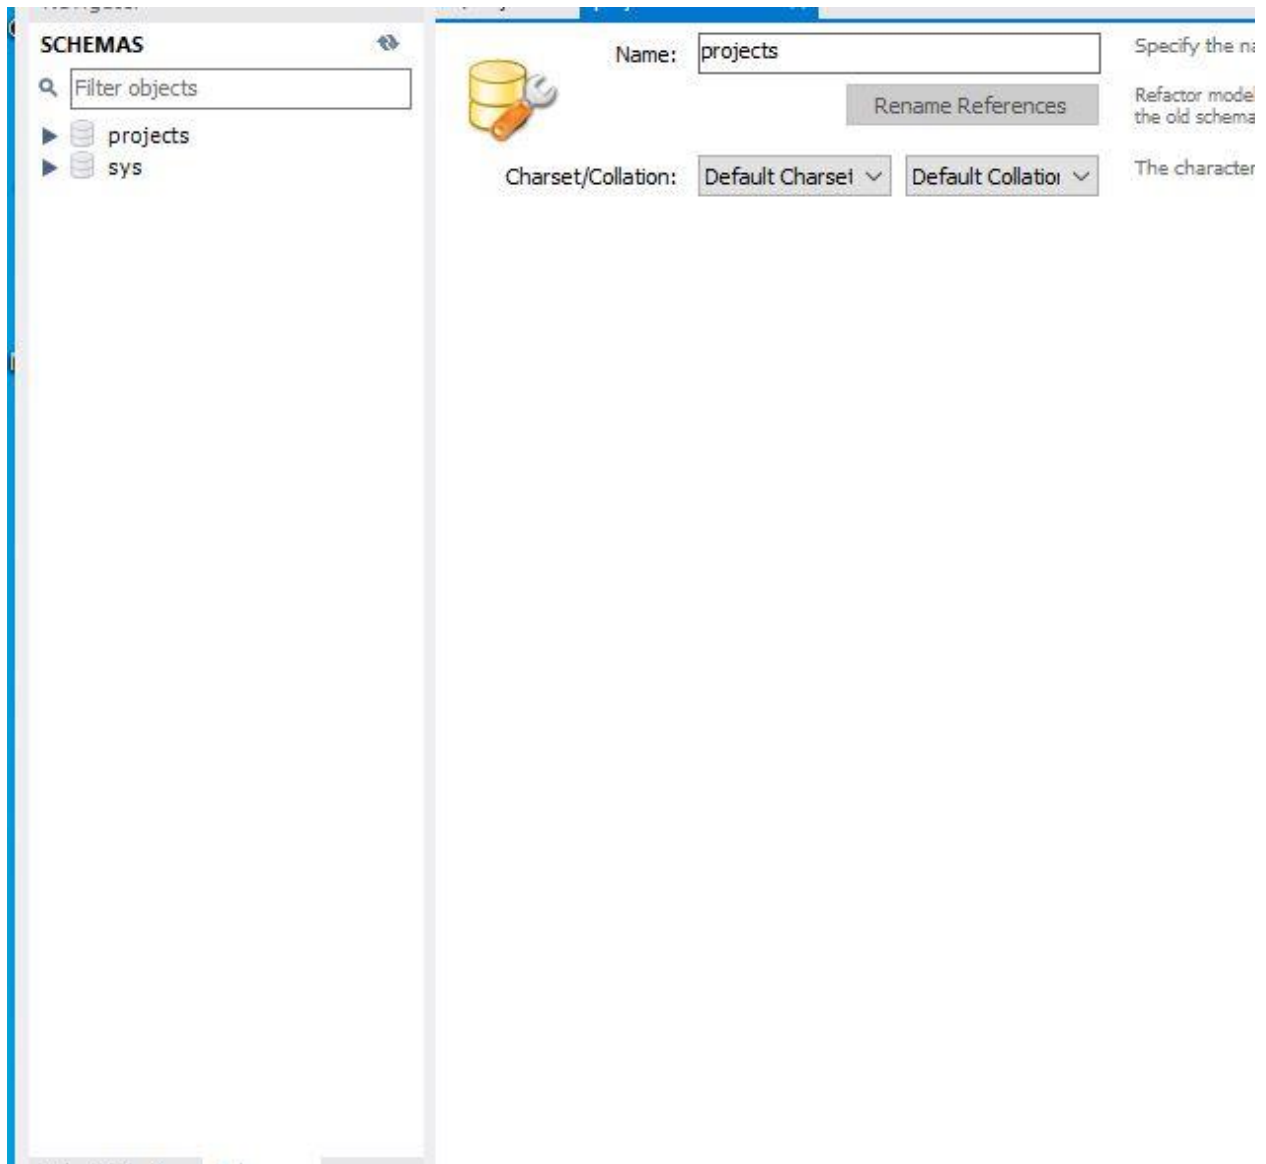

MySQL Week 7 Exercises

MANAGEMENT

Server Status

Client Connections

Users and Privileges

Status and System Variables

Data Export

Data Import/Restore

INSTANCE

Startup / Shutdown

Server Logs

Options File

PERFORMANCE

Dashboard

Performance Reports

Performance Schema Setup

Local instance MySQL80

Users and Privileges

User Accounts

User	From Host
mysql.infoschema	localhost
mysql.session	localhost
mysql.sys	localhost
projects	%
root	localhost

Details for account projects@%

Login

Account Limits

Administrative Roles

Schema Privileges

Schema

Privileges

projects

ALTER, ALTER ROUTINE, CREATE, CREATE ROUTINE, CREATE TEMPORARY TABLES, CREATE VIEW, DE

<

>

Schema and Host fields may use % and _ wildcards.

The server will match specific entries before wildcarded ones.

Revoke All Privileges

Delete Entry

Add Entry...

Object Rights

DDL Rights

Other Rights

☐ SELECT

☐ INSERT

☐ UPDATE

☐ DELETE

☐ EXECUTE

☐ SHOW VIEW

☐ CREATE

☐ ALTER

☐ REFERENCES

☐ INDEX

☐ CREATE VIEW

☐ CREATE ROUTINE

☐ ALTER ROUTINE

☐ EVENT

☐ DROP

☐ TRIGGER

☐ GRANT OPTION

☐ CREATE TEMPORARY TABLES

☐ LOCK TABLES

Unselect All

Select "ALL"

Add Account

Delete

Refresh

Revert

Apply

Administration













Schemas

Information

No object selected

MySQL Week 7 Exercises

```
1<project xmlns="http://maven.apache.org/POM/4.0.0" xmlns:xsi="http://www.w3.org/2001/XMLSchema-instance" xsi:schemaLocation="http://maven.apache.org/POM/4.0.0 https://maven.apache.org/xsd/maven-4.0.0.xsd">
2  <modelVersion>4.0.0</modelVersion>
3  <groupId>com.promineotech</groupId>
4  <artifactId>mysql-java</artifactId>
5  <version>0.0.1-SNAPSHOT</version>
6  <properties>
7    <java.version>11</java.version>
8  </properties>
9  <dependencies>
10    <dependency>
11      <groupId>mysql</groupId>
12      <artifactId>mysql-connector-java</artifactId>
13      <version>8.0.31</version>
14    </dependency>
15  </dependencies>
16  <build>
17    <pluginManagement>
18      <plugins>
19        <plugin>
20          <groupId>org.apache.maven.plugins</groupId>
21          <artifactId>maven-compiler-plugin</artifactId>
22          <version>3.10.1</version>
23        </plugin>
24        <plugin>
25          <groupId>org.apache.maven.plugins</groupId>
26          <artifactId>maven-resources-plugin</artifactId>
27          <version>3.1.0</version>
28        </plugin>
29      </plugins>
30    </pluginManagement>
31  </build>
</project>
```

- ▼  src/main/java
 -  projects
 -  projects.dao
 -  projects.entity
 -  projects.exception
 -  projects.service
-  src/main/resources
-  src/test/java
-  src/test/resources
- >  JRE System Library [J2SE-1.5]
- >  Maven Dependencies
- >  src

MySQL Week 7 Exercises

```
1 package projects.exception;
2
3 @SuppressWarnings("serial")
4 public class DbException extends RuntimeException {
5
6     public DbException() {}
7
8     public DbException(String message) {
9         super(message);
10    }
11
12    public DbException(Throwable cause) {
13        super(cause);
14    }
15
16    public DbException(String message, Throwable cause) {
17        super(message, cause);
18    }
19
20 }
21
22 }
```

```
1 package projects.dao;
2
3 import java.sql.Connection;
4
5 public class DbConnection {
6
7     private static final String HOST = "localhost";
8     private static final String PASSWORD = "projects";
9     private static final int PORT = 3306;
10    private static final String SCHEMA = "projects";
11    private static final String USER = "projects";
12
13    public static Connection getConnection() {
14        String uri =
15            String.format("jdbc:mysql://%s:%d/%s?user=%s&password=%s&useSSL=false",
16                HOST, PORT, SCHEMA, USER, PASSWORD);
17        System.out.println("Connecting with uri = " + uri);
18
19        try {
20            Connection conn = DriverManager.getConnection(uri);
21            System.out.println("Successfully obtained connection!");
22            return conn;
23        } catch (SQLException e) {
24            System.err.println("Error getting connection.");
25            throw new DbException(e);
26        }
27    }
28
29 }
```


MySQL Week 7 Exercises

```
<terminated> ProjectsApp [Java Application] C:\Users\Riko\p2\pool\plugins\org.eclipse.justopenjdk.hotspot.jre.full.win32.x86_64_17.0.4.v20220903-1038\jre\bin\javaw.exe (Oct 22, 2022, 5:13:38 PM - 5:13:39 PM) [pid: 8912]  
Connecting with url = jdbc:mysql://localhost:3306/projects?user=projects&password=projects&useSSL=false  
Successfully obtained connection!
```