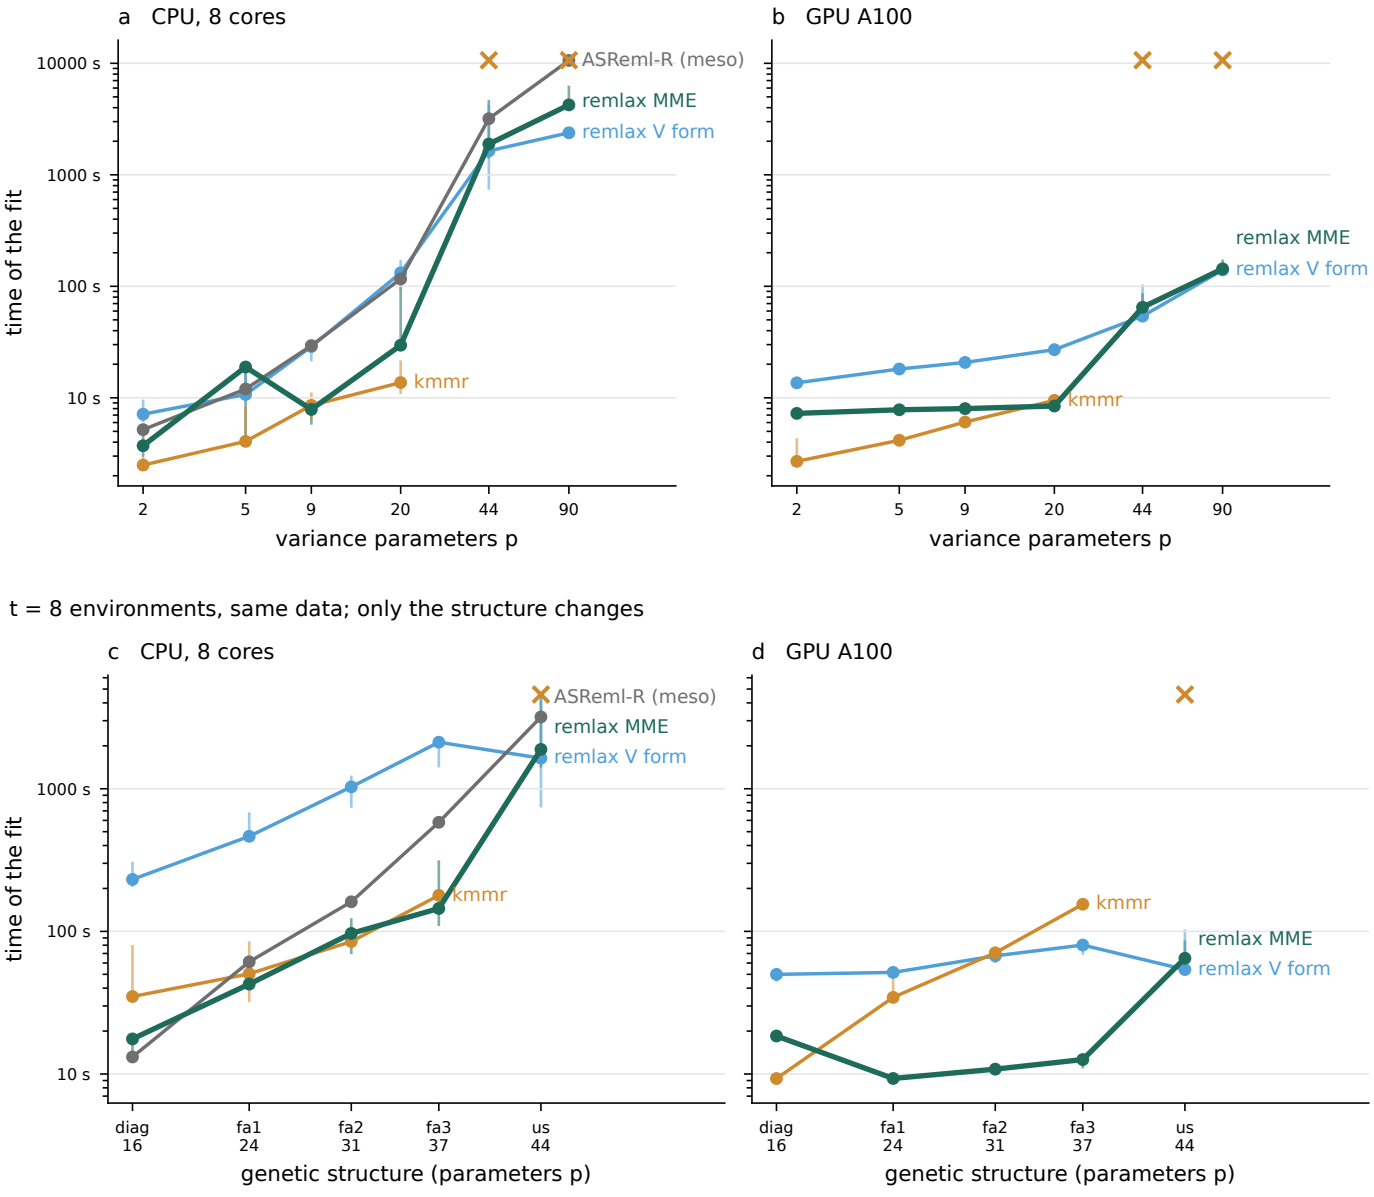
us(t) for t = 1 to 12 environments; n and dim(C) grow with t
a CPU, 8 cores
b GPU A100
time of the fit
10000 s
1000 s
100 s
10 s
ASReml-R (meso)
remlax MME
remlax V form
kmmr
2
5
9
20
44
90
variance parameters p
t = 8 environments, same data; only the structure changes
c CPU, 8 cores
d GPU A100
diag
16
fa1
24
fa2
31
fa3
37
us
44
genetic structure (parameters p)
× failed fit △ 6 h limit exceeded | range of the replicates (median plotted). kmmr and remlax on genotoul; ASReml-R on a reserved meso node.