


Token-Based Algorithm on Ring Topology

Assignment 04



1


DME for Ring Topology

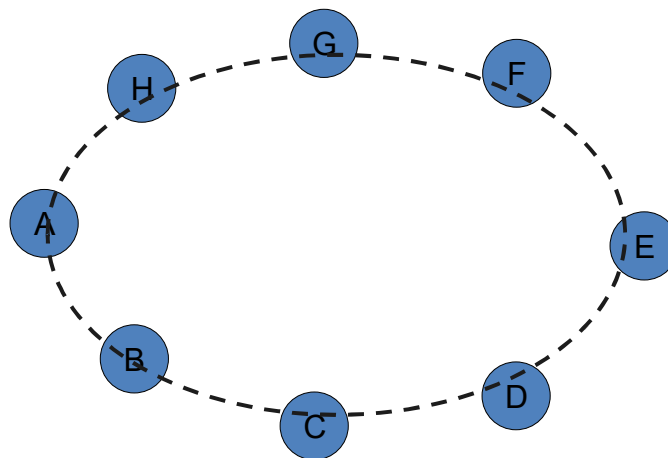

8 May 2025

2


DME for Ring Topology

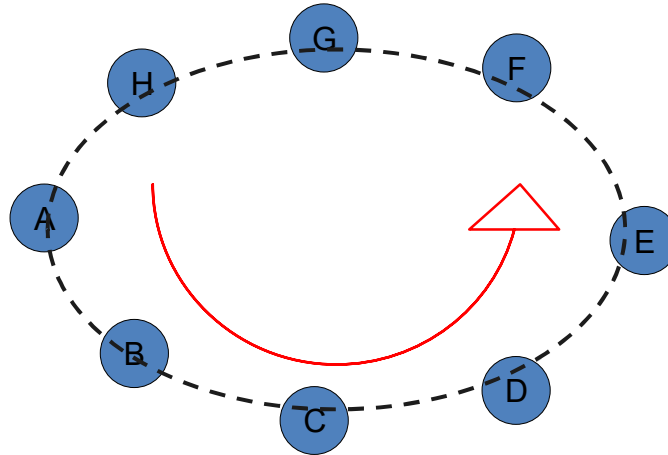

8 May 2025

3


DME for Ring Topology

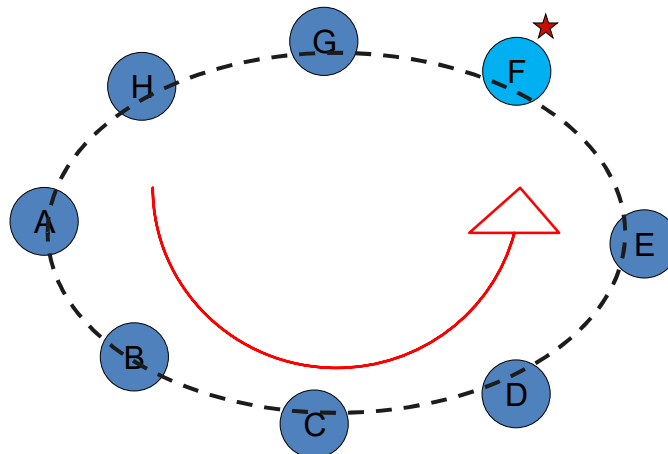

8 May 2025

4


DME for Ring Topology

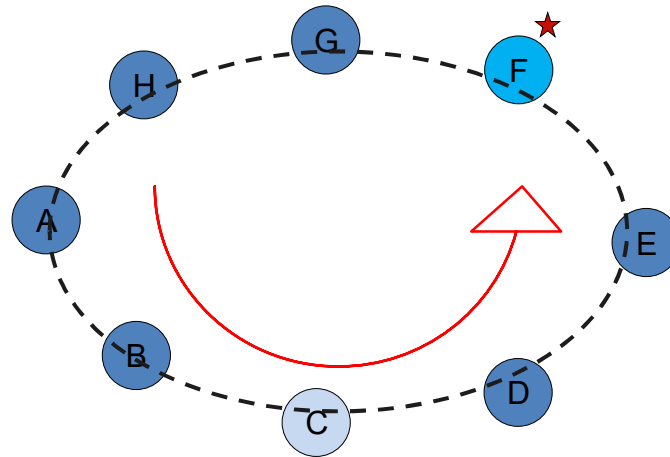

8 May 2025

5


DME for Ring Topology

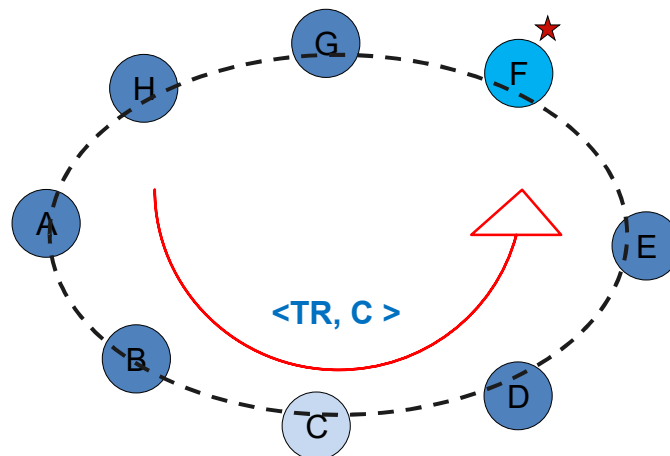

8 May 2025

6


DME for Ring Topology

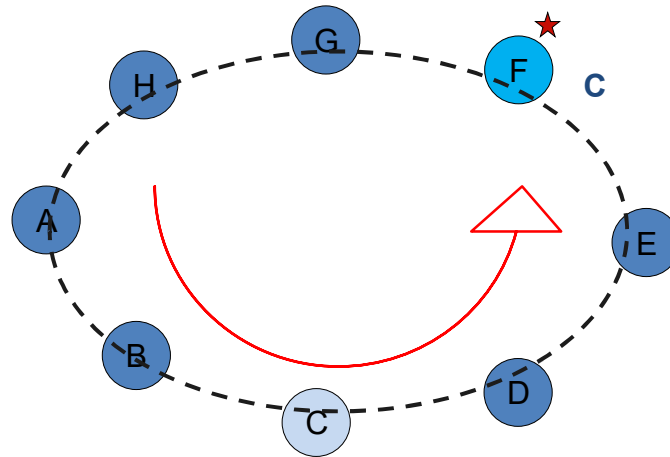

8 May 2025

7


DME for Ring Topology

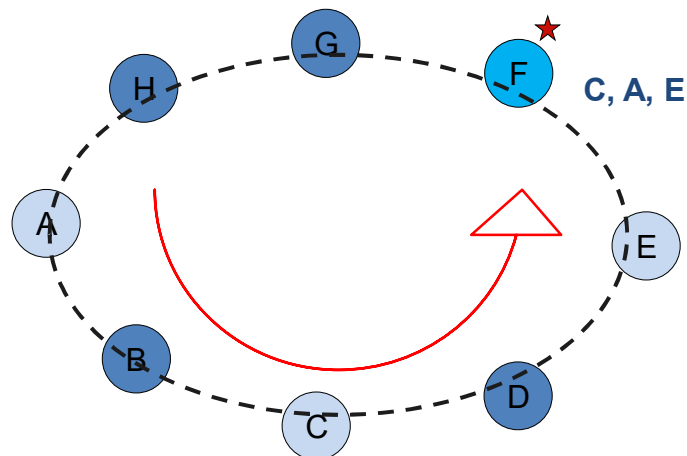

8 May 2025

8


DME for Ring Topology

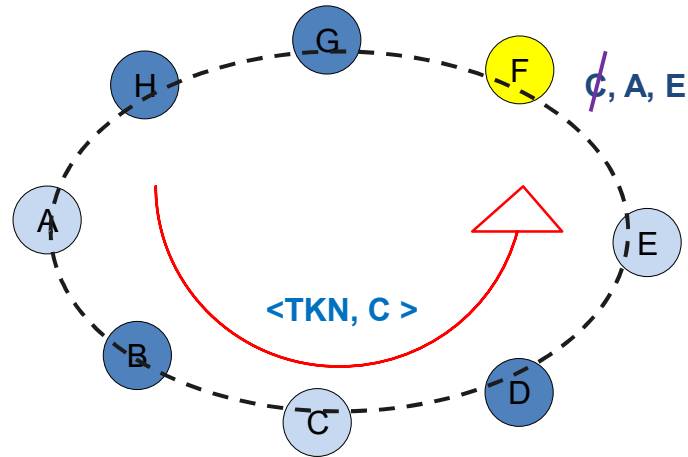

8 May 2025

9


DME for Ring Topology

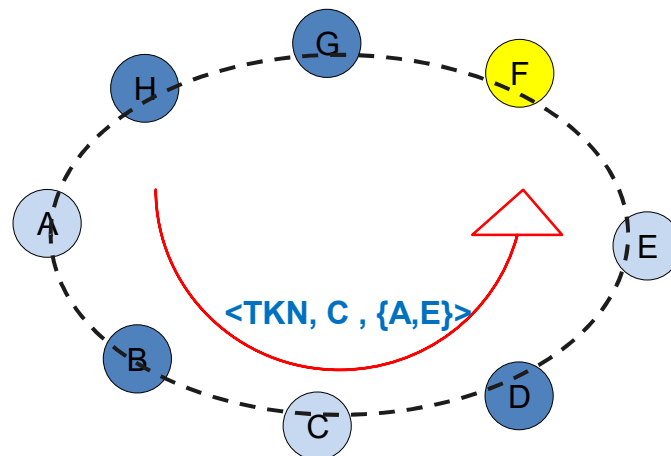

8 May 2025

10


DME for Ring Topology

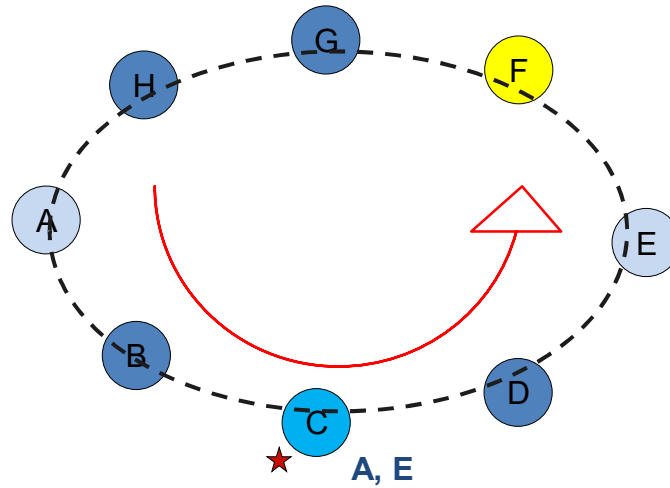

8 May 2025

11

DME for Ring Topology

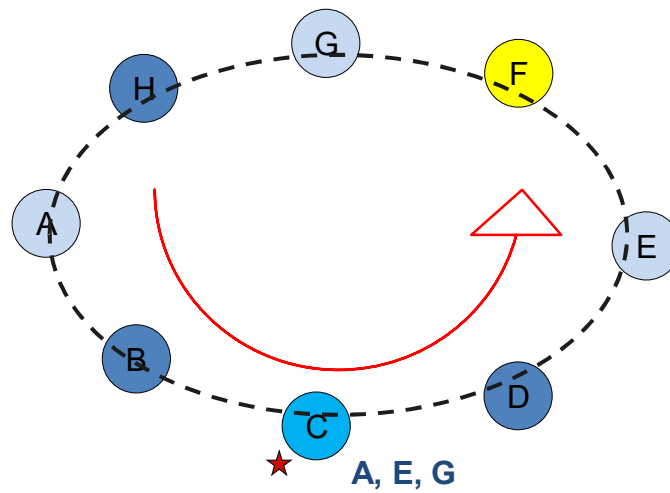

8 May 2025

12

Hints



- To start with, consider a network with N nodes and say, M requests.
- Each node in the ring must store address of its 1-hop neighbor
- Each candidate node, say C , sends a token request $\langle TR, C \rangle$ to its 1-hop neighbor in the ring

8 May 2025

13

Hints



- Nodes other than P_{hold} forward TRs
- P_{hold} enters the ID of the requesting node C in a local queue Q , for every $\langle TR, C \rangle$ received
- When P_{hold} comes out of CS, it deletes the next element, say E , from Q and passes the Token $\langle TKN, E, Q \rangle$ to E along with the rest of the Q

8 May 2025

14

Hints



- Nodes other than E forward TKN
- Node becomes the new P_{hold} when the control message $\langle TKN, E, Q \rangle$ reaches it - SUCCESS
- Run till all M requests get SUCCESS
- Print status of queue every time after another node gets the token

8 May 2025

15



Thanks for your attention

All the best...

16