

# Coalition Formation Algorithm of Prosumers in a Smart Grid Environment

**Nicolas Gensollen**, Vincent Gauthier, Monique Becker, Micher Marot

CNRS SAMOVAR, Telecom SudParis  
Institut MinesTelecom

`nicolas.gensollen@telecom-sudparis.eu`


16 december 2014,

disponible sur ArXiv à : <http://arxiv.org/abs/1410.8776>

- 1 Objective
- 2 Challenges
- 3 Data Issues
- 4 Our Method
- 5 Some Results
- 6 Conclusion and Perspectives


# Objective

- Data/Communication oriented
- **Prosumer** scenario (agents consume, produce, and sell to the grid)
- **Minimizing** the amount of **communication** needed to maintain stability
- Avoid communication **bottlenecks**
- Organizing prosumers into virtual **coalitions** (geographical distances are abstracted)
- Reduce the "*grid to agents*" type of communication flows
- How should these coalitions be formed ?

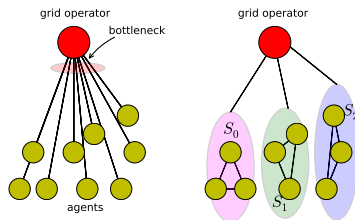


# Challenges

- Suppose coalitions are formed **on day  $d$  for day  $d + 1$**
- A **contract value** is decided for each coalition
- Over day  $d + 1$ , coalition net productions are likely to oscillates because :
  - ▶ agents **consume freely**
  - ▶ production is based on **renewables** (lots of **uncertainties**)
- BUT, for the grid operator, coalition **productions should remain stable** at their contract values
- Coalitions need **communication** to take actions (battery charge/discharge, load scheduling, backup generators)

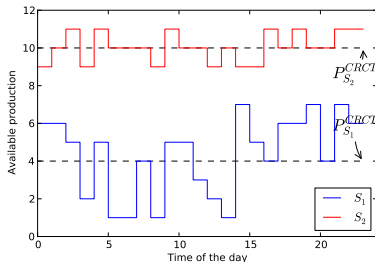


We want to minimize the amount of communication needed by forming coalition that, statistically speaking, will be likely to deviate less on day  $d + 1$

- Agents net production timeseries exhibit **diverse patterns** because of (mainly) :
  - Weather conditions at the agent location
  - The DER owned by the agents
  - The agents consumption habits
- Probability distributions** inferred from past values
- $\sigma_{ij} = \sqrt{\sigma_i^2 + \sigma_j^2 + \rho_{ij}\sigma_i\sigma_j}$
- We use the **Pearson correlation coefficient** to simplify the model
- We want to **cluster together uncorrelated agents**
- Unusual** and **complex** objective






$$\mathcal{F}(P_j) = \mathcal{N}(\mu_j, \sigma_j)$$

$$\mathcal{F}(P_i) = \mathcal{N}(\mu_i, \sigma_i)$$




# Uncorrelated / Diversity Idea

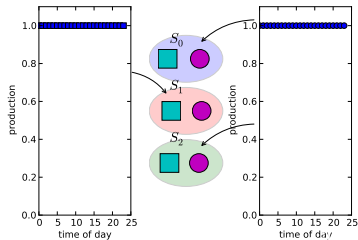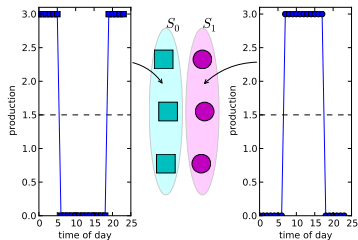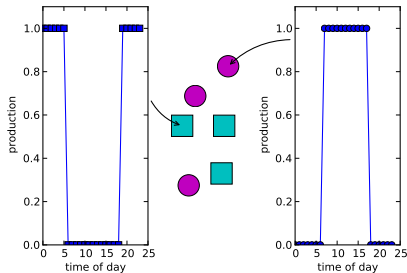



In the model, each agent is represented by the **timeserie** of its **net instantaneous production** (production - consumption)

## Data

- Consumption and production data with **fine granularity**
  - Geo-localized data
  - "High" sampling frequency (second to hour range)
- 
- "Real prosumers" do not really exist yet (necessity to model them)
  - We use **weather data** available for stations accross a given territory
  - These traces are used to generate net production traces for prosumer agents (see more details on next slide)

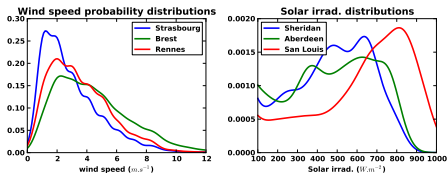


# Aggregated net prosumer production model

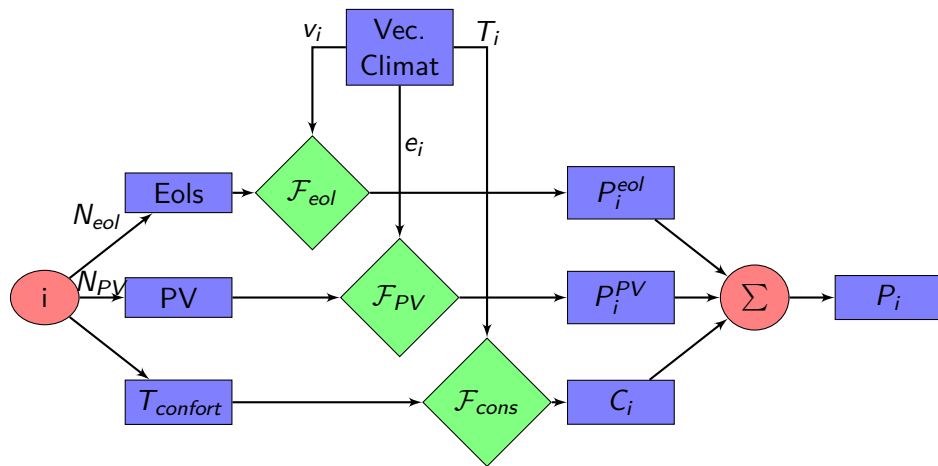





# Our Method (Overall view)

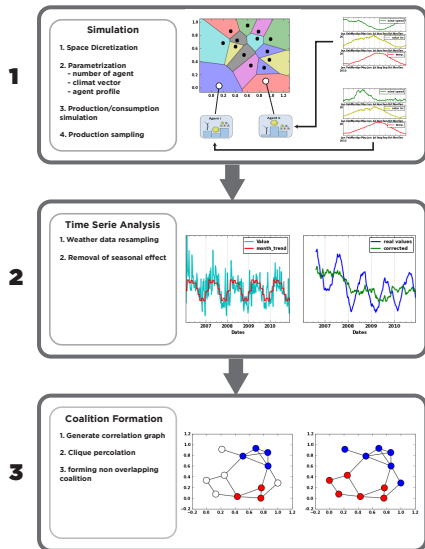





- Some examples considered :
- France (Lille, Brest, Dijon, Strasbourg, Bordeaux, Marseille...)
- USA ( Colorado, Kansas, Montana, Texas, Oklahoma...)
- 200 agents
- 16 zones (16 climate vectors)
- Timeseries from 01/01/2006 to 31/12/2010

# Some Results (part 1)

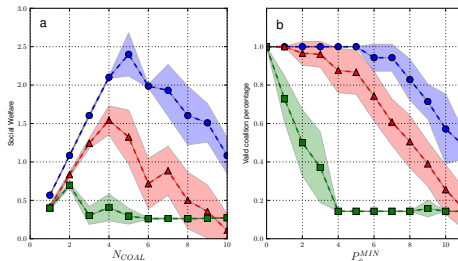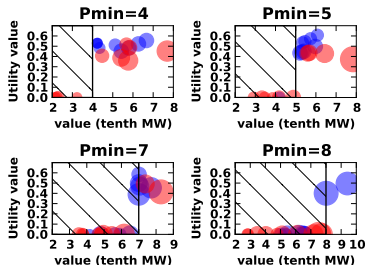

- Coalitions are able to sell (positive utility) if
  - ▶ They produce more than  $P_{min}$
  - ▶ With a low probability of producing less than the contract

# Some Results (part 2)

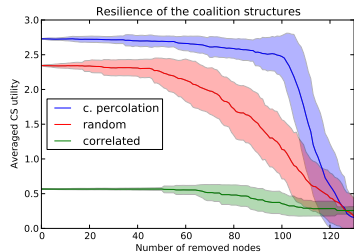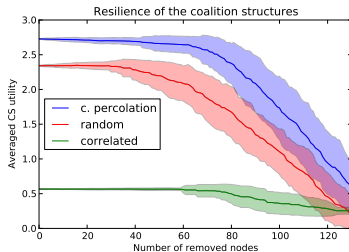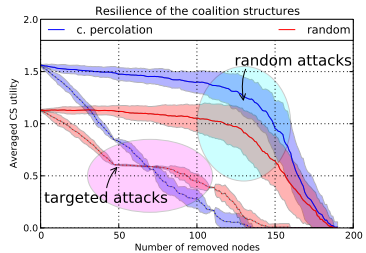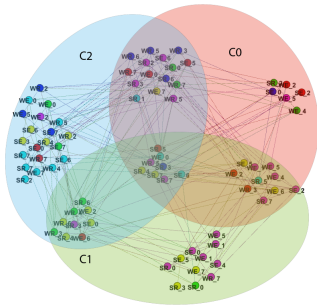

# Conclusion and Perspectives

- Communication oriented
- Modeling, simulations
- Use of statistical tools, complex systems, graph theory
- Lack of available "clean" data led us to construct our own "*traces generator*"
- Strong assumptions on the electrical part
- Studying the impact of electric constraints on the model could lead to an interesting and more realistic work