

SO cross-cl pipeline: decision tree — Bayesian search + profile scheme

left: search for moments with the evidence (r marginalised) · right: profile scheme, every model at its own r

A · Bayesian search for moments (evidence, r free)

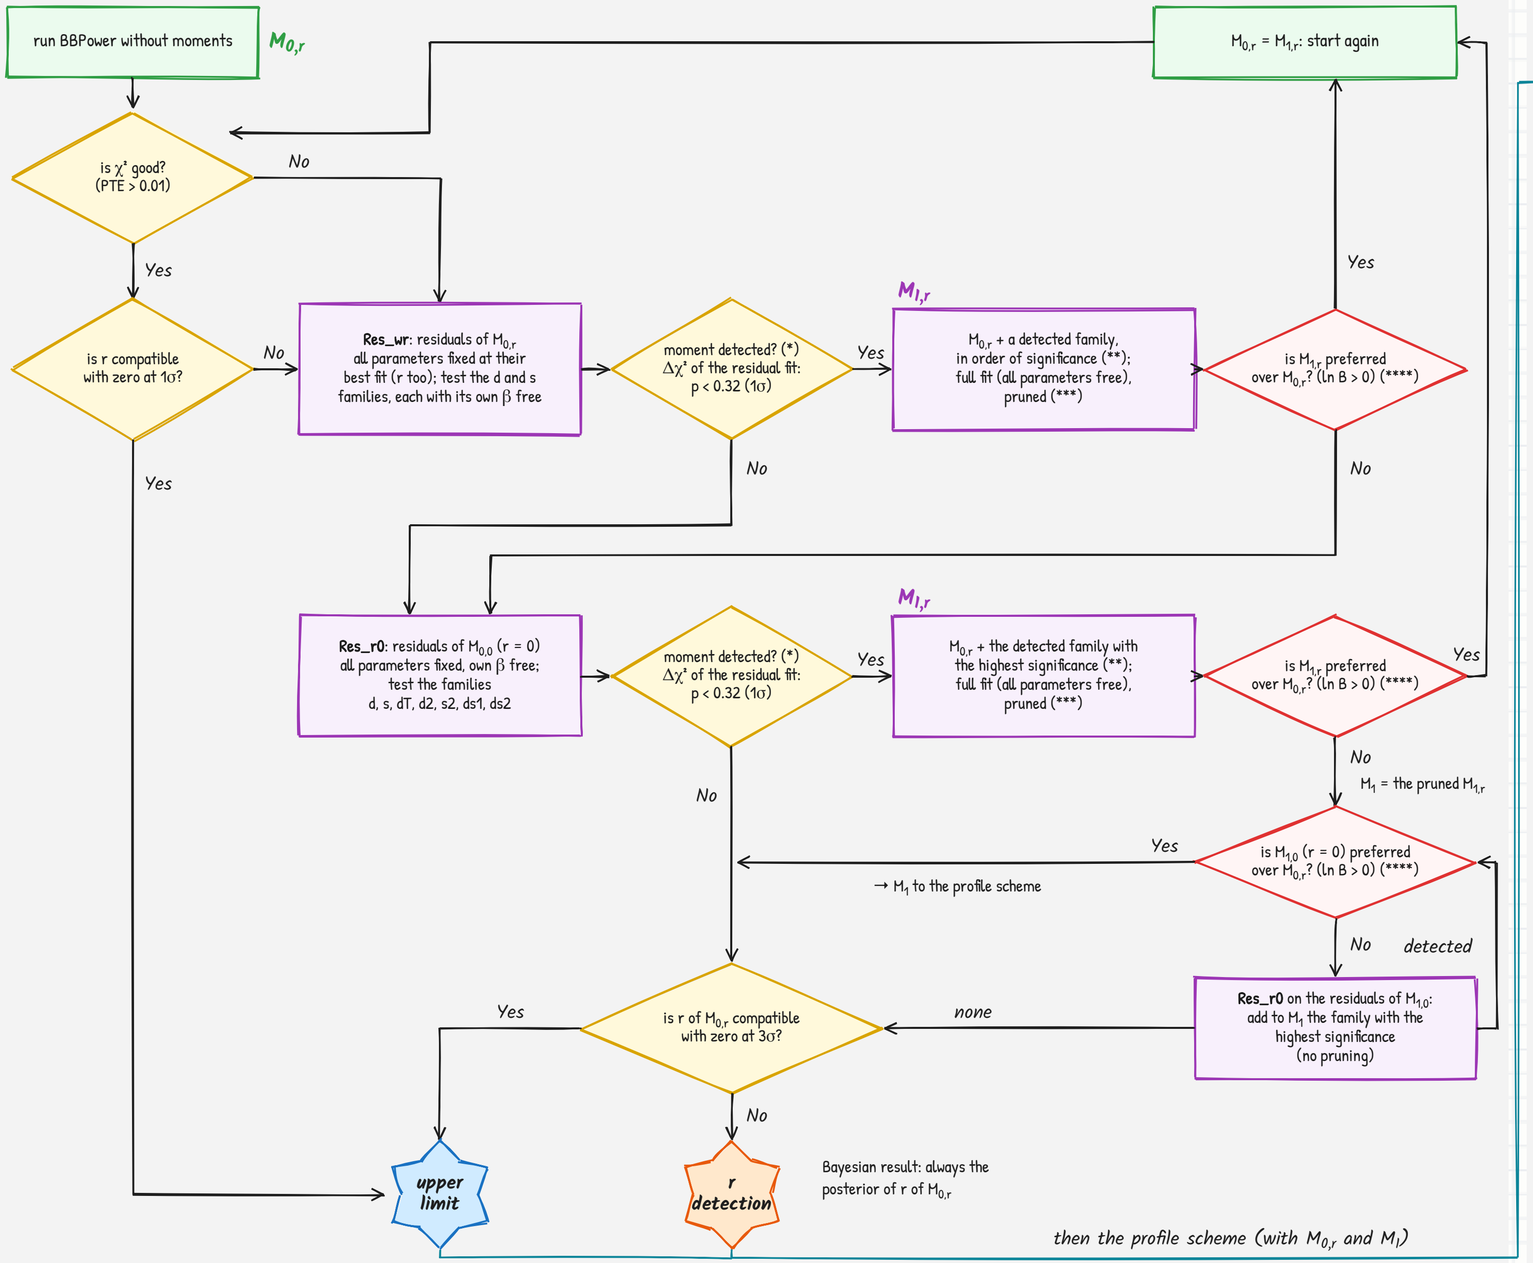

B · Profile scheme: every model at its own r

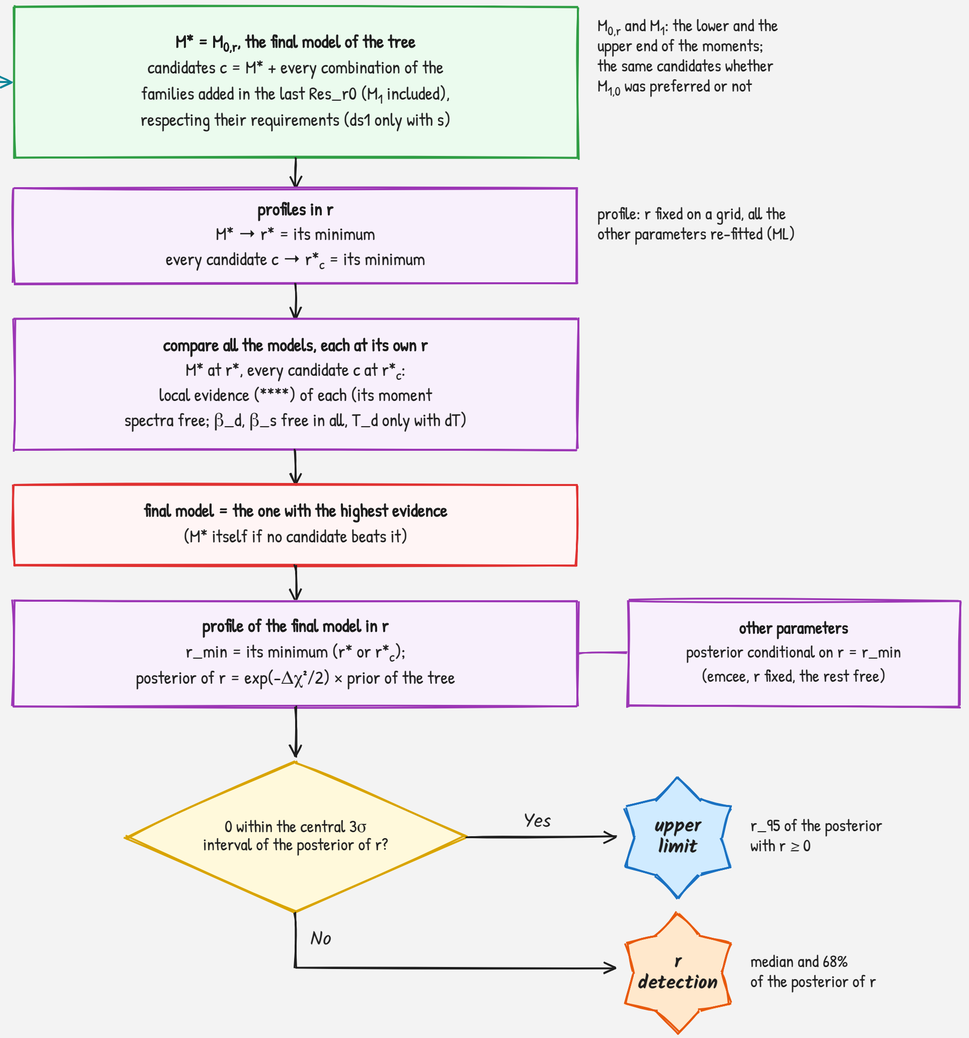

(*) ML fit of the family on the residuals (everything else fixed): $\Delta\chi^2$ vs the base fit, χ^2 with k = amplitudes of the family degrees of freedom; detected if p < 0.32 (1σ, the analogue of 0 outside the 68% HPD); the family enters whole

(**) significance: p of the residual test of each detected family; it sets the order in which the families are tried (Res_wr) or picks the one added (Res_r0)

(***) amplitudes with 0 in their 68% HPD (posterior of the full fit) removed and the model refitted, until all are detected; the pruned model is kept if ln B(pruned vs full) > 0 and is the one compared with $M_{0,r}$

(****) ln B within 2σ of the threshold (A) or between the two best models (B): PolyChord repeated with other seeds, mean of ln Z, up to 3 runs per fit