
Profile scheme (Res_wr*) — as run at NERSC (PySM_rnd3)

M = current model · C = candidate moment(s) · g = a moment group · ⑨ = result from the profile of the current M

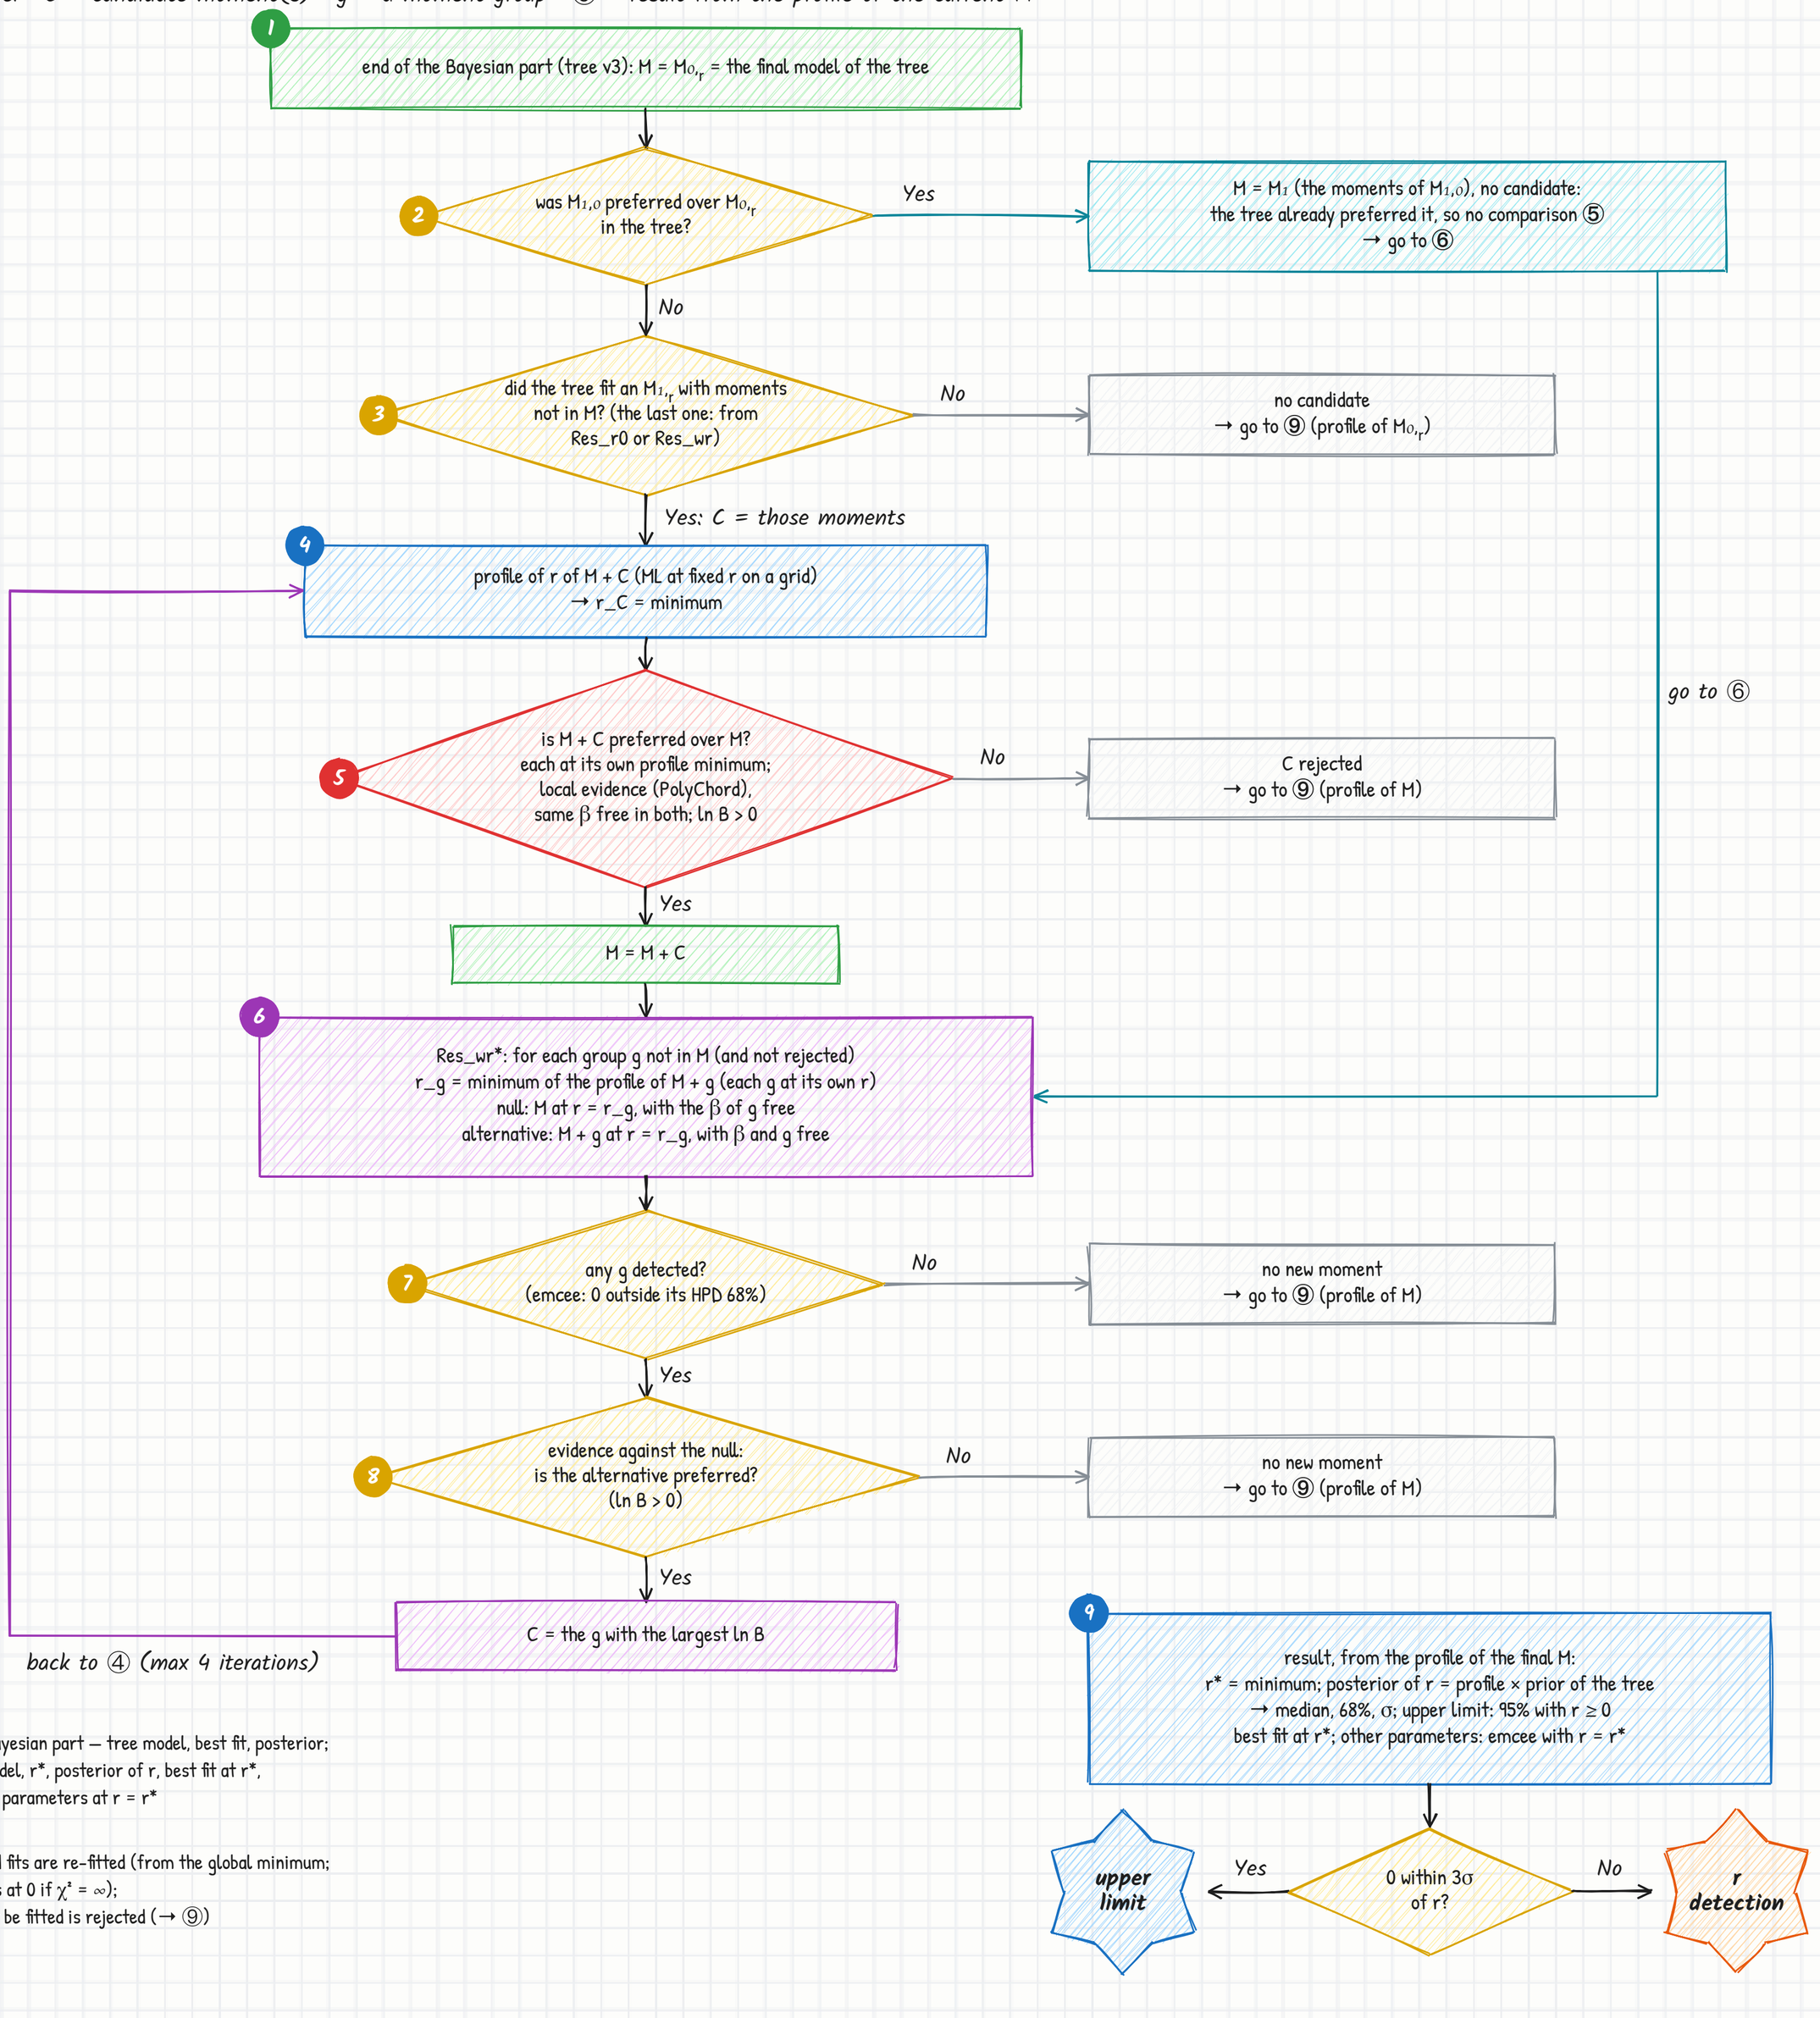

output (result.json): Bayesian part — tree model, best fit, posterior; profiled part — final model, r*, posterior of r, best fit at r*, posteriors of the other parameters at r = r*

profiles: non-converged fits are re-fitted (from the global minimum; with the new amplitudes at 0 if $\chi^2 = \infty$); a candidate that cannot be fitted is rejected (→ ⑨)