

Experiment 08

Aim: To code and register a service worker, and complete the install and activation process for a new service worker for the E-commerce PWA.

Theory:

Service Worker

Service Worker is a script that works on browser background without user interaction independently. Also, It resembles a proxy that works on the user side. With this script, you can track network traffic of the page, manage push notifications and develop “offline first” web applications with Cache API.

Things to note about Service Worker:

- A service worker is a programmable network proxy that lets you control how network requests from your page are handled.
- Service workers only run over HTTPS. Because service workers can intercept network requests and modify responses, "man-in-the-middle" attacks could be very bad.
- The service worker becomes idle when not in use and restarts when it's next needed. You cannot rely on a global state persisting between events. If there is information that you need to persist and reuse across restarts, you can use IndexedDB databases.

What can we do with Service Workers?

- You can dominate **Network Traffic**
You can manage all network traffic of the page and do any manipulations. For example, when the page requests a CSS file, you can send plain text as a response or when the page requests an HTML file, you can send a png file as a response. You can also send a true response too.
- You can **Cache**
You can cache any request/response pair with Service Worker and Cache API and you can access these offline content anytime.
- You can manage **Push Notifications**
You can manage push notifications with Service Worker and show any information

message to the user.

- You can **Continue**

Although Internet connection is broken, you can start any process with Background Sync of Service Worker.

What can't we do with Service Workers?


- You can't access the **Window**

You can't access the window, therefore, You can't manipulate DOM elements. But, you can communicate to the window through post Message and manage processes that you want.

- You can't work it on **80 Port**

Service Worker just can work on HTTPS protocol. But you can work on localhost during development.

Service Worker Cycle

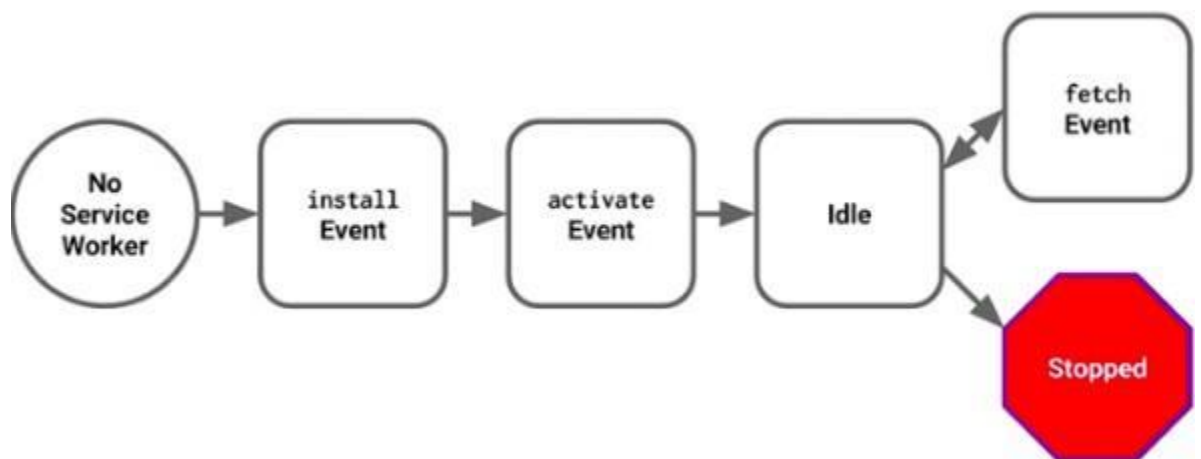

A service worker goes through three steps in its life cycle:

- Registration
- Installation
- Activation

Registration

To install a service worker, you need to register it in your main JavaScript code. Registration tells the browser where your service worker is located, and to start installing it in the background. Let's look at an example:

main.js

```

if ('serviceWorker' in navigator) {
  navigator.serviceWorker.register('/service-worker.js')
  .then(function(registration) {
    console.log('Registration successful, scope is:', registration.scope);
  })
  .catch(function(error) {
    console.log('Service worker registration failed, error:', error);
  });
}

```

This code starts by checking for browser support by examining **navigator.serviceWorker**. The service worker is then registered with `navigator.serviceWorker.register`, which returns a promise that resolves when the service worker has been successfully registered. The scope of the service worker is then logged with `registration.scope`. If the service worker is already installed, `navigator.serviceWorker.register` returns the registration object of the currently active service worker.

The scope of the service worker determines which files the service worker controls, in other words, from which path the service worker will intercept requests. The default scope is the location of the service worker file, and extends to all directories below. So if `service-worker.js` is located in the root directory, the service worker will control requests from all files at this domain.

You can also set an arbitrary scope by passing in an additional parameter when registering. For example:

main.js

```

navigator.serviceWorker.register('/service-worker.js', {
  scope: '/app/'
});

```

In this case we are setting the scope of the service worker to `/app/`, which means the service worker will control requests from pages like `/app/`, `/app/lower/` and `/app/lower/lower`, but not from pages like `/app` or `/`, which are higher.

If you want the service worker to control higher pages e.g. `/app` (without the trailing slash) you can indeed change the scope option, but you'll also need to set the `Service-Worker-Allowed` HTTP Header in your server config for the request serving the service worker script.

main.js

```
navigator.serviceWorker.register('/app/service-worker.js', {  
  scope: '/app'  
});
```

Installation

Once the browser registers a service worker, installation can be attempted. This occurs if the service worker is considered to be new by the browser, either because the site currently doesn't have a registered service worker, or because there is a byte difference between the new service worker and the previously installed one.

A service worker installation triggers an install event in the installing service worker. We can include an install event listener in the service worker to perform some task when the service worker installs. For instance, during the install, service workers can precache parts of a web app so that it loads instantly the next time a user opens it (see caching the application shell). So, after that first load, you're going to benefit from instant repeat loads and your time to interactivity is going to be even better in those cases. An example of an installation event listener looks like this:

service-worker.js

```
// Listen for install event, set callback  
self.addEventListener('install', function(event) {  
  // Perform some task  
});
```

Activation

Once a service worker has successfully installed, it transitions into the activation stage. If there are any open pages controlled by the previous service worker, the new service worker enters a waiting state. The new service worker only activates when there are no longer any pages loaded that are still using the old service worker. This ensures that only one version of the service worker is running at any given time.

When the new service worker activates, an activate event is triggered in the activating service worker. This event listener is a good place to clean up outdated caches (see the Offline Cookbook for an example).

service-worker.js

```
self.addEventListener('activate', function(event) {  
  // Perform some task  
});
```

Once activated, the service worker controls all pages that load within its scope, and starts listening for events from those pages. However, pages in your app that were loaded before the service worker activation will not be under service worker control. The new service worker will only take over when you close and reopen your app, or if the service worker calls **clients.claim()**. Until then, requests from this page will not be intercepted by the new service worker. This is intentional as a way to ensure consistency in your site.

CODE:

index.html

```
<!DOCTYPE html>

<html>
<head>
  <title>Netflix - Watch TV Shows Online, Watch Movies Online</title>
  <meta charset="utf-8">
  <meta name="viewport" content="width=device-width, initial-scale=1">

  <!--for making the website more responsive-->
  <meta http-equiv="X-UA-compatible" content="ie=">
  <!--for Favicon-->
  <link rel="shortcut icon" type="image/png" href="https://img.techpowerup.org/200517/prodipto.png">
  <!--for CSS-->
  <link rel="stylesheet" type="text/css" href="netflixstyles.css">
  <!--link rel="stylesheet" href="https://www.w3schools.com/lib/w3.css"/ -->

  <link rel="manifest" href="/manifest.json">

  <meta name="theme-color" content="#4285f4">
</head>

<body>
  <header class="showcase">
    <div class="showcase-top">
      <p>Best of the Week</p>
    </div>

    <nav>
      <a href="#" class="btn btn-m"> Sign in <i class="fas fa-chevron-right btn-icon"></i>
    </a>
    </nav>
    <!--inside the following div we could write : style="background-image:
url('https://img.techpowerup.org/200613/netflix-backgroung-image.jpg');"-->
    <div class="showcase-content" >
      <br><br><br><br><br><br><br><br><br><br><br><br><br><br>
      <h1>Unlimited movies, TV<br>shows and more...</h1>
      <br><br>
```

```
        <div class="search-box">
            <input class="search-txt" type="text" name="box" placeholder="Email address."><a
href="#" class="btn btn-x1">TRY IT NOW<i class="fas fa-chevron-right btn-icon"></i>
            </a>
        </div>
    </div>
```

```
    <div>
        <h3>Ready to watch? Enter your Email to create or restart your membership. </h3>
        <br><br>
    </div>
</header>
```

```
<div class="enjoy-tv">
    <div>
        <h2> Enjoy on your TV. </h2>
        <p>Watch on your smart-TV, PlayStation,<br>XBox, ChromeCast, AppleTV, blu-<br>ray
players and more.</p>
    </div>
    
</div>
```

```
<div class="Watch-offline">
    <div>
        <h2>Download your shows<br>to watch offline.</h2>
        <p>Save your favourites easily and<br>always have something to watch.</p>
    </div>
    
</div>
```

```
<div class="watch-everywhere">
    <h2>Watch Everywhere.</h2>
    <p>Stream unlimited movies and TV<br>shows on your phon, tablet, laptop,<br>and TV.</p>
</div>
```

```
<div class="ask-question">
    <h1>Frequently Asked Questions...</h1>
    <button>What is Netfiix?</button><br><br>
    <button>How much does Netflix costs?</button><br><br>
    <button>Where can I watch?</button><br><br>
    <button>How do I cancel?</button><br><br>
    <button>What can I watch on netflix?</button>
</div>
```

```

<div>
    <input class="search-txt" type="text" name="box" placeholder="Email address"><a href="#"
class="btn btn-x1">TRY IT NOW<i class="fas fa-chevron-right btn-icon"></i></a>
</div>
<br>

<div>
    <h3>Ready to watch? Enter your email to create or restart your membership.</h3><br><br>
</div>

<footer class="page-down">
    <p style="font-weight: 600;"><a href="#">Questions? Call 000-800-040-1842</a></p>
    <p style="font-weight: 600;"><a href="#">FAQ</a></p>
    <p style="font-weight: 600;"><a href="#">Investor Relations.</a></p>
    <p style="font-weight: 600;"><a href="#">Privacy.</a></p>
    <p style="font-weight: 600;"><a href="#">Speed Test.</a></p>
    <p><a href="#">Netflix India</a></p>
    <p><a href="#">Help Center.</a></p>
    <p><a href="#">Jobs.</a></p>
    <p><a href="#">Cookie Preference.</a></p>
    <p><a href="#">Legal Notices.</a></p>
    <p><a href="#">Account.</a></p>
    <p><a href="#">Way to Watch.</a></p>
    <p><a href="#">Corporate Information.</a></p>
    <p><a href="#">Netflix Originals.</a></p>
    <p><a href="#">Media Centre.</a></p>
    <p><a href="#">Terms of Use.</a></p>
    <p><a href="#">Contact us</a></p>

</footer>

<script src="/app.js"></script>

</body>
</html>

```

serviceworker.js

```

var cacheName = "pwa-1";
const assetsToCache = [
    "/",
    "/index.html",
    "/netflixstyles.css",
    "/icon-192x192.jpg", // Add more product images as needed
    "/icon-512x512.jpg",
    "manifest.json", // Ensure manifest is cached
    "serviceworker.js", // Ensure serviceworker is cached

```

```

    "app.js"
    ];

self.addEventListener('install', event => {
    event.waitUntil(
        caches.open(cacheName)
            .then(cache => {
                return cache.addAll(assetsToCache);
            })
    );
});

```

```

self.addEventListener('activate', event => {
    event.waitUntil(
        caches.keys().then(cacheNames => {
            return Promise.all(
                cacheNames.filter(name => {
                    return name !== cacheName;
                }).map(name => {
                    return caches.delete(name);
                })
            );
        })
    );
});

```

app.js

```

if ('serviceWorker' in navigator) {
    window.addEventListener('load', () => {
        navigator.serviceWorker.register('/serviceworker.js')
            .then(registration => {
                console.log('Service Worker registered with scope:', registration.scope);
            })
            .catch(error => {
                console.error('Service Worker registration failed:', error);
            });
    });
}

```

OUTPUT:

← → ↻ 127.0.0.1:5500

Best of the Week

Unlimited movies, TV shows

Application

Manifest

Service workers

Storage

Local storage

Session storage

IndexedDB

Web SQL

Cookies

Private state tokens

Interest groups

Shared storage

Cache storage

Background services

Back/forward cache

Background fetch

Background sync

Bounce tracking mitigations

Notifications

Payment handler

Periodic background sync

Service workers

Offline

Update on reload

Bypass for network

http://127.0.0.1:5500/

Source serviceworker.js

Received 3/27/2024, 8:15:47 PM

Status #400 activated and is running stop

Push Test push message from DevTools. Push

Sync test-tag-from-devtools Sync

Periodic Sync test-tag-from-devtools Periodic Sync

Update Cycle

Version	Update Activity	Timeline
#400	Install	
#400	Wait	
#400	Activate	

Service workers from other origins

See all registrations

Console

top Filter

Service Worker registered with scope: http://127.0.0.1:5500/

app-1s+5

Service workers

☐ Offline ☒ Update on reload ☐ Bypass for network

http://127.0.0.1:5500/

Source [serviceworker.js](#)

Received 3/27/2024, 8:15:47 PM

Status ● #400 activated and is running [stop](#)

Push [Push](#)

Sync [Sync](#)

Periodic Sync [Periodic Sync](#)

Update Cycle

Version	Update Activity	Timeline
▶ #400	Install	<div></div>
▶ #400	Wait	<div></div>
▶ #400	Activate	<div></div>