Universal Simulator

Documentation

Version 3.0.34

1 Contents

Modules and classes

1 Contents 2
2 Module: boxes 8
2.1 Class: Accumulator 8
2.1.1 Inputs 8
2.1.2 Outputs 8
2.1.3 Usage 8
2.2 Class: AhFromRh 9
2.2.1 Inputs 9
2.3 Class: AllTypes 9
2.3.1 Inputs 9
2.4 Class: Briere 10
2.4.1 Inputs 10
2.4.2 Outputs 10
2.4.3 Background 10
2.4.4 Parameter estimation 10
2.5 Class: Buffer 10
2.5.1 Inputs 10
2.5.2 Outputs 11
2.6 Class: Calendar 11
2.6.1 Inputs 11
2.6.2 Outputs 11
2.7 Class: Combinations 12
2.7.1 Outputs 12
2.8 Class: Computation 12
2.8.1 Outputs 12
2.9 Class: Date 12
2.9.1 Inputs 12
2.9.2 Outputs 12
2.10 Class: DateSplit 12
2.10.1 Inputs 12
2.10.2 Outputs 12
2.11 Class: DateTime 12
2.11.1 Inputs 12
2.11.2 Outputs 13
2.12 Class: DateTimeSignal 13
2.12.1 Inputs 13
2.12.2 Outputs 13
2.12.3 Usage 13
2.13 Class: DayDegrees 14
2.13.1 Inputs 14
2.13.2 Outputs 14
2.14 Class: DemandBudget 14
2.14.1 Inputs 14
2.14.2 Outputs 14
2.15 Class: DewPoint 14
2.15.1 Inputs 14
2.15.2 Outputs 14
2.16 Class: Distribution 15
2.16.1 Inputs 15
2.17 Class: FixedSignal 15

2.17.1 Inputs 15
2.17.2 Outputs 15
2.18 Class: FoodWeb 15
2.18.1 Inputs 15
2.19 Class: FoodWebCalcParasiteHost 15
2.19.1 Inputs 15
2.20 Class: FoodWebCalcPredatorPrey 15
2.20.1 Inputs 15
2.21 Class: FunctionalResponse 16
2.21.1 Inputs 16
2.21.2 Outputs 16
2.22 Class: Host 16
2.22.1 Inputs 16
2.22.2 Outputs 16
2.23 Class: Hump 16
2.23.1 Inputs 16
2.23.2 Outputs 17
2.24 Class: IgnoredBox 17
2.25 Class: LobryRossoFlandrois 17
2.25.1 Inputs 17
2.25.2 Outputs 17
2.26 Class: Maker 17
2.26.1 Inputs 17
2.27 Class: Maximum 17
2.27.1 Inputs 17
2.27.2 Outputs 18
2.28 Class: MaximumAt 18
2.28.1 Inputs 18
2.28.2 Outputs 18
2.29 Class: Mean 18
2.29.1 Inputs 18
2.29.2 Outputs 18
2.30 Class: Message 18
2.30.1 Inputs 18
2.31 Class: Minimum 18
2.31.1 Inputs 18
2.31.2 Outputs 18
2.32 Class: Multiplum 19
2.32.1 Inputs 19
2.32.2 Outputs 19
2.33 Class: NumberedFile 19
2.33.1 Inputs 19
2.33.2 Outputs 19
2.34 Class: OffsetDateTime 19
2.34.1 Inputs 19
2.34.2 Outputs 19
2.35 Class: OnOff 19
2.35.1 Inputs 19
2.35.2 Outputs 20
2.36 Class: OnOffByDate 20
2.36.1 Inputs 20
2.36.2 Outputs 20
2.37 Class: OutputR 20
2.37.1 Inputs 20

2.37.2 Outputs 21
2.38 Class: OutputSelector 21
2.38.1 Inputs 21
2.38.2 Outputs 21
2.39 Class: OutputText 22
2.39.1 Inputs 22
2.40 Class: OutputWriter 22
2.40.1 Inputs 22
2.40.2 Outputs 22
2.41 Class: PageR 22
2.41.1 Inputs 22
2.42 Class: Parasite 23
2.42.1 Inputs 23
2.42.2 Outputs 23
2.43 Class: PlotR 23
2.43.1 Inputs 23
2.44 Class: PopUp 24
2.44.1 Inputs 24
2.44.2 Outputs 24
2.45 Class: Population 24
2.45.1 Inputs 24
2.45.2 Outputs 25
2.46 Class: Predator 25
2.46.1 Inputs 25
2.46.2 Outputs 25
2.47 Class: Prey 25
2.47.1 Inputs 25
2.47.2 Outputs 25
2.48 Class: PrioritySignal 25
2.48.1 Inputs 25
2.48.2 Outputs 26
2.49 Class: ProportionalSignal 26
2.49.1 Inputs 26
2.49.2 Outputs 26
2.50 Class: RandomBinomial 26
2.50.1 Inputs 26
2.50.2 Outputs 27
2.51 Class: RandomLogNormal 27
2.51.1 Inputs 27
2.51.2 Outputs 27
2.52 Class: RandomLogUniform 27
2.52.1 Inputs 27
2.52.2 Outputs 28
2.53 Class: RandomNormal 28
2.53.1 Inputs 28
2.53.2 Outputs 28
2.54 Class: RandomUniform 28
2.54.1 Inputs 28
2.54.2 Outputs 28
2.55 Class: RandomUniformInt 29
2.55.1 Inputs 29
2.55.2 Outputs 29
2.56 Class: RandomiserMonteCarlo 29
2.56.1 Inputs 29

2.56.2 Outputs 29
2.57 Class: RandomiserSobolSequence 30
2.57.1 Inputs 30
2.57.2 Outputs 30
2.58 Class: RandomiserStratified 30
2.58.1 Inputs 30
2.58.2 Outputs 30
2.59 Class: Ratio 31
2.59.1 Inputs 31
2.59.2 Outputs 31
2.60 Class: Records 31
2.60.1 Inputs 31
2.60.2 Outputs 31
2.61 Class: RunningAverageSteps 32
2.61.1 Inputs 32
2.61.2 Outputs 32
2.62 Class: RunningAverageTimed 32
2.62.1 Inputs 32
2.62.2 Outputs 32
2.63 Class: RunningSumSteps 32
2.63.1 Inputs 32
2.63.2 Outputs 32
2.64 Class: RunningSumTimed 33
2.64.1 Inputs 33
2.64.2 Outputs 33
2.65 Class: Sah 33
2.65.1 Inputs 33
2.66 Class: Sandy 33
2.66.1 Inputs 33
2.66.2 Outputs 33
2.67 Class: Scenarios 33
2.67.1 Inputs 33
2.67.2 Outputs 34
2.68 Class: SelectFile 34
2.68.1 Inputs 34
2.68.2 Outputs 34
2.69 Class: SequenceByIteration 34
2.69.1 Inputs 34
2.69.2 Outputs 34
2.70 Class: SequenceByStep 35
2.70.1 Inputs 35
2.70.2 Outputs 35
2.71 Class: SeriesByIteration 35
2.71.1 Inputs 35
2.71.2 Outputs 35
2.72 Class: SeriesByStep 35
2.72.1 Inputs 35
2.72.2 Outputs 35
2.73 Class: Simulation 36
2.73.1 Inputs 36
2.73.2 Outputs 36
2.74 Class: SineWaveTemperature 36
2.74.1 Inputs 36
2.74.2 Outputs 37

2.75 Class: SobolGFunction 37
2.75.1 Inputs 37
2.75.2 Outputs 37
2.76 Class: Split 37
2.76.1 Inputs 37
2.76.2 Outputs 37
2.77 Class: Stage 38
2.77.1 Inputs 38
2.77.2 Outputs 38
2.78 Class: StageAndPhase 38
2.78.1 Inputs 38
2.78.2 Outputs 39
2.79 Class: Sum 39
2.79.1 Inputs 39
2.79.2 Outputs 39
2.80 Class: Sun 40
2.80.1 Inputs 40
2.80.2 Outputs 40
2.81 Class: SunDiffuseRadiation 40
2.81.1 Inputs 40
2.81.2 Outputs 40
2.82 Class: SuperFunctionalResponse 41
2.82.1 Inputs 41
2.82.2 Outputs 41
2.83 Class: SupplyBudget 41
2.83.1 Inputs 41
2.83.2 Outputs 41
2.84 Class: ThresholdSignal 41
2.84.1 Inputs 41
2.84.2 Outputs 42
2.85 Class: TimeToHours 42
2.85.1 Inputs 42
2.85.2 Outputs 42
2.86 Class: VectorScaled 42
2.86.1 Inputs 42
2.86.2 Outputs 42
2.87 Class: VectorSum 42
2.87.1 Inputs 42
2.87.2 Outputs 42
2.88 Class: boxesDocumentation 43
2.88.1 Inputs 43
3 Module: callosobruchus 43
3.1 Class: DensityDependent 43
3.1.1 Inputs 43
3.1.2 Outputs 43
3.2 Class: Fecundity 43
3.2.1 Inputs 43
3.2.2 Outputs 43
3.3 Class: Stock 44
3.3.1 Inputs 44
3.3.2 Outputs 44
3.4 Class: callosobruchusDocumentation 44
3.4.1 Inputs 44
4 Module: cmbp 44

4.1 Class: DevRate 44
4.1.1 Inputs 44
4.1.2 Outputs 44
4.2 Class: Emigration 44
4.2.1 Inputs 44
4.2.2 Outputs 45
4.3 Class: ExponentialPeak 45
4.3.1 Inputs 45
4.3.2 Outputs 45
4.4 Class: Fecundity 45
4.4.1 Inputs 45
4.4.2 Outputs 45
4.5 Class: GrainMoistureContent 45
4.5.1 Inputs 45
4.5.2 Outputs 45
4.6 Class: GrainStore 46
4.6.1 Inputs 46
4.6.2 Outputs 46
4.7 Class: Immigration 46
4.7.1 Inputs 46
4.7.2 Outputs 46
4.8 Class: SurvivalByDensity 46
4.8.1 Inputs 46
4.8.2 Outputs 46
5 Module: command 46
5.1 Class: commandDocumentation 46
5.1.1 Inputs 46

2 Module: boxes

2.1 Class: Accumulator

2.1.1 Inputs

Parameter	Type	Default	Description
`initial`	`double`	`0.0`	Initial `value` at reset
`change`	`double`	`0.0`	Change added to `value`
`minValue`	`double`	$-\infty$	Minimum possible `value`
`maxValue`	`double`	∞	Maximum possible `value`

2.1.2 Outputs

Parameter	Type	Default	Description
`value`	`double`	`0.0`	Accumulated value
`signal`	`double`	`0.0`	Synonym for `value`
`isAtMin`	`bool`	`FALSE`	Is `value` equal to `minValue`?
`isAtMax`	`bool`	`FALSE`	Is `value` equal to `maxValue`?

2.1.3 Usage

The `Accumulator` box keeps track of an accumulated sum. For every simulation step, change (can be negative) is added to its `value`. This boxscript calculates the day-degrees above a threshold of 10 °C (a DayDegrees box would allow you more control with less BoxScript code):

```
// accumulator1.box
Simulation sim {
  Calendar calendar {
    .begin = 01/05/2009
    .end   = 30/09/2009
  }
  Records weather {
    .fileName = "weather/flakkebjerg 2009.txt"
  }
  Accumulator dd18 {
    .change = if (weather[Tavg] > 18) then weather[Tavg] - 18 else 0
  }
  OutputR {
    PageR {
      .xAxis = calendar[date]
      PlotR {
        .layout = "merged"
        .ports = weather[Tavg] | dd18[change] | dd18[value]
      }
    }
  }
}
```

Note that in the output, if a port is named "value" then it is by default labelled after its parent name (here "dd18"):

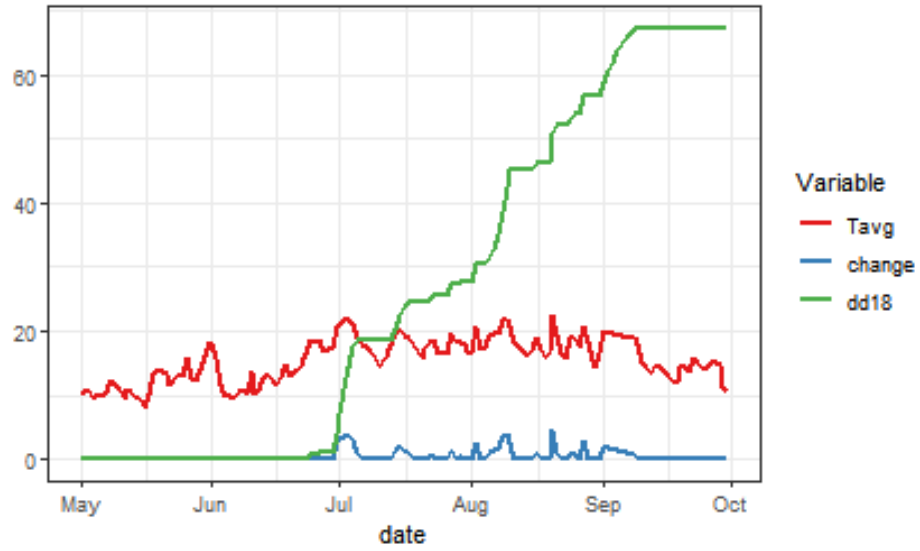


Figure 1: Accumulator example

2.2 Class: AhFromRh

2.2.1 Inputs

Parameter	Type	Default	Description
temperature	double	0.0	Temperature
rh	double	0.0	Relative humidity
value	double	0.0	Absolute humidity

2.3 Class: AllTypes

2.3.1 Inputs

Parameter	Type	Default	Description
bool	bool	FALSE	
int	int	0	
double	double	0.0	
string	string		
date	date	null	
time	time	null	
datetime	datetime	null	
baredate	baredate	null	
path	path	null	
vec_bool	vec_bool	null	
vec_int	vec_int	null	
vec_double	vec_double	null	
vec_string	vec_string	null	
vec_date	vec_date	null	
vec_time	vec_time	null	

vec_datetime	vec_datetime	null	
vec_baredate	vec_baredate	null	

2.4 Class: Briere

2.4.1 Inputs

Parameter	Type	Default	Description
T	double	a)	
timeStepDays	double	b)	
resetTotal	bool	FALSE	Reset total zero?
isTicking	bool	TRUE	Is the physiological time running? Else step will be zero
T0	double	0.0	Lower temperature threshold
Tmax	double	0.0	Upper temperature threshold
a	double	0.0	Scaling parameter

a) weather[Tavg]
b) calendar[timeStepDays]

2.4.2 Outputs

Parameter	Type	Default	Description
step	double	0.0	Increment in physiological time units (PTU)
total	double	0.0	Total time since reset

2.4.3 Background

The Briere box implements the non-linear model for physiological development of Briere et al. (1999) defined by three inputs: T0, Tmax and a. They designate the lower and upper threshold for development, respectively, and a scaling parameter with no direct biological meaning. The equation for development rate is

$$\frac{1}{L} = aT(T - T_0)\sqrt{T_{\max} - T}$$

The position of the temperature optimum is given implicitly by T_0 and $T_{\max}$ and can be derived from the above equation as

$$T_{\text{opt}} = \frac{\sqrt{9T_0^2 - 16T_0T_{\max} + 16T_{\max}^2} + 3T_0 + 4T_{\max}}{10}$$

Maybe of more relevance is the finding, that if you want to define the curve by its optimum rather than its maximum temperature, you can calculate the maximum temperature from the optimal temperature by

$$T_{\max} = \frac{T_{\text{opt}}(5T_{\text{opt}} - 3T_0)}{4T_{\text{opt}} - 2T_0}$$

2.4.4 Parameter estimation

2.5 Class: Buffer

2.5.1 Inputs

Parameter	Type	Default	Description

initial	double	0.0	Initial amount at first place in buffer
input	double	0.0	Input to next place in buffer
increment	double	0.0	Increment added to every place in buffer
size	int	100	Number of places in buffer

2.5.2 Outputs

Parameter	Type	Default	Description
sum	double	0.0	Total amount in buffer
average	double	0.0	Average amount of places used in buffer
buffer	vec_double	null	The buffer itself

2.6 Class: Calendar

2.6.1 Inputs

Parameter	Type	Default	Description
latitude	double	52.0	Latitude
longitude	double	11.0	Longitiude
timeZone	int	1	Time zone
begin	datetime	a)	When simulation begins
end	datetime	null	When simulation ends (optional)
timeStep	int	1	Time step in units of timeUnit
timeUnit	string	"d"	Unit of time step (y|d|h|m|s)

a) 2000/01/01T00:00:00

2.6.2 Outputs

Parameter	Type	Default	Description
steps	int	0	Number of steps from begin to end
stepWithinDay	int	0	Step number within day
stepsPerDay	int	0	Number of steps per day
date	date	null	Current date
time	time	null	Current time of the day
dateTime	datetime	null	Current date and time
atMidnight	bool	FALSE	Just past midnight?
timeStepSecs	double	0.0	Time step duration
timeStepDays	double	0.0	Time step duration
totalTimeSteps	int	0	Total number of time steps since calendar was reset
totalTime	int	0	Total time since calendar was reset; in units of timeUnit
totalDays	double	0.0	Total time since calendar was reset in days

`dayOfYear`	`int`	`0`	Julian day
`bareDate`	`baredate`	`null`	`date` as a bare date

2.7 Class: Combinations

2.7.1 Outputs

Parameter	Type	Default	Description
`iterations`	`int`	`0`	Total number of combinations

2.8 Class: Computation

2.8.1 Outputs

Parameter	Type	Default	Description
`step`	`string`	`construct`	Name of current computation step

2.9 Class: Date

2.9.1 Inputs

Parameter	Type	Default	Description
`dmy`	`string`		A date string
`day`	`int`	`1`	Day of month
`month`	`int`	`1`	Month
`year`	`int`	`2000`	Year

2.9.2 Outputs

Parameter	Type	Default	Description
`date`	`date`	`null`	The date constructed
`value`	`date`	`null`	Synonym for `date`

2.10 Class: DateSplit

2.10.1 Inputs

Parameter	Type	Default	Description
`date`	`date`	`null`	The date to split

2.10.2 Outputs

Parameter	Type	Default	Description
`day`	`int`	`0`	Day of month
`month`	`int`	`0`	Month
`year`	`int`	`0`	Year

2.11 Class: DateTime

2.11.1 Inputs

Parameter	Type	Default	Description

dateTimeString	string		A datetime string
day	int	1	Day of month
month	int	1	Month
year	int	2000	Year
hour	int	0	Hour of the day
minute	int	0	Minute of the hour
second	int	0	Second of the minute

2.11.2 Outputs

Parameter	Type	Default	Description
dateTime	datetime	null	The datetime constructed
value	datetime	null	Synonym for dateTime

2.12 Class: DateTimeSignal

2.12.1 Inputs

Parameter	Type	Default	Description
initialSignal	double	0.0	Value of signal at reset
initialFlag	bool	FALSE	Value of flag at reset
currentDateTime	datetime	a)	
beginDate	baredate	1/1	The beginning of the date interval
endDate	baredate	31/12	The end of the date interval
beginTime	time	00:00:00	The beginning of the time interval
endTime	time	00:00:00	The end of the time interval
signalInside	double	1.0	Resulting signal when day and time are inside the day and time intervals
signalOutside	double	0.0	Resulting signal when day and time are outside the day and time intervals
circadian	bool	TRUE	Tells whether signal follows a daily rythm

a) calendar[dateTime]

2.12.2 Outputs

Parameter	Type	Default	Description
signal	double	0.0	Value of the signal
flagIsUp	bool	FALSE	Is the signal on?
flagJustRaised	bool	FALSE	Was the signal just set on?
flagJustLowered	bool	FALSE	Was the signal just set off?
value	double	0.0	Synonym for signal

2.12.3 Usage

DateTimeSignal is derived from the BaseSignal box.

2.13 Class: DayDegrees

2.13.1 Inputs

Parameter	Type	Default	Description
T	double	a)	
timeStepDays	double	b)	
resetTotal	bool	FALSE	Reset total zero?
isTicking	bool	TRUE	Is the physiological time running? Else step will be zero
T0	double	0.0	Lower temperature threshold
Topt	double	100.0	Optimum temperate; linear decline from here to Tmax
Tmax	double	100.0	Upper temperature threshold

a) weather[Tavg]
b) calendar[timeStepDays]

2.13.2 Outputs

Parameter	Type	Default	Description
step	double	0.0	Increment in day-degrees
total	double	0.0	Total time since reset

2.14 Class: DemandBudget

2.14.1 Inputs

Parameter	Type	Default	Description
demandNet	double	0.0	Net demand
demandResp	double	0.0	Respiration demand
egested	double	0.0	Egested or unused fraction of prey
conversionCost	double	0.0	Cost of converting prey into consumer)

2.14.2 Outputs

Parameter	Type	Default	Description
demandGross	double	0.0	Gross demand including all expenditures

2.15 Class: DewPoint

2.15.1 Inputs

Parameter	Type	Default	Description
temperature	double	0.0	Air temperature
rh	double	0.0	Air relative humidity

2.15.2 Outputs

Parameter	Type	Default	Description

value	double	0.0	Dew point temperature

2.16 Class: Distribution

2.16.1 Inputs

Parameter	Type	Default	Description
input	double	0.0	the input port to anayse
divisor	double	100.0	Divisor applied to `sections
sections	vec_int	a)	Sections applied at the end of every iteration
steps	int	/.[steps]	

a) `c(1,5,25,50,75,95,99)`

2.17 Class: FixedSignal

2.17.1 Inputs

Parameter	Type	Default	Description
initialSignal	double	0.0	Value of `signal` at reset
initialFlag	bool	FALSE	Value of flag at reset

2.17.2 Outputs

Parameter	Type	Default	Description
signal	double	0.0	Value of the signal
flagIsUp	bool	FALSE	Is the `signal` on?
flagJustRaised	bool	FALSE	Was the `signal` just set on?
flagJustLowered	bool	FALSE	Was the `signal` just set off?
value	double	0.0	Synonym for `signal`

2.18 Class: FoodWeb

2.18.1 Inputs

Parameter	Type	Default	Description
timeStep	double	1.0	Simulation time step

2.19 Class: FoodWebCalcParasiteHost

2.19.1 Inputs

Parameter	Type	Default	Description
timeStep	double	.. [timeStep]	

2.20 Class: FoodWebCalcPredatorPrey

2.20.1 Inputs

Parameter	Type	Default	Description

timeStep	double	.. [timeStep]	

2.21 Class: FunctionalResponse

2.21.1 Inputs

Parameter	Type	Default	Description
attacker	double	0.0	Attacker density
prey	double	0.0	Resource density
demandGross	double	0.0	Gross demand of attacker
attackRate	double	0.0	#attacks per #prey per #predator per time unit
timeStep	double	1.0	Time step

2.21.2 Outputs

Parameter	Type	Default	Description
supplyGross	double	0.0	Gross supply (number of prey attacked)
propPreyAttacked	double	0.0	The proportion of prey attacked
searchEfficacy	double	0.0	Efficacy in finding prey [0;1]
sdRatioGross	double	0.0	Predator's gross supply/demand ratio

2.22 Class: Host

2.22.1 Inputs

Parameter	Type	Default	Description
density	double	0.0	Density
attackRate	double	0.0	Attack rate
gainFactor	double	1.0	Conversion of resource into supply units

2.22.2 Outputs

Parameter	Type	Default	Description
propAttacked	double	0.0	Proportion of hosts attacked
numAttacked	double	0.0	Number of hosts attacked

2.23 Class: Hump

2.23.1 Inputs

Parameter	Type	Default	Description
x	double	0.0	x-value at which to calculate curve value
x0	double	0.0	Beginning of curve
x1	double	1.0	End of curve
ymin	double	0.0	Minimum value of curve
ymax	double	1.0	Maximum value of curve

ditch	bool	FALSE	Is the curve a ditch?

2.23.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Curve value at x-value

2.24 Class: IgnoredBox

2.25 Class: LobryRossoFlandrois

2.25.1 Inputs

Parameter	Type	Default	Description
T	double	a)	
timeStepDays	double	b)	
resetTotal	bool	FALSE	Reset `total` zero?
isTicking	bool	TRUE	Is the physiological time running? Else `step` will be zero
Tmin	double	0.0	Lower temperature threshold
Topt	double	0.0	Optimal temperature
Tmax	double	0.0	Upper temperature threshold
maximum	double	0.0	Maximum development rate

a) `weather[Tavg]`
b) `calendar[timeStepDays]`

2.25.2 Outputs

Parameter	Type	Default	Description
step	double	0.0	Increment in physiological time units (PTU)
total	double	0.0	Total time since reset

2.26 Class: Maker

2.26.1 Inputs

Parameter	Type	Default	Description
replicates	int	1	Supply either, (1) the number of clones to replicate from child boxes;
names	vec_string	null	or (2) the names of clones;
fileName	string		or (3) a file; each line specifies a clone; column headings label inputs to each clone.

2.27 Class: Maximum

2.27.1 Inputs

Parameter	Type	Default	Description
values	vec_double	null	Input values

2.27.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Maximum of inputs; zero if no inputs
count	int	0	Number of inputs

2.28 Class: MaximumAt

2.28.1 Inputs

Parameter	Type	Default	Description
step	int	/.[step]	
track	double	0.0	Value to track for max value

2.28.2 Outputs

Parameter	Type	Default	Description
at	int	0	Step in which maximum value was attained
value	double	0.0	The maximum value attained

2.29 Class: Mean

2.29.1 Inputs

Parameter	Type	Default	Description
values	vec_double	null	Input values

2.29.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Average of inputs; zero if no inputs
count	int	0	Number of inputs

2.30 Class: Message

2.30.1 Inputs

Parameter	Type	Default	Description
text	string		Text message to print
when	string		In which step to print the message (reset, initialize, etc.)

2.31 Class: Minimum

2.31.1 Inputs

Parameter	Type	Default	Description
values	vec_double	null	Input values

2.31.2 Outputs

Parameter	Type	Default	Description

value	double	0.0	Minimum of inputs; zero if no inputs
count	int	0	Number of inputs

2.32 Class: Multiplum

2.32.1 Inputs

Parameter	Type	Default	Description
factors	vec_double	null	Input factors

2.32.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	The multiplum

2.33 Class: NumberedFile

2.33.1 Inputs

Parameter	Type	Default	Description
fileName	string		File name with extension, with/without a path
evaluationOrder	int	0	Number to append to file name
numberWidth	int	0	Number will be left-filled with zero up to this width

2.33.2 Outputs

Parameter	Type	Default	Description
value	string		File name with number

2.34 Class: OffsetDateTime

2.34.1 Inputs

Parameter	Type	Default	Description
dateTime	datetime	null	Date-time that will be offset
days	int	0	Offset (negative or positive)
hours	int	0	Offset (negative or positive)
minutes	int	0	Offset (negative or positive)

2.34.2 Outputs

Parameter	Type	Default	Description
value	datetime	null	Offset date-time

2.35 Class: OnOff

2.35.1 Inputs

Parameter	Type	Default	Description
x	double	0.0	x-value at which to calculate value

xOn	double	0.0	Lower threshold
xOff	double	0.0	Upper threshold
valueOn	double	1.0	Value inside [xOn,xOff] interval
valueOff	double	0.0	Value outside [xOn,xOff] interval
isSticky	bool	FALSE	Should remain on when switched on?

2.35.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Current on or off value
isOn	bool	FALSE	Is switch on?

2.36 Class: OnOffByDate

2.36.1 Inputs

Parameter	Type	Default	Description
x	date	null	x-value at which to calculate value
xOn	baredate	null	Lower threshold
xOff	baredate	null	Upper threshold
valueOn	double	1.0	Value inside [xOn,xOff] interval
valueOff	double	0.0	Value outside [xOn,xOff] interval
isSticky	bool	FALSE	Should remain on when switched on?

2.36.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Current on or off value
isOn	bool	FALSE	Is switch on?

2.37 Class: OutputR

2.37.1 Inputs

Parameter	Type	Default	Description
keepPlots	bool	TRUE	Keep previous plots before showing new plots in R?
clearMemory	bool	FALSE	Clear R memory?
showPlots	bool	TRUE	Show plots in R?
showLines	int	0	Number of lines to show at the prompt
popUp	bool	FALSE	Show plots in pop-up windows?
width	double	7.0	Width of pop-up windows (only used if popUp is set)
height	double	7.0	Height of pop-up windows (only used if popUp is set)
maximizeWindow	bool	FALSE	Maximize plot window size?

fontSize	double	0.0	Only used if >0
lineWidth	double	1.0	Width of lines in plots
plotAsList	bool	FALSE	Put plots into an R list?
saveDataFrame	bool	FALSE	Save output as R data frame?
skipFormats	bool	a)	
code	string		R code to be run before 'scripts'
scripts	vec_string	null	R scripts to be run at the end
plotTypes	vec_string	b)	
clearPlots	bool	FALSE	Deprecated
hasError	bool	/. [hasError]	

a) OutputWriter::*[skipFormats]
b) PlotR::*[type]

2.37.2 Outputs

Parameter	Type	Default	Description
ports	path	a)	Path to all ports used by my pages and plots
numPages	int	0	Number of pages in this output

a) ./PageR::*[xAxis]|./*/PlotR::*[ports]

2.38 Class: OutputSelector

2.38.1 Inputs

Parameter	Type	Default	Description
beginStep	int	0	Output is written when this step is reached
beginDateTime	datetime	null	Output is written when this time point is reached (optional)
step	int	/.[step]	
dateTime	datetime	a)	
period	int	1	If >1: A row of output will be produced with this period
summary	string	"average"	Either "average" or "current"; how values are summarized over the given period
final	bool	FALSE	Overrules period
useLocalDecimalChar	bool	FALSE	Use local decimal character in output?
skipFormats	bool	b)	

a) if exists(Calendar::*[dateTime]) then Calendar::*[dateTime] else .[beginDateTime]
b) ! exists(OutputR::*[skipFormats])

2.38.2 Outputs

Parameter	Type	Default	Description

isActive	bool	FALSE	Should output be written?
isSkipping	bool	FALSE	Are lines being skipped?

2.39 Class: OutputText

2.39.1 Inputs

Parameter	Type	Default	Description
ports	path	null	Path to port(s) to output

2.40 Class: OutputWriter

2.40.1 Inputs

Parameter	Type	Default	Description
showPorts	bool	FALSE	Shows a table of the ports to be written
ports	path	a)	
skipFormats	bool	b)	
useLocalDecimalChar	bool	c)	
isSkipping	bool	d)	
isActive	bool	e)	
period	int	f)	
summary	string	g)	

a) `/.[iteration]|/.[step]|OutputText::*[ports]|OutputR::*[ports]`
b) `OutputSelector::*[skipFormats]`
c) `OutputSelector::*[useLocalDecimalChar]`
d) `OutputSelector::*[isSkipping]`
e) `OutputSelector::*[isActive]`
f) `OutputSelector::*[period]`
g) `OutputSelector::*[summary]`

2.40.2 Outputs

Parameter	Type	Default	Description
filePath	string		Name of output file including absolute path
decimalChar	string		Decimal character used in output

2.41 Class: PageR

2.41.1 Inputs

Parameter	Type	Default	Description
xAxis	path	/.[step]	Port(s) on x-axis
title	string		Title shown on page
ncol	int	-1	No. of columns to arrange plots in
nrow	int	-1	No. of rows to arrange plots in
commonLegend	bool	FALSE	Collate legends of blots into one common legend

legendPosition	string	"bottom"	If 'commonLegend' then place legend here
width	double	..[width]	
height	double	..[height]	
maximizeWindow	bool	a)	
fontSize	double	.. [fontSize]	
plotAsList	bool	b)	
popUp	bool	..[popUp]	
numPages	int	.. [numPages]	
layouts	vec_string	c)	

a) ..[maximizeWindow]
b) ..[plotAsList]
c) ./PlotR::*[layout]

2.42 Class: Parasite

2.42.1 Inputs

Parameter	Type	Default	Description
density	double	0.0	Density
demand	double	0.0	Amount of resource needed

2.42.2 Outputs

Parameter	Type	Default	Description
supply	double	0.0	Total amount of resource acquired
sdRatio	double	0.0	Total supply/demand ratio

2.43 Class: PlotR

2.43.1 Inputs

Parameter	Type	Default	Description
ports	path	null	Port(s) on y-axis
layout	string	"facetted"	Either "merged" or "facetted"
type	string	"default"	Type of plot (default|density|histogram(nbins)|SobolConvergence|SobolIndices)
guideTitle	string		Title of guide legends
ggplot	string		R code that will be added to the ggplot
end	string		Deprecated
endCode	string		Deprecated
maxData	int	0	Max. number of data rows to plot; ignored if zero
ncol	int	-1	Number of columns in arrangement of plots; -1 keeps default

nrow	int	-1	Number of rows in arrangement of plots; -1 keeps default
direction	string	"row"	Fill in plots by 'row' or 'col'
iteration	int	a)	
xAxis	path	..[xAxis]	
width	double	..[width]	
height	double	..[height]	
fontSize	int	..[fontSize]	
plotAsList	bool	b)	

a) /.[iteration]
b) ..[plotAsList]

2.44 Class: PopUp

2.44.1 Inputs

Parameter	Type	Default	Description
title	string		Title
text	string		Short informative text
details	string		Further details
buttons	vec_string	c("OK")	Vector of buttons to show: (OK Yes No)
defaultButton	string	"OK"	Button assumed when Return is typed
escapeButton	string	"OK"	Button assumed when Esc is typed
icon	string	a)	Icon to show
when	string	"initialize"	In which step to show message, e.g., "initialize" or "debrief"
show	bool	TRUE	Determines whether pop-up will be shown

a) "information"

2.44.2 Outputs

Parameter	Type	Default	Description
answer	string		Name of button pushed
accepted	bool	FALSE	Question accepted?

2.45 Class: Population

2.45.1 Inputs

Parameter	Type	Default	Description
initial	double	100.0	
ageIncrement	double	0.0	
bufferSize	int	100	
firstCohortGain	double	0.0	

cohortsGain	vec_double	null	
cohortsLoss	vec_double	null	

2.45.2 Outputs

Parameter	Type	Default	Description
lastCohortSpill	double	0.0	
cohorts	vec_double	null	
age	vec_double	null	

2.46 Class: Predator

2.46.1 Inputs

Parameter	Type	Default	Description
density	double	0.0	Density
demand	double	0.0	Amount of resource needed

2.46.2 Outputs

Parameter	Type	Default	Description
supply	double	0.0	Total amount of resource acquired
sdRatio	double	0.0	Total supply/demand ratio

2.47 Class: Prey

2.47.1 Inputs

Parameter	Type	Default	Description
density	double	0.0	Density
attackRate	double	0.0	Attack rate
gainFactor	double	1.0	Conversion of resource into supply units

2.47.2 Outputs

Parameter	Type	Default	Description
loss	double	0.0	Amount of prey lost to predators
mortality	double	0.0	Mortality caused by predators

2.48 Class: PrioritySignal

2.48.1 Inputs

Parameter	Type	Default	Description
initialSignal	double	0.0	Value of signal at reset
initialFlag	bool	FALSE	Value of flag at reset
myFlags	vec_bool	a)	
mySignals	vec_double	b)	

reverseOrder	bool	FALSE	Find first signal!=0 from top (false) or bottom (true)?

a) ./BaseSignal::*[flagIsUp]
b) ./BaseSignal::*[signal]

2.48.2 Outputs

Parameter	Type	Default	Description
signal	double	0.0	Value of the signal
flagIsUp	bool	FALSE	Is the signal on?
flagJustRaised	bool	FALSE	Was the signal just set on?
flagJustLowered	bool	FALSE	Was the signal just set off?
value	double	0.0	Synonym for signal

2.49 Class: ProportionalSignal

2.49.1 Inputs

Parameter	Type	Default	Description
initialSignal	double	0.0	Value of signal at reset
initialFlag	bool	FALSE	Value of flag at reset
input	double	25.0	Value determining the signal
threshold	double	25.0	Input threshold above which the signal is changing
thresholdBand	double	5.0	Interval of the input over which the signal is changing
minSignal	double	0.0	Minimum possible signal
maxSignal	double	100.0	Maximum possible signal
increasingSignal	bool	TRUE	Is the signal increasing inside the threshold band?

2.49.2 Outputs

Parameter	Type	Default	Description
signal	double	0.0	Value of the signal
flagIsUp	bool	FALSE	Is the signal on?
flagJustRaised	bool	FALSE	Was the signal just set on?
flagJustLowered	bool	FALSE	Was the signal just set off?
value	double	0.0	Synonym for signal

2.50 Class: RandomBinomial

2.50.1 Inputs

Parameter	Type	Default	Description
P	double	0.5	Probability of event

drawAtInitialize	bool	a)	
drawAtReset	bool	b)	
drawAtUpdate	bool	c)	
min	bool	FALSE	Not used
max	bool	TRUE	Not used

a) ancestors::*/RandomiserBase::*[drawAtInitialize]
b) ancestors::*/RandomiserBase::*[drawAtReset]
c) ancestors::*/RandomiserBase::*[drawAtUpdate]

2.50.2 Outputs

Parameter	Type	Default	Description
value	bool	FALSE	The most recently drawn value

2.51 Class: RandomLogNormal

2.51.1 Inputs

Parameter	Type	Default	Description
P	double	0.95	Range of the distribution covered by the [minValue;maxValue] range
drawAtInitialize	bool	a)	
drawAtReset	bool	b)	
drawAtUpdate	bool	c)	
min	double	0.01	Minimum value (included)
max	double	1.0	Maximum value (excluded)

a) ancestors::*/RandomiserBase::*[drawAtInitialize]
b) ancestors::*/RandomiserBase::*[drawAtReset]
c) ancestors::*/RandomiserBase::*[drawAtUpdate]

2.51.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	The most recently drawn value

2.52 Class: RandomLogUniform

2.52.1 Inputs

Parameter	Type	Default	Description
P	double	0.95	Range of the distribution covered by the [minValue;maxValue] range
drawAtInitialize	bool	a)	
drawAtReset	bool	b)	
drawAtUpdate	bool	c)	
min	double	0.01	Minimum value (included)
max	double	1.0	Maximum value (excluded)

a) `ancestors::*/RandomiserBase::*[drawAtInitialize]`
b) `ancestors::*/RandomiserBase::*[drawAtReset]`
c) `ancestors::*/RandomiserBase::*[drawAtUpdate]`

2.52.2 Outputs

Parameter	Type	Default	Description
`value`	`double`	`0.0`	The most recently drawn value

2.53 Class: RandomNormal

2.53.1 Inputs

Parameter	Type	Default	Description
`P`	`double`	`0.95`	Range of the distribution covered by the [minValue;maxValue] range
`drawAtInitialize`	`bool`	a)	
`drawAtReset`	`bool`	b)	
`drawAtUpdate`	`bool`	c)	
`min`	`double`	`0.0`	Minimum value (included)
`max`	`double`	`1.0`	Maximum value (excluded)

a) `ancestors::*/RandomiserBase::*[drawAtInitialize]`
b) `ancestors::*/RandomiserBase::*[drawAtReset]`
c) `ancestors::*/RandomiserBase::*[drawAtUpdate]`

2.53.2 Outputs

Parameter	Type	Default	Description
`value`	`double`	`0.0`	The most recently drawn value

2.54 Class: RandomUniform

2.54.1 Inputs

Parameter	Type	Default	Description
`P`	`double`	`0.95`	Range of the distribution covered by the [minValue;maxValue] range
`drawAtInitialize`	`bool`	a)	
`drawAtReset`	`bool`	b)	
`drawAtUpdate`	`bool`	c)	
`min`	`double`	`0.0`	Minimum value (included)
`max`	`double`	`1.0`	Maximum value (excluded)

a) `ancestors::*/RandomiserBase::*[drawAtInitialize]`
b) `ancestors::*/RandomiserBase::*[drawAtReset]`
c) `ancestors::*/RandomiserBase::*[drawAtUpdate]`

2.54.2 Outputs

Parameter	Type	Default	Description

value	double	0.0	The most recently drawn value

2.55 Class: RandomUniformInt

2.55.1 Inputs

Parameter	Type	Default	Description
P	double	0.95	Range of the distribution covered by the [minValue;maxValue] range
drawAtInitialize	bool	a)	
drawAtReset	bool	b)	
drawAtUpdate	bool	c)	
min	int	0	Minimum value (included)
max	int	1	Maximum value (included)

a) ancestors::*/RandomiserBase::*[drawAtInitialize]
b) ancestors::*/RandomiserBase::*[drawAtReset]
c) ancestors::*/RandomiserBase::*[drawAtUpdate]

2.55.2 Outputs

Parameter	Type	Default	Description
value	int	0	The most recently drawn value

2.56 Class: RandomiserMonteCarlo

2.56.1 Inputs

Parameter	Type	Default	Description
iteration	int	a)	
iterations	int	b)	
doSensitivityAnalysis	bool	FALSE	Carry out a sensitivity analysis?
bootstrapSize	int	1000	Size of bootstrap sample (cheap in computation time); only used in sensitivity analysis
seed	int	0	Seed for random numbers; if this is zero a random seed value will be used
drawAtInitialize	bool	FALSE	Draw a value when a box is initialized?
drawAtReset	bool	TRUE	Draw a value when a box is reset?
drawAtUpdate	bool	FALSE	Draw a value when a box is updated?

a) /.[iteration]
b) /.[iterations]

2.56.2 Outputs

Parameter	Type	Default	Description
numVariables	int	0	Number of variables which are randomised

2.57 Class: RandomiserSobolSequence

2.57.1 Inputs

Parameter	Type	Default	Description
iteration	int	a)	
iterations	int	b)	
doSensitivityAnalysis	bool	FALSE	Carry out a sensitivity analysis?
bootstrapSize	int	1000	Size of bootstrap sample (cheap in computation time); only used in sensitivity analysis
seed	int	0	Seed for random numbers; if this is zero a random seed value will be used
drawAtInitialize	bool	FALSE	Draw a value when a box is initialized?
drawAtReset	bool	TRUE	Draw a value when a box is reset?
drawAtUpdate	bool	FALSE	Draw a value when a box is updated?

a) /.[iteration]
b) /.[iterations]

2.57.2 Outputs

Parameter	Type	Default	Description
numVariables	int	0	Number of variables which are randomised

2.58 Class: RandomiserStratified

2.58.1 Inputs

Parameter	Type	Default	Description
iteration	int	a)	
iterations	int	b)	
doSensitivityAnalysis	bool	FALSE	Carry out a sensitivity analysis?
bootstrapSize	int	1000	Size of bootstrap sample (cheap in computation time); only used in sensitivity analysis
seed	int	0	Seed for random numbers; if this is zero a random seed value will be used
drawAtInitialize	bool	FALSE	Draw a value when a box is initialized?
drawAtReset	bool	TRUE	Draw a value when a box is reset?
drawAtUpdate	bool	FALSE	Draw a value when a box is updated?

a) /.[iteration]
b) /.[iterations]

2.58.2 Outputs

Parameter	Type	Default	Description
numVariables	int	0	Number of variables which are randomised

2.59 Class: Ratio

2.59.1 Inputs

Parameter	Type	Default	Description
denominator	double	0.0	Number to be divided
divisor	double	0.0	The divisor
zeroTolerance	double	0.0	Used for infinity check
allowInfinityResult	bool	TRUE	Will yield an error if divisor < zeroTolerance

2.59.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	The ratio

2.60 Class: Records

2.60.1 Inputs

Parameter	Type	Default	Description
fileName	string	a)	Name of file with records; columns separated by white space
dateColumnName	string	"Date"	Name of column with date
timeColumnName	string	"Time"	Name of column with time
cycle	bool	FALSE	Cycle back to start at end of file? Forces ignoreYear=true
ignoreYear	bool	FALSE	Ignore year when synchronising with the calendar
calendarDateTime	datetime	b)	

a) "records.txt"
b) calendar[dateTime]

2.60.2 Outputs

Parameter	Type	Default	Description
firstDateTime	datetime	null	Date-time stamp of the first line in the file
lastDateTime	datetime	null	Date-time stamp of the last line in the file
currentDateTime	datetime	null	Date-time stamp of the current outputs
nextDateTime	datetime	null	Date-time stamp of the next outputs
currentDate	date	null	Date stamp of the current outputs
nextDate	date	null	Date stamp of the next outputs
currentTime	time	null	Time stamp of the current outputs
nextTime	time	null	Time stamp of the next outputs

2.61 Class: RunningAverageSteps

2.61.1 Inputs

Parameter	Type	Default	Description
`initial`	`double`	`0.0`	Value at reset
`input`	`double`	`0.0`	The input to sum or average
`count`	`int`	`1`	Number of steps to average over

2.61.2 Outputs

Parameter	Type	Default	Description
`value`	`double`	`0.0`	Running sum or average

2.62 Class: RunningAverageTimed

2.62.1 Inputs

Parameter	Type	Default	Description
`initial`	`double`	`0.0`	Value at reset
`input`	`double`	`0.0`	The input to sum or average
`timeWindow`	`double`	`1.0`	Time window to average over in units of timeUnit
`timeUnit`	`string`	`"d"`	Unit of time window
`timeStepSecs`	`double`	a)	

a) `calendar[timeStepSecs]`

2.62.2 Outputs

Parameter	Type	Default	Description
`value`	`double`	`0.0`	Running sum or average
`count`	`int`	`0`	Number of steps averages over

2.63 Class: RunningSumSteps

2.63.1 Inputs

Parameter	Type	Default	Description
`initial`	`double`	`0.0`	Value at reset
`input`	`double`	`0.0`	The input to sum or average
`count`	`int`	`1`	Number of steps to average over

2.63.2 Outputs

Parameter	Type	Default	Description
`value`	`double`	`0.0`	Running sum or average

2.64 Class: RunningSumTimed

2.64.1 Inputs

Parameter	Type	Default	Description
initial	double	0.0	Value at reset
input	double	0.0	The input to sum or average
timeWindow	double	1.0	Time window to average over in units of timeUnit
timeUnit	string	"d"	Unit of time window
timeStepSecs	double	a)	

a) calendar[timeStepSecs]

2.64.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Running sum or average
count	int	0	Number of steps averages over

2.65 Class: Sah

2.65.1 Inputs

Parameter	Type	Default	Description
temperature	double	0.0	Temperature
value	double	0.0	Saturated absolute humidity

2.66 Class: Sandy

2.66.1 Inputs

Parameter	Type	Default	Description
xMin	double	0.0	
xMax	double	1.0	
yMax	double	1.0	
a	double	1.0	
b	double	1.0	
x	double	0.0	

2.66.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	

2.67 Class: Scenarios

2.67.1 Inputs

Parameter	Type	Default	Description

fileName	string	a)	Text file with columns, one for each output produced. One iteration is run for each line
title	string	"Scenario"	Name of column that holds title of scenario (optional)

a) "scenarios.txt"

2.67.2 Outputs

Parameter	Type	Default	Description
iterations	int	0	Number of iterations needed to run scenarios

2.68 Class: SelectFile

2.68.1 Inputs

Parameter	Type	Default	Description
folder	string		Relative path to folder
filter	string	"*.txt"	File filter
selectFileNumber	int	1	Which file to pick
fileNumberOffset	int	1	Offset for fileNumber, typically 0 or 1
showFileNames	bool	TRUE	Show set of file names?

2.68.2 Outputs

Parameter	Type	Default	Description
numFiles	int	0	Number of matching files
fileName	string		Name of selected file
fileNamePath	string		Name of selected file with absolute path

2.69 Class: SequenceByIteration

2.69.1 Inputs

Parameter	Type	Default	Description
counter	int	0	Current counter into values
min	double	0.0	Minimum value in sequence
max	double	1.0	Maximum value in sequence
by	double	0.1	Maximum value in sequence

2.69.2 Outputs

Parameter	Type	Default	Description
numValues	int	0	Number of values
values	vec_double	null	Vector of all values
value	double	0.0	Current value
iterations	int	0	The number of iterations needed to run through all values

2.70 Class: SequenceByStep

2.70.1 Inputs

Parameter	Type	Default	Description
counter	int	0	Current counter into values
min	double	0.0	Minimum value in sequence
max	double	1.0	Maximum value in sequence
by	double	0.1	Maximum value in sequence

2.70.2 Outputs

Parameter	Type	Default	Description
numValues	int	0	Number of values
values	vec_double	null	Vector of all values
value	double	0.0	Current value
steps	int	0	The number of steps needed to run through all values

2.71 Class: SeriesByIteration

2.71.1 Inputs

Parameter	Type	Default	Description
counter	int	0	Current counter into values
numbers	vec_double	null	Vector holding a series of values

2.71.2 Outputs

Parameter	Type	Default	Description
numValues	int	0	Number of values
values	vec_double	null	Vector of all values
value	double	0.0	Current value
iterations	int	0	The number of iterations needed to run through all values

2.72 Class: SeriesByStep

2.72.1 Inputs

Parameter	Type	Default	Description
counter	int	0	Current counter into values
numbers	vec_double	null	Vector holding a series of values

2.72.2 Outputs

Parameter	Type	Default	Description
numValues	int	0	Number of values
values	vec_double	null	Vector of all values

value	double	0.0	Current value
steps	int	0	The number of steps needed to run through all values

2.73 Class: Simulation

2.73.1 Inputs

Parameter	Type	Default	Description
iterations	int	1	Number of iterations to run
steps	int	a)	
stopIteration	bool	FALSE	Stop running after this iteration?
stopStep	bool	FALSE	Stop running after this step?
silent	bool	FALSE	Run without scrolling progress messages?
unattended	bool	FALSE	An unattended run will finish without accessing clipboard

a) `if exists(Calendar::*[steps]) then Calendar::*[steps] else 1`

2.73.2 Outputs

Parameter	Type	Default	Description
iteration	int	0	Iteration number (1,2,...)
step	int	0	Step number (0,1,2,...)
finalStep	int	0	Last completed step in simulation
executionTime	int	0	Duration of simulation run (ms)
hasRun	bool	FALSE	Has this simulation been run?
hasError	bool	FALSE	Did an error occur during simulation run?
errorMsg	string		Error message

2.74 Class: SineWaveTemperature

2.74.1 Inputs

Parameter	Type	Default	Description
recordsName	string	"weather"	Name of Records box holding temperature
TminName	string	"Tmin"	Name of column holding daily min. temperature
TmaxName	string	"Tmax"	Name of column holding daily max. temperature
morningOffset	double	0.5	Hours after sunrise when temperature is at minimum
afternoonOffset	double	3.0	Hours after noon when temperature is at maximum
time	time	a)	
sunrise	time	b)	
solarTime	time	c)	

timeStep	int	d)	
timeUnit	string	e)	

a) calendar[time]
b) calendar[sunrise]
c) calendar[trueSolarTime]
d) calendar[timeStep]
e) calendar[timeUnit]

2.74.2 Outputs

Parameter	Type	Default	Description
TminYesterday	double	0.0	Yesterday's Tmin
TmaxYesterday	double	0.0	Yesterday's Tmax
TminToday	double	0.0	Today's Tmin
TmaxToday	double	0.0	Today's Tmax
TminTomorrow	double	0.0	Tomorrow's Tmin
TmaxTomorrow	double	0.0	Tomorrow's Tmax
value	double	0.0	Sine-interpolated temperature

2.75 Class: SobolGFunction

2.75.1 Inputs

Parameter	Type	Default	Description
a	vec_double	null	Vector of parameters
x	vec_double	null	Vector of inputs

2.75.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	B value

2.76 Class: Split

2.76.1 Inputs

Parameter	Type	Default	Description
whole	double	0.0	The number to be split
proportions	vec_double	null	Vector of proportions; sum<=1

2.76.2 Outputs

Parameter	Type	Default	Description
pieces	vec_double	null	Vector holding proportions of whole; same length as proportions

2.77 Class: Stage

2.77.1 Inputs

Parameter	Type	Default	Description
initial	double	0.0	Initial amount of inflow
k	int	30	Distribution parameter; use small k for larger dispersion in output
duration	double	100.0	Average delay between inflow and outflow
timeStep	double	1.0	Time step
growthFactor	double	1.0	Factor by which outflow will be scaled relative to inflow
instantLossRate	double	0.0	Mortality applied before inflow is added [0..1]
phaseInflow	vec_double	null	Phase inflow cohorts (vector)
zeroLimit	double	1e-12	Cut contents to zero when total is less than this
inflow	double	0.0	Amount of inflow
phaseOutflowProportion	double	0.0	Proportion that will change phase in next time step

2.77.2 Outputs

Parameter	Type	Default	Description
content	double	0.0	Total content inside the stage
value	double	0.0	Synonym for 'content'
inflowSum	double	0.0	Sum of current stage inflow (scalar)
inflowTotal	double	0.0	Accumulated total stage inflow (scalar)
phaseInflowSum	double	0.0	Sum of current phase inflow cohorts (scalar)
phaseInflowTotal	double	0.0	Accumulated total phase inflow (scalar)
outflowSum	double	0.0	Sum of current stage outflow (scalar)
outflowTotal	double	0.0	Accumulated total stage outflow (scalar)
phaseOutflowSum	double	0.0	Sum of current phase outflow cohorts (scalar)
phaseOutflowTotal	double	0.0	Accumulated total phase outflow (scalar)
phaseOutflow	vec_double	null	Phase outflow cohorts (vector)
growth	double	0.0	Change in content+outflow during this time step
outflow	double	0.0	Outflow emerging from the stage

2.78 Class: StageAndPhase

2.78.1 Inputs

Parameter	Type	Default	Description
initial	double	0.0	Initial amount of inflow
k	int	30	Distribution parameter; use small k for larger dispersion in output

duration	double	100.0	Average delay between inflow and outflow
timeStep	double	1.0	Time step
growthFactor	double	1.0	Factor by which outflow will be scaled relative to inflow
instantLossRate	double	0.0	Mortality applied before inflow is added [0..1]
phaseInflow	vec_double	null	Phase inflow cohorts (vector)
zeroLimit	double	1e-12	Cut contents to zero when total is less than this
inflow	vec_double	null	Amount of inflow (vector)
scalarInflow	double	0.0	Amount of inflow (scalar)
phaseK	int	30	Phase distribution parameter
phaseDuration	double	100.0	Average delay between inflow and outflow through phase
phaseTimeStep	double	1.0	Time step for phase development

2.78.2 Outputs

Parameter	Type	Default	Description
content	double	0.0	Total content inside the stage
value	double	0.0	Synonym for 'content'
inflowSum	double	0.0	Sum of current stage inflow (scalar)
inflowTotal	double	0.0	Accumulated total stage inflow (scalar)
phaseInflowSum	double	0.0	Sum of current phase inflow cohorts (scalar)
phaseInflowTotal	double	0.0	Accumulated total phase inflow (scalar)
outflowSum	double	0.0	Sum of current stage outflow (scalar)
outflowTotal	double	0.0	Accumulated total stage outflow (scalar)
phaseOutflowSum	double	0.0	Sum of current phase outflow cohorts (scalar)
phaseOutflowTotal	double	0.0	Accumulated total phase outflow (scalar)
phaseOutflow	vec_double	null	Phase outflow cohorts (vector)
growth	double	0.0	Change in content+outflow during this time step
outflow	vec_double	null	Stage outflow cohorts (vector)

2.79 Class: Sum

2.79.1 Inputs

Parameter	Type	Default	Description
values	vec_double	null	Input values

2.79.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Sum of inputs; zero if no inputs
count	int	0	Number of inputs

2.80 Class: Sun

2.80.1 Inputs

Parameter	Type	Default	Description
latitude	double	a)	
longitude	double	b)	
dateTime	datetime	c)	
timeZone	double	d)	
altitude	double	0.0	Altitude above sea level

a) calendar[latitude]
b) calendar[longitude]
c) calendar[dateTime]
d) calendar[timeZone]

2.80.2 Outputs

Parameter	Type	Default	Description
sunrise	time	null	Time of sunrise
noon	time	null	Time of nonw
sunset	time	null	Time of sunset
solarTime	time	null	Solar time (noon=12:00:00
dayLength	double	0.0	Day length from sunrise to sunset
elevation	double	0.0	Solar angle to horizon
azimuth	double	0.0	Compass direction to sun (north=0)
isDay	bool	FALSE	Is the sun up?
isNight	bool	FALSE	Has the sun set?
solarConstant	double	0.0	The irradiation at the top of the atmosphere
angot	double	0.0	The irradiation on Earth surface under optimal atmospheric conditions

2.81 Class: SunDiffuseRadiation

2.81.1 Inputs

Parameter	Type	Default	Description
globalRadiation	double	0.0	Global radiation
angotRadiation	double	sun[angot]	

2.81.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Proportion diffuse light

2.82 Class: SuperFunctionalResponse

2.82.1 Inputs

Parameter	Type	Default	Description
attacker	double	0.0	Attacker density
host	double	0.0	Resource density
demand	double	0.0	Number of attacks demanded
attackRate	double	0.0	#attacks per #host per #attacker per time unit
timeStep	double	1.0	Time step

2.82.2 Outputs

Parameter	Type	Default	Description
supply	double	0.0	Number of attacks accomplished
hostsAttacked	double	0.0	The number of hosts attacked
propHostsAttacked	double	0.0	Proportion of hosts attacked
propAttackersAttacked	double	0.0	Proportion of successful attackers
sdRatio	double	0.0	Attackers's supply/demand ratio

2.83 Class: SupplyBudget

2.83.1 Inputs

Parameter	Type	Default	Description
supplyGross	double	0.0	Gross supply
demandNet	double	0.0	Net demand
demandResp	double	0.0	Respiration demand
egested	double	0.0	Egested or unused fraction of prey
conversionCost	double	0.0	Cost of converting prey into consumer)

2.83.2 Outputs

Parameter	Type	Default	Description
supplyNet	double	0.0	Net supply for predator assimilation
egestedAmount	double	0.0	Egested (or unused) amount of resource
conversionCostAmount	double	0.0	Cost of converting resource into consumer
sdRatioNet	double	0.0	Predator's net supply/demand ratio

2.84 Class: ThresholdSignal

2.84.1 Inputs

Parameter	Type	Default	Description
initialSignal	double	0.0	Value of signal at reset
initialFlag	bool	FALSE	Value of flag at reset
input	double	0.0	Input that is compared to threshold

`threshold`	`double`	`0.0`	Threshold value
`flagAbove`	`bool`	`TRUE`	Raise flag when input is at or above threshold?
`signalFlagged`	`double`	`1.0`	Signal when flagged
`signalUnflagged`	`double`	`0.0`	Signal when not flagged

2.84.2 Outputs

Parameter	Type	Default	Description
`signal`	`double`	`0.0`	Value of the signal
`flagIsUp`	`bool`	`FALSE`	Is the `signal` on?
`flagJustRaised`	`bool`	`FALSE`	Was the `signal` just set on?
`flagJustLowered`	`bool`	`FALSE`	Was the `signal` just set off?
`value`	`double`	`0.0`	Synonym for `signal`

2.85 Class: TimeToHours

2.85.1 Inputs

Parameter	Type	Default	Description
`time`	`time`	`00:00:00`	Time of day

2.85.2 Outputs

Parameter	Type	Default	Description
`value`	`double`	`0.0`	Hours since midnight

2.86 Class: VectorScaled

2.86.1 Inputs

Parameter	Type	Default	Description
`vector`	`vec_double`	`null`	Vector to be scaled
`factor`	`double`	`0.0`	Scaling factor

2.86.2 Outputs

Parameter	Type	Default	Description
`value`	`vec_double`	`null`	Scaled vector

2.87 Class: VectorSum

2.87.1 Inputs

Parameter	Type	Default	Description
`input`	`string`		Path to vectors (must have same length)

2.87.2 Outputs

Parameter	Type	Default	Description
`value`	`vec_double`	`null`	Sum; a vector of same length as the inputs

2.88 Class: boxesDocumentation

2.88.1 Inputs

Parameter	Type	Default	Description
title	string	a)	
authorNames	vec_string	null	
authorInstitutes	vec_string	null	
authorEmails	vec_string	null	

a) Basic building blocks

3 Module: callosobruchus

3.1 Class: DensityDependent

3.1.1 Inputs

Parameter	Type	Default	Description
seedCapacity	int	9	Number of beetles one seed can sustain
beetlesProducedTotal	double	0.0	Total number of beetles produced since stocking
seedsTotal	double	0.0	Total number of seeds stocked
k	double	8.17	Dispersion of the negative binomial
exponent	double	-0.496	Negative exponential response

3.1.2 Outputs

Parameter	Type	Default	Description
avgBeetlesProducedPerSeed	double	0.0	Average number of eggs per seed, laid since stocking
survival	double	0.0	Survival through juvenile life stages
damage	double	0.0	Proportion of seeds damaged

3.2 Class: Fecundity

3.2.1 Inputs

Parameter	Type	Default	Description
sexRatio	double	0.5	Proportion of females
temperature	double	0.0	Store temperature
slope	double	1.279	Fecundity response on temperature
intercept	double	-23.1	Fecundity response on temperature
minTemperature	double	25.0	No extrapolation below this temperature
maxTemperature	double	40.0	No extrapolation above this temperature

3.2.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Total eggs laid per female

3.3 Class: Stock

3.3.1 Inputs

Parameter	Type	Default	Description
size	double	100.0	Weight of seeds stored
seedsPerKg	double	7000.0	Number of seeds per kg put on storage

3.3.2 Outputs

Parameter	Type	Default	Description
seedsTotal	double	0.0	Total no. of seeds

3.4 Class: callosobruchusDocumentation

3.4.1 Inputs

Parameter	Type	Default	Description
title	string	a)	
authorNames	vec_string	null	
authorInstitutes	vec_string	null	
authorEmails	vec_string	null	

a) callosobruchus model

4 Module: cmbp

4.1 Class: DevRate

4.1.1 Inputs

Parameter	Type	Default	Description
b1	double	0.0	Regression parameter
b2	double	0.0	Regression parameter
b3	double	0.0	Regression parameter
b4	double	0.0	Regression parameter
T	double	0.0	Ambient temperature (oC)

4.1.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Daily development rate

4.2 Class: Emigration

4.2.1 Inputs

Parameter	Type	Default	Description
e2	double	0.0	Regression parameter
e3	double	0.0	Regression parameter
N	double	0.0	Adult density

4.2.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Peak curve

4.3 Class: ExponentialPeak

4.3.1 Inputs

Parameter	Type	Default	Description
d1	double	0.0	Regression parameter
d2	double	0.0	Regression parameter
x	double	0.0	Independent variable
optimum	double	0.0	x-value at peak y

4.3.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Peak curve

4.4 Class: Fecundity

4.4.1 Inputs

Parameter	Type	Default	Description
maxFecundity	double	700.0	Life-time fecundity of a female at 30oC
r	double	0.2359	Exponential increase in fecundity with temperature
T	double	0.0	Store temperature (oC)
sexRatio	double	0.5	Sex ratio [0;1]

4.4.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Life-time fecundity scaled by temperature

4.5 Class: GrainMoistureContent

4.5.1 Inputs

Parameter	Type	Default	Description
c1	double	0.523	Regression parameter
c2	double	-0.00967	Regression parameter
c3	double	7.06e-05	Regression parameter
rh	double	0.0	Ambient relative humidity (%)

4.5.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Grain moisture content (%)

4.6 Class: GrainStore

4.6.1 Inputs

Parameter	Type	Default	Description
Tmin	double	0.0	Outdoors daily minimum temperature (oC)
Tmax	double	0.0	Outdoors daily maximum temperature (oC)
Toffset	double	0.0	Offset for temperature inside the store (oC)
mass	double	500.0	Mass of stored grain (kg)

4.6.2 Outputs

Parameter	Type	Default	Description
T	double	0.0	Store temperature (oC

4.7 Class: Immigration

4.7.1 Inputs

Parameter	Type	Default	Description
number	double	0.0	Nuber of P.t. arriving
storeMass	double	500.0	Size of store (kg maize)
day	int	0	Day of immigration (no. of days after start)

4.7.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Immigrant increase in P.t. density (per kg

4.8 Class: SurvivalByDensity

4.8.1 Inputs

Parameter	Type	Default	Description
e1	double	0.0	Regression parameter
N	double	0.0	Adult density

4.8.2 Outputs

Parameter	Type	Default	Description
value	double	0.0	Peak curve

5 Module: command

5.1 Class: commandDocumentation

5.1.1 Inputs

Parameter	Type	Default	Description
title	string	a)	
authorNames	vec_string	null	

authorInstitutes	vec_string	null	
authorEmails	vec_string	null	

a) Commands for the prompt